

Milwaukee[®]

Nothing but **HEAVY DUTY.**[™]



2020

TO DEVELOP AND PRODUCE **NOTHING BUT HEAVY DUTY™** POWERTOOLS IS ONLY ONE PART OF THE **MILWAUKEE® PROMISE.**

These tools need to last day in and day out. For this reason, serviceability is incorporated into every tool produced.

All powertools leave the factory with a complete documentation package including instructions for use, listing of customer service centres and safety instructions. Milwaukee Tool has a worldwide service network.

Should a problem arise requiring assistance or support at short notice, you can rely on our service centres/agents worldwide.

The global network ensures that our customers' needs and requirements are shared to influence future product development.

Expertise and competence gained over many years ensures a fast and efficient professional repair service.



Milwaukee Tools strive to meet and surpass all international and European standards and directives for both design and safety. Constant research and development programs aim to anticipate and fulfil future market trends in all regulatory and efficiency requirements. Milwaukee Tool is, amongst others, an active member of EPTA (European Power Tool Association) and so is proudly aligned to all industry measurement standards agreed by the organization.

EXPERIENCE THE HEAVY DUTY DIFFERENCE

TOOLS BUILT TO DO THE JOB BETTER.

At Milwaukee Tool Heavy Duty is more than just a slogan. It is a promise to offer the best to professional users. Engineers at Milwaukee Tools don't just design tools.

They design tools to get the job done better, faster, reliably and safely.

www.milwaukeetool.co.uk



ALL YOU HAVE TO DO TO TAKE ADVANTAGE OF OUR EXTENDED WARRANTY OFFER IS TO REGISTER ONLINE. NOTHING BUT HEAVY DUTY™

NOTHING BUT HEAVY DUTY WARRANTY:



MILWAUKEE® tools & batteries come with a standard 1 year warranty. Warranty extensions are available by visiting www.milwaukeetool.co.uk.



MILWAUKEE® tools warranty can be extended from 1 year to a maximum of 3 years (1+2). With the exception of MX FUEL™ tools for which warranty can be extended from 1 year to a maximum of 2 years (1+1).



All MILWAUKEE® REDLITHIUM™ batteries including MX FUEL™ batteries come with a standard 1 year warranty which can be extended to a maximum of 2 years (1+1).

All warranty extensions are subject to registering online within 30 days of the purchase date.

Every MILWAUKEE® tool is tested according to a comprehensive certified process before leaving the factory and is guaranteed to be **NOTHING BUT HEAVY DUTY™** qualified. At Milwaukee Tool we take great pride in the products and services we offer to our professional customers.

The warranty extension is only available in those countries listed on our warranty registration website. The extended warranty offer excludes products used in the hire industry, battery chargers and accessories supplied.

For full terms and conditions please see www.milwaukeetool.co.uk

M18

UPGRADE.
OUTWORK.
OUTLAST.

IF IT'S M18 IT FITS

ONEKEY
UNLOCKING THE DIGITAL JOBSITE.



M18 FUEL



ONE SYSTEM
OVER

165
TOOLS

RED LITHIUM-ION
HIGH OUTPUT
BATTERY TECHNOLOGY

PERFORMANCE DRIVEN.
TRADE FOCUSED.
SYSTEM WIDE.

RED LITHIUM-ION
HIGH OUTPUT
BATTERY TECHNOLOGY

NEW M18 FUEL™

PERFORMANCE DRIVEN REDESIGN.


M18 FUEL™ is engineered for the most demanding tradesmen in the world. M18 FUEL™ delivers extreme performance in a compact structure and features three MILWAUKEE® exclusive innovations - the POWERSTATE™ brushless motor, REDLITHIUM™-ION battery pack and REDLINK PLUS™ intelligence hardware and software - that deliver incredible power, run time and durability.

Simply put, M18 FUEL™ offers the best, full system technology that drives, protects and powers your cordless tools.

**HIGHER POWER
EFFICIENCY*
UNDER LOAD**

**NEW
ADVANCED*
HEAVY DUTY CHUCK**

**NEW
EXTREME*
COMPACT DESIGN**

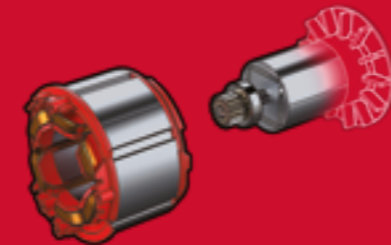

1 POWERSTATE™ BRUSHLESS MOTOR

- Milwaukee Tool designed and built brushless motor
- Provides increased efficiency
- Lasts longer and delivers maximum power*



M18 FUEL™

DRIVEN TO OUTPERFORM.™



2 REDLINK PLUS™ INTELLIGENCE

- Individual cell monitoring to optimise tool run time and ensure long term pack durability
- Advanced system electronics with unique digital performance enhancement
- Total system communication with overload protection increases tool life



3 REDLITHIUM™-ION BATTERY PACKS

- Total system communication with overload protection increases tool life
- Fade-free performance to deliver more run time and more work over pack life
- Fuel gauge displays remaining charge
- Operates down to -20°C

REDLITHIUM™-ION
HIGH OUTPUT
BATTERY TECHNOLOGY

REDLITHIUM™-ION



M18

OVER **165** **M18** **TOOLS**

REDLITHIUM™-ION AND REDLITHIUM™-ION HIGH OUTPUT™ SUPERIOR PACK CONSTRUCTION

IT LASTS LONGER, THINKS FASTER & WORKS HARDER*

BATTERY FUEL GAUGE

Displays remaining run time

PATENTED REDLINK™ INTELLIGENCE

Protects the pack in abusive situations, provides optimum performance and monitors the cells for maximum life

SHOCK RESPONSIVE SEPARATORS

Prevents pack failure from vibration or drops

SINGLE PIECE CELL CARRIER

Full enclosure protects cells and provides a strong structure delivering maximum durability

RUBBER OVERMOLD

Protects cells and pack during drops and provides maximum life



LATCH COVER

Prevents water from entering pack through the latch buttons

WATER PROTECTION BARRIER

Routes water away from the electronics and out of the battery pack

ELECTRONIC COATING

Protects the electronics from water and condensation

TEMP CONTROL CELL FRAME

Provides a strong structure and transfers energy efficiently for maximum life

REDLITHIUM™-ION BATTERY CELLS

Provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life

*Compared with previous MILWAUKEE® battery technology. Results dependent on voltage, tool and application.

WATER ELECTRONICS THERMAL IMPACT



NEW GENERATION REDLITHIUM™-ION HIGH OUTPUT™ BATTERIES

CHECK OUT OUR LATEST RUN TIME VIDEOS ON MILWAUKEE TOOL EUROPE
youtube.com/milwaukeetoolurope

| | | |
|-----------------------------------|---|--|
| REDLITHIUM™-ION CELLS | <ul style="list-style-type: none"> High power cell Fade free performance Lasts in extreme environments | HD REDLITHIUM™-ION HIGH OUTPUT™ BATTERY TECHNOLOGY IN ADDITION + New larger cell + Higher power density + Runs cooler + Lower electrical resistance |
| REDLINK™ ELECTRONICS | <ul style="list-style-type: none"> Individual cell monitoring Digital overload protection System performance optimisation M18™ system compatibility | IN ADDITION + New high power processor + Higher current handling + Maintains existing M18™ system compatibility |
| CONSTRUCTION | <ul style="list-style-type: none"> Best-in-class pack construction Long-lasting reliability Proven durability on the jobsite | IN ADDITION + New ground up construction + Improved current flow + Lower temperature rise |
| BENEFITS | WORKS FASTER, LONGER, HARDER & EXTREMER* <ul style="list-style-type: none"> Up to 20% more power* Up to 2x longer battery life* Up to 2.5x more run-time* Works down to -20°C | MOST POWERFUL MILWAUKEE® BATTERY EVER <ul style="list-style-type: none"> Up to 50% more power* Runs up to 50% cooler* Up to 33% more run-time* Works down to -28°C |
| APPLICATION RECOMMENDATION | ALL PROFESSIONAL TRADE APPLICATIONS | HIGH DEMAND APPLICATIONS REQUIRING HIGH OUTPUT CURRENT |
| RANGE | | |


* Vs Standard Lithium-Ion technologies

* Vs Standard REDLITHIUM™-ION batteries in high current draw applications

IF IT'S **M18** IT FITS

ONE-KEY™

UNLOCKING THE DIGITAL JOBSITE.

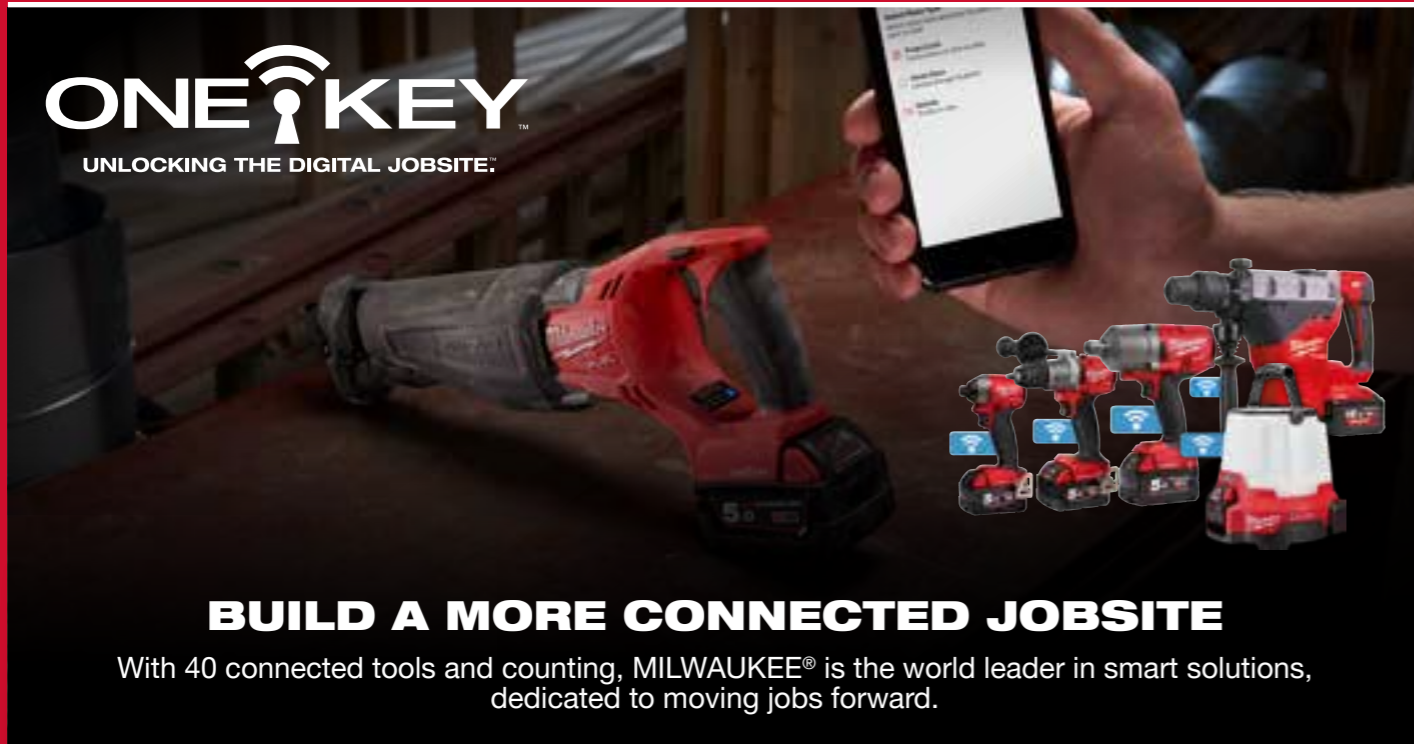

BUILD A MORE CONNECTED JOBSITE

With 40 connected tools and counting, MILWAUKEE® is the world leader in smart solutions, dedicated to moving jobs forward.

TRACK. MANAGE. CUSTOMISE.

CONNECTED SOLUTIONS, ADVANCING THE JOB

ONE-KEY™, the first digital platform for tools and equipment, combines a free-to-use inventory program with the industry's smartest tools. ONE-KEY™ provides a new level of control and access to information that's revolutionising the way work gets done.



DOWNLOAD THE FREE ONE-KEY™ APP VIA THE APP STORE, OR GOOGLE PLAY STORE, OR SIMPLY USE YOUR BROWSER



TRACK.

GROWING TRACKING NETWORK

With community Bluetooth® tracking, barcode scanning, and geo-fencing, staying on top of the tools and equipment is easy.

ONE-KEY™ gives complete control and visibility of the inventory across any job, crew, and location. Real-time alerts help prevent loss and expensive setbacks.



TICK™ Tool and Equipment Tracker
Versatile Bluetooth®** tracker that can be attached with glue, screws, rivets or straps on anything. It provides location updates (last seen date, time and location) when it comes within a 30 m range of any phone with the ONE-KEY™ App.



MANAGE.


EFFORTLESS INVENTORY MANAGEMENT

ONE-KEY™ inventory management streamlines the inventory process with one digital catalogue that the team can access from anywhere. It gives more insight on how the equipment is working via:


1. INVENTORY DASHBOARD



2. ITEM DETAIL



3. TOOL HISTORY



4. SERVICE REMINDERS



ONE-KEY™ allows to manage the assets from a computer, tablet, or smartphone. On the jobsite, in the office - accessible inventory for the team wherever they are.

CUSTOMISE.

OUTSTANDING TOOL CUSTOMISATION

ONE-KEY™ allows to customise the output of the machines to suit the application with the possibility to save and share configurations between tools. Utilising customisation increases tool run time and accessory life, resulting in saving time and money for the owner.



*Users within 30 m range of any phones, using the ONE-KEY™ App to track, manage and customise their fleet.
**The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by (TTI corporate name) is under license. Other trademarks and trade names are those of their respective owners.

M18 FHM

M18 FUEL

M18 FUEL™ ONE-KEY™ 8 KG SDS-MAX DRILLING AND BREAKING HAMMER

- The M18 FHM is the most productive SDS-Max tool Milwaukee Tool has produced, delivering AC power with the flexibility of the cordless M18™ platform
- Next generation POWERSTATE™ brushless motor, REDLINK PLUS™ electronics and REDLITHIUM™-ION HIGH OUTPUT™ 12.0 Ah battery pack deliver superior performance, durability and run time in high demand applications
- ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention
- AUTOSTOP™ shuts down the tool to protect the user after 45° of sharp movement in bind up situations
- Trigger lock on prevents users from having to hold trigger during long periods of chipping applications
- Large anti-vibration back handle supports two handed drilling applications whilst minimising vibration exposure
- Service light indicator illuminates when tool requires servicing
- Anti-vibration side handle for lower vibration exposure



| | M18 FHM-0C | M18 FHM-121C |
|---|--|---|
| Tool reception | SDS-Max | SDS-Max |
| Blow energy [EPTA][J] | 11.0 | 11.0 |
| Full load hammer action (bpm) | 0 - 2900 | 0 - 2900 |
| No load speed (rpm) | 0 - 380 | 0 - 380 |
| Max. drilling concrete (mm) | 45 | 45 |
| mx. drilling tunnel bit (mm) | 65 | 65 |
| Max. drilling core bit (mm) | 150 | 150 |
| Vibration drilling (m/s ²) | 9.4 | 9.4 |
| Vibration chiseling (m/s ²) | 7.8 | 7.8 |
| Weight with battery pack (kg) | - | 10.2 |
| Kit included | No batteries supplied, No charger supplied, Kitbox | 1 x 12.0 Ah Battery pack, M12-18 FC Charger, Kitbox |
| Article Number | 4933464893 | 4933464895 |



AUTOSTOP™ - maximum control, advanced safety



Trigger lock on for chiselling



ONE-KEY™ tracking and security

| | |
|--|------------|
| SDS-MAX DRILL BIT - 4 CUT - Ø28 MM, TOTAL LENGTH 570 MM | |
| Article Number | 4932352779 |

M18 CHM | M18 FUEL™ 5 KG SDS-MAX DRILLING AND BREAKING HAMMER

M18 FUEL

- The world's first 18V 5 kg SDS-Max hammer for maximum versatility and portability with equal performance to an AC tool
- Brushless POWERSTATE™ motor provides corded drilling performance
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- HIGH DEMAND™ 9.0 Ah REDLITHIUM™-ION battery pack delivers up to 5x more run time, up to 35% more power, up to 2x more battery life and operates better down to -20°C than other lithium-ion technologies
- Robust magnesium gear housing for tough environments, exact seat fitting of gear components and better cooling
- Roto-stop and multi position chisel function gives 12 different positions to optimise working angle and end-user ergonomics
- Low 10.6 m/s² vibration construction which enhances usage time per day
- Safety clutch protects operator and machine if drill bit jams
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 CHM-0C | M18 CHM-902C |
|---|--|---|
| Tool reception | SDS-Max | SDS-Max |
| Blow energy [EPTA][J] | 6.1 | 6.1 |
| Full load hammer action (bpm) | 0 - 3000 | 0 - 3000 |
| No load speed (rpm) | 0 - 450 | 0 - 450 |
| Max. drilling concrete (mm) | 40 | 40 |
| mx. drilling tunnel bit (mm) | 65 | 65 |
| Max. drilling core bit (mm) | 100 | 100 |
| Vibration drilling (m/s ²) | 10.6 | 10.6 |
| Vibration chiseling (m/s ²) | 9.6 | 9.6 |
| Weight with battery pack (kg) | - | 6.6 |
| Kit included | No batteries supplied, No charger supplied, Kitbox | 2 x 9.0 Ah Battery packs, M12-18 FC Charger, Kitbox |
| Article Number | 4933451362 | 4933451412 |

M18 CHPX

M18 FUEL™ HIGH PERFORMANCE 4-MODE SDS-PLUS HAMMER WITH FIXTEC™ CHUCK

M18 FUEL

- Milwaukee Tool designed and built brushless POWERSTATE™ motor
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- High powered motor gives corded tool performance
- Hardest hitting cordless SDS hammer in its class. Powerful hammer mechanism delivers 4.0 J (EPTA) of impact energy at low 8.6 m/s² vibrations thanks to the new dual rail anti-vibration system
- All metal gear case - optimum seating of the gears for enhanced service life
- 4-mode operation: rotary hammer, hammer only, rotation only and selectable work position of the chisel (variolock) for maximum versatility
- FIXTEC™ system - keyless chuck changing
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- Compatible with M18-28 CPDEX dust extractor
- Flexible battery system: works with all MILWAUKEE® M18™ batteries

| | M18 CHPX-0 | M18 CHPX-502X |
|---|--|---|
| Tool reception | SDS-Plus | SDS-Plus |
| Blow energy [EPTA][J] | 4.0 | 4.0 |
| Max. drilling wood (mm) | 30 | 30 |
| Max. drilling steel (mm) | 13 | 13 |
| Max. drilling concrete (mm) | 28 | 28 |
| Max. percussion rate (bpm) | 0 - 5000 | 0 - 5000 |
| Vibration drilling (m/s ²) | 8.6 | 8.6 |
| Vibration chiseling (m/s ²) | 7.1 | 7.1 |
| Weight with battery pack (kg) | - | 4.3 |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933446830 | 4933451382 |



Hardest hitting cordless hammer – 4.0 J



Low vibrations due to the new dual-rail anti-vibration system*



All metal gearcase

M18 CHX

M18 FUEL™ 4-MODE SDS-PLUS HAMMER WITH FIXTEC™ CHUCK

- Brushless POWERSTATE™ motor for up to 2x longer motor life and up to 25% more power
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Second hardest hitting SDS hammer in its class. Powerful hammer mechanism delivers 2.5 J of impact energy at low 8.9 m/s² vibrations
- Compact, ergonomic design for increased end user comfort
- All metal gear case - optimum seating of the gears for enhanced service life
- 4-mode operation: rotary hammer, hammer only, rotation only and selectable work position of the chisel (variolock) for maximum versatility
- FIXTEC™ system - keyless chuck changing

| | M18 CHX-0 | M18 CHX-502X |
|---|--|--------------|
| Tool reception | SDS-Plus | SDS-Plus |
| Blow energy [EPTA][J] | 2.5 | 2.5 |
| Max. drilling wood (mm) | 30 | 30 |
| Max. drilling steel (mm) | 13 | 13 |
| Max. drilling concrete (mm) | 26 | 26 |
| Max. percussion rate (bpm) | 0 - 5100 | 0 - 5100 |
| Vibration drilling (m/s ²) | 8.9 | 8.9 |
| Vibration chiseling (m/s ²) | 9.5 | 9.5 |
| Weight with battery pack (kg) | - | HD Box |
| Kit included | No batteries supplied, 2 x 5.0 Ah Battery packs, M12-18 FC HD Box, Charger, HD Box | |
| Article Number | 4933447420 | 4933451383 |



M18 FUEL



4-mode operation



Low 8.9 m/s² vibrations



All metal gearcase

HD18 HX | M18™ 4-MODE SDS-PLUS HAMMER WITH FIXTEC™ CHUCK

- High powered motor gives corded tool performance
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Powerful hammer mechanism: delivers 2.4 J (EPTA) of impact energy
- All metal gear case: optimum seating for gears to enhance service life
- 4-mode operation: rotary hammer, hammer only, rotation only and variolock for maximum versatility
- Variolock and hammer stop function
- FIXTEC™ system - keyless chuck changing
- Mechanical clutch: protects tool when bit binds up
- Anti-Vibration-System delivers max. comfort by minimising vibration
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | HD18 HX-0 | HD18 HX-402C |
|-------------------------------|---|--------------|
| Tool reception | SDS-Plus | SDS-Plus |
| Blow energy [EPTA][J] | 2.4 | 2.4 |
| Max. drilling wood (mm) | 30 | 30 |
| Max. drilling steel (mm) | 13 | 13 |
| Max. drilling concrete (mm) | 24 | 24 |
| Max. percussion rate (bpm) | 4200 | 4200 |
| Weight with battery pack (kg) | - | 3.7 |
| Kit included | No batteries supplied, 2 x 4.0 Ah Battery packs, M12-18 C HD Box, Charger, Kitbox | |
| Article Number | 4933408320 | 4933441283 |

M18

M18 BH | M18™ COMPACT 2-MODE SDS-PLUS HAMMER

- Superior power to weight ratio in its class 2.5 kg 1.2 J (EPTA)
- High performance 4-pole motor delivers maximum power whilst maximising the power to weight ratio
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- 2-mode operation: choose rotary hammer or rotation only for maximum versatility
- Low vibration value of 10.3 m/s²
- Optimised hammer drilling from 4 to 10 mm, max diameter 16 mm
- Forward & reverse switch for added versatility in fastening applications
- 43 mm neck size - compatible with M12 DE dust extractor
- Fuel gauge displays remaining charge
- Bright LED workspace illumination
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 BH-0 | M18 BH-402C |
|--|---|-------------|
| Tool reception | SDS-Plus | SDS-Plus |
| Blow energy [EPTA][J] | 1.2 | 1.2 |
| Max. drilling wood (mm) | 16 | 16 |
| Max. drilling steel (mm) | 10 | 10 |
| Max. drilling concrete (mm) | 16 | 16 |
| Max. percussion rate (bpm) | 7000 | 7000 |
| Vibration drilling (m/s ²) | 10.3 | 10.3 |
| Weight with battery pack (kg) | - | 2.5 |
| Kit included | No batteries supplied, 2 x 4.0 Ah Battery packs, M12-18 C HD Box, Charger, Kitbox | |
| Article Number | 4933443320 | 4933443334 |

M18

M18-28 CPDEX | M18-28 FUEL™ SDS-PLUS DUST EXTRACTOR

- Designed to collect dust effectively with automatic operation from the tools on/off trigger switch
- HEPA filter: widely regarded as the ultimate filter that traps all sizes of particles with an efficiency rating of 99.75%
- Large dust collection box
- Dust extraction aluminium tube is adjustable according to the size of the drill bit and length 16 mm max and 90 mm depth
- Compatible with M18 CHPX & M28 CHPX
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18-28 CPDEX-0 |
|----------------------------------|---|
| Max. drill bit diameter [mm] | 16 |
| Max. drilling depth [mm] | 90 |
| Max. drill bit length [mm] | 160 |
| Stroke length [mm] | 100 |
| Weight without battery pack (kg) | 1.6 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933446810 |

M18 FUEL M28 FUEL

M18 CDEX | M18 FUEL™ SDS-PLUS DUST EXTRACTOR

- Designed to collect dust effectively with automatic operation from the tools on/off trigger switch
- HEPA Filter: widely regarded as the ultimate filter that traps all sizes of particles with an efficiency rating of 99.75%
- Large dust collection box
- Dust extraction aluminium tube is adjustable according to the size of the drill bit and length 16 mm max and 90 mm depth
- Compatible with M18 CHX
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 CDEX-0 |
|----------------------------------|---|
| Max. drill bit diameter [mm] | 16 |
| Max. drilling depth [mm] | 90 |
| Max. drill bit length [mm] | 160 |
| Stroke length [mm] | 100 |
| Weight without battery pack (kg) | 1.6 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933447450 |

M18 FUEL

M18 ONEPD2

M18 FUEL

M18 FUEL™ ONE-KEY™ PERCUSSION DRILL

- Higher power efficiency under load - outstanding torque of 135 Nm
- Extremely compact design of 175 mm length for access into tight spaces
- Advanced heavy duty chuck providing increased bit grip
- Connect via Bluetooth® with the ONE-KEY™ app
- Customise anti-kickback control via ONE-KEY™ app
- ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention
- Save up to 4 custom settings to the tools memory for fast selection on the jobsite
- Configure to any application choosing optimum tool settings for repeatable precision
- Control speed, torque, start and end speeds, anti-kickback functions and LED
- All metal reversible belt clip to hang your tool quickly and easily
- Flexible battery system: works with all MILWAUKEE® M18™ batteries

ONE-KEY
UNLOCKING THE DIGITAL JOBSITE.



M18 ONEPD2-502X

| | |
|-------------------------------|--|
| No load speed gear 1 (rpm) | 0 - 550 |
| No load speed gear 2 (rpm) | 0 - 2000 |
| Chuck capacity (mm) | 13 |
| Max. drilling wood (mm) | 89 |
| Max. drilling steel (mm) | 16 |
| Max. drilling masonry (mm) | 16 |
| Max. percussion rate (bpm) | 0 - 32,000 |
| Max. torque (Nm) | 135 |
| Weight with battery pack (kg) | 2.2 |
| Kit included | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933464528 |



ONE-KEY™ tool customisation allows the user to optimise their tool for a specific application



Customise anti-kickback control via ONE-KEY™ app



ONE-KEY™ tool tracking & security

M18 FPD2

M18 FUEL

M18 FUEL™ PERCUSSION DRILL

- Higher power efficiency under load - outstanding torque of 135 Nm
- Extremely compact design of 175 mm length for access into tight spaces
- Advanced heavy duty chuck providing increased bit grip
- Brushless POWERSTATE™ motor for heavy application under load
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Battery fuel gauge displays remaining charge
- 40 percent brighter LED workspace illumination - vs previous model
- All metal reversible belt clip to hang your tool quickly and easily
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 FPD2-502X

| | |
|-------------------------------|--|
| No load speed gear 1 (rpm) | 0 - 550 |
| No load speed gear 2 (rpm) | 0 - 2000 |
| Chuck capacity (mm) | 13 |
| Max. drilling wood (mm) | 89 |
| Max. drilling steel (mm) | 16 |
| Max. drilling masonry (mm) | 16 |
| Max. percussion rate (bpm) | 0 - 32,000 |
| Max. torque (Nm) | 135 |
| Weight with battery pack (kg) | 2.2 |
| Kit included | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933464265 |



Extremely compact design of 175 mm length



Advanced heavy duty chuck providing increased bit grip



40 percent brighter LED workspace illumination - vs previous model

M18 BLPD2

M18

M18™ BRUSHLESS PERCUSSION DRILL

- New brushless motor design delivers 40% more torque than previous model - up to 82 Nm
- Compact design (180 mm in length) provides excellent balance and control, ideal for overhead applications or work in tight spaces
- Advanced 13 mm heavy duty metal chuck for quick bit changes and superior bit retention
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Optimised speed for faster drilling & fastening (0 - 550/ 0 - 1800 rpm)
- On board fuel gauge and LED light
- All metal reversible belt clip to hang your tool quickly and easily
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 BLPD2-502X

| | |
|-------------------------------|---|
| No load speed gear 1 (rpm) | 0 - 550 |
| No load speed gear 2 (rpm) | 0 - 1800 |
| Chuck capacity (mm) | 13 |
| Max. drilling wood (mm) | 76 |
| Max. drilling steel (mm) | 13 |
| Max. drilling masonry (mm) | 16 |
| Max. percussion rate (bpm) | 0 - 28,800 |
| Max. torque (Nm) | 82 |
| Weight with battery pack (kg) | 2.1 |
| Kit included | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933464518 |



Measuring only 180 mm in length



Advanced 13 mm heavy duty metal chuck



LED light

M18 FRAD2

NEW M18 FUEL

M18 FUEL™ SUPER HAWG® 2-SPEED RIGHT ANGLE DRILL DRIVER GEN II

- On board fuel gauge and LED light
- POWERSTATE™ brushless motor provides constant power under load to power through 152 mm holes
- REDLINK PLUS™ electronics and REDLITHIUM™-ION battery pack deliver more run time and more work over pack life
- Compact design allows working in confined spaces
- Extremely long run time, up to 100 holes with a 65 mm auger bit into wood
- Mechanical clutch protects the tool in the event of a stall
- All metal gear case and 13 mm keyed chuck for high durability
- Low speed / High speed dial for different applications
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 FRAD2-0

| | |
|---|---|
| No load speed gear 1 (rpm) | 0 - 500 |
| No load speed gear 2 (rpm) | 0 - 1550 |
| Chuck capacity (mm) | 13 |
| Max. drilling wood with auger bit (mm) | 40 |
| Max. drilling wood with selffeed bit (mm) | 117 |
| Max. drilling wood with hole saw (mm) | 159 |
| Max. drilling steel (mm) | 13 |
| Weight with battery pack (kg) | 6.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933471207 |

BIG HAWG™ MULTI MATERIAL SET (10 PC); INCLUDES 6 X HOLESAWS: Ø 35, 44, 51, 57, 68, 76 MM. 1 X ARBOR WITH PILOT DRILL. 2 X PILOT DRILL. 1 X DIAMOND FILE. ALLEN KEY



Article Number **4932464939**



All metal gear case and 13 mm keyed chuck



Low speed / High speed dial



LED light

M18 CRAD | M18 FUEL™ RIGHT ANGLE DRILL

- Delivers corded power and speed (1200 rpm) in wood drilling applications
- Brushless POWERSTATE™ motor for up to 10x longer motor life and up to 25% more power
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- All metal gear case and 13 mm keyed chuck
- Extremely long run time, up to 150 holes with a 22 mm auger bit into 50 x 100 mm wood
- Up to 10% lighter and smaller than leading AC competitive tools
- On board fuel gauge and LED light
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 FUEL

| | M18 CRAD-0 | M18 CRAD-502X |
|---|---|---|
| No load speed (rpm) | 0 - 1200 | 0 - 1200 |
| Chuck capacity (mm) | 13 | 13 |
| Max. drilling wood with auger bit (mm) | 26 | 26 |
| Max. drilling wood with selffeed bit (mm) | 51 | 51 |
| Max. drilling wood with hole saw (mm) | 102 | 102 |
| Max. drilling steel (mm) | 8 | 8 |
| Weight with battery pack (kg) | 4.1 | 4.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933447730 | 4933451351 |

C18 RAD | M18™ COMPACT RIGHT ANGLE DRILL

- Optimised performance: 1500 rpm at 20 Nm
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Perfect speed to power ratio for fast application completion
- 10 mm single sleeve ratcheting chuck provides maximum versatility and grip
- 100 mm compact head designed to fit in the tightest work areas
- Multi-position handle design allows for multiple hand positions and maximum comfort
- 10 + 1 electronic clutch enables complete control while fastening
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- Built in LED light illuminates the work surface
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18

| | C18 RAD-0 |
|-------------------------------|---|
| No load speed (rpm) | 0 - 1500 |
| Chuck capacity (mm) | 10 |
| Max. torque (Nm) | 20 |
| Max. drilling wood (mm) | 28 |
| Max. drilling steel (mm) | 10 |
| Weight with battery pack (kg) | 1.9 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933427189 |

M18 FID2 | M18 FUEL™ 1/4" HEX IMPACT DRIVER

- Higher power efficiency under load - outstanding torque of 226 Nm
- Faster driving speed vs. previous model - up to 3600 rpm and 4300 ipm
- Extremely compact design - total length of just 117 mm for access into tight spaces
- DRIVE CONTROL allows the user to shift into four different speed and torque settings to maximise application versatility
- Mode 1 for precision work
- Mode 2 helps prevent damage to fasteners and material
- Mode 3 delivers maximum performance for the toughest applications
- Mode 4 is the optimum between precision work and maximum performance and automatically adjusts speed, impacts and torque
- Brushless POWERSTATE™ motor for heavy application under load
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- 1/4" Hex chuck for quick and easy bit change
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 FUEL

| | M18 FID2-0X | M18 FID2-502X |
|-------------------------------|--|---|
| No load speed (rpm) | 1900/2800/3600/0-3600 | 1900/2800/3600/0-3600 |
| Impact rate (ipm) | 1200/3400/4300/0-4300 | 1200/3400/4300/0-4300 |
| Max. fastening torque (Nm) | 226 | 226 |
| Max. torque (Nm) | 119/176/226/0-226 | 119/176/226/0-226 |
| Tool reception | 1/4" Hex | 1/4" Hex |
| Weight with battery pack (kg) | - | 1.7 |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933464087 | 4933464089 |

M18 ONEID2

M18 FUEL™ ONE-KEY™ 1/4" HEX IMPACT DRIVER

- Higher power efficiency under load - outstanding torque of 226 Nm
- Faster driving speed vs. previous model - up to 3600 rpm and 4300 ipm
- Extremely compact design - total length of just 117 mm for access into tight spaces
- Connect via Bluetooth® with the ONE-KEY™ app
- ONE-KEY™ app provides inventory function for total management of your complete tool/equipment fleet
- Save up to 4 custom settings to the tools memory for fast selection on the jobsite
- Configure to any application choosing optimum tool settings for repeatable precision
- Control speed, torque, start and end speeds and LED
- Flexible battery system: works with all MILWAUKEE® M18™ batteries

M18 FUEL



| | M18 ONEID2-0X | M18 ONEID2-502X |
|-------------------------------|--|---|
| No load speed (rpm) | 1900/2800/3600/0-3600 | 1900/2800/3600/0-3600 |
| Impact rate (ipm) | 1200/3400/4300/0-4300 | 1200/3400/4300/0-4300 |
| Max. fastening torque (Nm) | 226 | 226 |
| Max. torque (Nm) | 119/176/226/0-226 | 119/176/226/0-226 |
| Tool reception | 1/4" Hex | 1/4" Hex |
| Weight with battery pack (kg) | - | 1.7 |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933464090 | 4933464092 |



Complete tool customisation via ONE-KEY™ app



Save profiles for application specific repeatable precision



Inventory functionality for total fleet management

M18 FQID

M18 FUEL™ SURGE™ 1/4" HEX HYDRAULIC IMPACT DRIVER

- The M18 FUEL™ SURGE™ 1/4" Hex hydraulic driver is Milwaukee Tool's quietest impact driver
- FLUID-DRIVE™ hydraulic powertrain reduces metal on metal contact within the tool, delivering quieter operation, smoother performance and increased durability over a standard impact
- Delivers same performance in wood fastening as standard brushless impact drivers
- POWERSTATE™ brushless motor delivers up to 0 - 3.000 rpm with constant power output to drive screws faster
- REDLINK PLUS™ intelligence system delivers the most advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- 4-Mode DRIVE CONTROL allows the user to shift into four different speed and torque settings to maximise application versatility
- Self-tapping screw mode is designed to reduce walking when starting self-tapping screws as well as reduce overdriving, breaking and stripping out screws

| | M18 FQID-0 | M18 FQID-502X |
|-------------------------------|--|---|
| No load speed (rpm) | 900/2100/3000/0-3000 | 900/2100/3000/0-3000 |
| Impact rate (ipm) | 1800/2900/4000/0-4000 | 1800/2900/4000/0-4000 |
| Max. torque (Nm) | 50 | 50 |
| Tool reception | 1/4" Hex | 1/4" Hex |
| Max. bolt diameter | M14 | M14 |
| Weight with battery pack (kg) | - | 1.7 |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933451792 | 4933451791 |



M18 FUEL



FLUID-DRIVE™ hydraulic powertrain reduces metal on metal contact within the tool, delivering quieter operation, smoother performance



4 mode DRIVE CONTROL



1/4" Hex chuck for quick and easy bit change

M18 BLID2 | M18™ BRUSHLESS 1/4" HEX IMPACT DRIVER

- Brushless impact driver measures only 130 mm in length making it ideal for working within confined spaces
- Brushless motor technology delivers 180 Nm of torque, 3400 rpm and 4200 ipm
- 3-Mode DRIVE CONTROL allows the user to shift into three different speed and torque settings to maximise application versatility
- One-handed bit insert with retention lock, for faster, easier changing of bits
- Heavy duty full metal gearbox and gears for superior durability and maximum torque
- On board fuel gauge and LED light
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- All metal reversible belt clip to hang your tool quickly and easily
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 BLID2-0X | M18 BLID2-502X |
|-------------------------------|--|---|
| No load speed (rpm) | 1700/2600/0-3400 | 1700/2600/0-3400 |
| Impact rate (ipm) | 1500/3400/0-4200 | 1500/3400/0-4200 |
| Max. torque (Nm) | 180 | 180 |
| Tool reception | 1/4" Hex | 1/4" Hex |
| Weight with battery pack (kg) | - | 1.7 |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933464519 | 4933464521 |

M18

M18 BRAID | M18™ RIGHT ANGLE IMPACT DRIVER

- Compact right angle impact driver measures 307 mm in length making it ideal for working within confined spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Full metal gearbox and gears for superior durability and maximum torque
- Compact 53 mm head design
- Multi-handle design for multiple hand positions and maximum comfort
- 1/4" Hex chuck for quick easy one handed bit change
- 2 speed settings for wider range of applications
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18

| | M18 BRAID-0 |
|-------------------------------|---|
| No load speed (rpm) | 0 - 1500 / 0 - 2250 |
| Impact rate (ipm) | 0 - 2400 / 0 - 3400 |
| Tool reception | 1/4" Hex |
| Max. torque (Nm) | 41 / 81 |
| Weight with battery pack (kg) | 1.8 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933447891 |

M18 FSGC | M18 FUEL™ SCREW GUN WITH A COLLATED ATTACHMENT

- Brushless POWERSTATE™ motor for up to 10x longer motor life and up to 60% more power
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- AUTO-START™ technology: When activated the power only engages when the screw gun is pushed into the material during application, delivering outstanding run time
- Quick release 1/4" Hex chuck allows for easy bit change
- Fine adjustment nose cone for setting desired countersink levels in single screw applications
- Removable collated attachment allows the user to use the gun as a stand alone screwdriver or a collated screw gun
- Intuitive design of collated attachment to allow for easy cleaning of drywall dust
- Reinforced collated attachment to protect against dropping of tool



M18 FUEL

| | M18 FSGC-202X |
|----------------------------------|---|
| No load speed (rpm) | 0 - 4500 |
| Wood screws to (mm) | 6 |
| Max. static stalling torque (Nm) | 13 |
| Tool reception | 1/4" Hex |
| Weight with battery pack (kg) | 2.0 |
| Kit included | 2 x 2.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933459200 |

M18 FSG | M18 FUEL™ SCREW GUN

- Brushless POWERSTATE™ motor for up to 10x longer motor life and up to 60% more power
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- AUTO-START™ technology: When activated the power only engages when the screw gun is pushed into the material during application, delivering outstanding run time
- Quick release 1/4" Hex chuck allows for easy bit change
- Fine adjustment nose cone for setting desired countersink levels in single screw applications
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- Brightest LED workspace illumination
- All metal reversible belt clip to hang your tool quickly and easily
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 FUEL

| | M18 FSG-0X |
|----------------------------------|--|
| No load speed (rpm) | 0 - 4500 |
| Wood screws to (mm) | 6 |
| Max. static stalling torque (Nm) | 13 |
| Tool reception | 1/4" Hex |
| Weight with battery pack (kg) | 1.6 |
| Kit included | No batteries supplied, No charger supplied, HD Box |
| Article Number | 4933459201 |

| COLLATED ATTACHMENT | |
|---------------------|------------|
| Article Number | 4933459202 |

M18 ONEFHIWF1

NEW M18 FUEL

M18 FUEL™ ONE-KEY™ 1" HIGH TORQUE IMPACT WRENCH WITH FRICTION RING

- World's first cordless 18V 1" high torque impact wrench replacing AC, petrol and pneumatic wrenches
- The M18 FUEL™ high torque impact wrench delivers 2033 Nm of fastening torque at half the size and weight of AC, petrol or pneumatic solutions
- Delivers up to 2400 Nm of nut-busting torque that enables bolts up M42 to open
- The 4 -Mode DRIVE CONTROL allows the user to shift into four different speed and torque settings to maximise application versatility
- The integrated blow counting sensor enhances the consistent repeatability of the chosen torque setting
- ONE-KEY™ tool control enables wireless tool customisation for increased productivity and consistent results
- ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| M18 ONEFHIWF1-802X | |
|-------------------------------|---|
| No load speed (rpm) | 0-950/0-1080/0-1370/0-1670 |
| Impact rate (ipm) | 1350/1650/2100/0-2500 |
| Tool reception | 1" square |
| Max. fastening torque (Nm) | 530/1020/1800/2033 |
| Nut_busting torque (Nm) | 2400 |
| Max. bolt diameter | M42 |
| Weight with battery pack (kg) | 5.9 |
| Kit included | 2 x 8.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933459734 |



1" friction ring reception and additional side handle



ONE-KEY™ tool customisation allows the user to optimise their tool for a specific application



Metal hanging hook



M18 ONEFHIWF34 | M18 FUEL™ ONE-KEY™ 3/4" HIGH TORQUE IMPACT WRENCH WITH FRICTION RING

- The M18 FUEL™ high torque impact wrench with ONE-KEY™ technology delivers 1627 Nm of fastening torque in a compact size of 213 mm, which gives more access in tight spaces
- The 4 -Mode DRIVE CONTROL allows the user to shift into four different speed and torque settings to maximise application versatility
- Mode 4 bolt removal, provides a maximum nut-busting torque of 2034 Nm then shifts to 750 rpm for outstanding control when removing fasteners
- The integrated blow counting sensor enhances the consistent repeatability of the chosen torque setting
- ONE-KEY™ tool customisation allows the user to optimise their tool for specific applications
- ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention
- 3/4" friction ring reception
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| M18 ONEFHIWF34-502X | |
|-------------------------------|---|
| No load speed (rpm) | 0-800/0-1300/0-1800/0-1800 |
| Impact rate (ipm) | 0-850/0-1850/0-2400/0-2400 |
| Tool reception | 3/4" square |
| Max. torque (Nm) | 702/1138/1627/1627 |
| Nut_busting torque (Nm) | 2034 |
| Max. bolt diameter | M33 |
| Weight with battery pack (kg) | 3.5 |
| Kit included | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933459731 |

27 MM 3/4" IMPACT SOCKET

| | |
|----------------|------------|
| Article Number | 4932471647 |
|----------------|------------|



M18 ONEFHIWF12 | M18 FUEL™ ONE-KEY™ 1/2" HIGH TORQUE IMPACT WRENCH WITH FRICTION RING

- The M18 FUEL™ high torque impact wrench with ONE-KEY™ technology delivers 1356 Nm of fastening torque in a compact size of 213 mm, which gives more access in tight spaces
- The 4 -Mode DRIVE CONTROL allows the user to shift into four different speed and torque settings to maximise application versatility
- Mode 4 bolt removal, provides a maximum nut-busting torque of 1898 Nm then shifts to 750 rpm for outstanding control when removing fasteners
- The integrated blow counting sensor enhances the consistent repeatability of the chosen torque setting
- ONE-KEY™ tool customisation allows the user to optimise their tool for specific applications
- ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention
- 1/2" friction ring reception
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| M18 ONEFHIWF12-502X | |
|-------------------------------|---|
| No load speed (rpm) | 0-550/0-1400/0-1750/0-1750 |
| Impact rate (ipm) | 0-950/0-1750/0-2100/0-2100 |
| Tool reception | 1/2" square |
| Max. torque (Nm) | 130/400/1356/1356 |
| Nut_busting torque (Nm) | 1898 |
| Weight with battery pack (kg) | 3.3 |
| Kit included | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933459728 |

1/2" SHOCKWAVE™ IMPACT DUTY SOCKET SET (10 PC)

| | |
|----------------|------------|
| Article Number | 4932352861 |
|----------------|------------|



M18 FMTIWF12 | M18 FUEL™ 1/2" MID TORQUE IMPACT WRENCH WITH FRICTION RING

- The M18 FUEL™ mid torque impact wrench delivers 610 Nm in a compact size of only 170 mm
- 3-Mode DRIVE CONTROL allows the user to shift into 3 different speed and torque settings to maximise application versatility
- Brushless POWERSTATE™ motor for longer motor life and more power
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics & fade-free performance to deliver more run time and more work over pack life
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- 1/2" square friction ring
- On board fuel gauge and LED light
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| M18 FMTIWF12-502X | |
|-------------------------------|---|
| No load speed (rpm) | 510/2100/2400 |
| Impact rate (ipm) | 420/2700/3000 |
| Tool reception | 1/2" square |
| Max. torque (Nm) | 130/550/610 |
| Weight with battery pack (kg) | 2.4 |
| Kit included | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933459186 |

1/2" SHOCKWAVE™ IMPACT DUTY SOCKET SET (10 PC)

| | |
|----------------|------------|
| Article Number | 4932352861 |
|----------------|------------|



M18 ONEIWF12 | M18 FUEL™ ONE-KEY™ 1/2" IMPACT WRENCH WITH FRICTION RING

- M18 FIWF12 but with ONE-KEY™ technology
- Connect via Bluetooth® with the ONE-KEY™ app
- Complete tool customisation via ONE-KEY™ app to tune the tool to your needs
- Control speed, torque, start - end speeds and LED light
- Configure to any application choosing optimum tool settings for repeatable precision
- Program / save profiles for unmatched control
- Select from a range of application profiles or quickly create your own for perfect results on every trigger pull
- Save up to 4 custom settings to the tools memory for fast selection on the jobsite
- ONE-KEY™ app also provides inventory function for total management of your complete tool / equipment fleet
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 FUEL

| | M18 ONEIWF12-0 | M18 ONEIWF12-502X |
|-------------------------------|--|---|
| No load speed (rpm) | 900/1400/1900/2500 | 900/1400/1900/2500 |
| Impact rate (ipm) | 1300/2100/2550/3200 | 1300/2100/2550/3200 |
| Tool reception | 1/2" square | 1/2" square |
| Max. torque (Nm) | 40/120/220/300 | 40/120/220/300 |
| Weight with battery pack (kg) | - | 1.8 |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933451153 | 4933451375 |

M18 BIW12 | M18™ 1/2" IMPACT WRENCH

- Compact 1/2" impact wrench measures 155 mm in length making it ideal for working within confined spaces
- High performance 4-pole motor delivers maximum power whilst maximising the power to weight ratio
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Heavy duty full metal gearbox and gears for superior durability and maximum torque
- 1/2" square drive for use with universal sockets
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 BIW12-0 | M18 BIW12-202C |
|-------------------------------|---|--|
| No load speed (rpm) | 0 - 2450 | 0 - 2450 |
| Tool reception | 1/2" square | 1/2" square |
| Impact rate (ipm) | 0 - 3350 | 0 - 3350 |
| Max. torque (Nm) | 240 | 240 |
| Weight with battery pack (kg) | - | 1.6 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 2.0 Ah Battery packs, M12-18 C Charger, Kitbox |
| Article Number | 4933443590 | 4933443583 |

M18 ONEIWP12 | M18 FUEL™ ONE-KEY™ 1/2" IMPACT WRENCH WITH PIN DETENT

- M18 FIWP12 but with ONE-KEY™ technology
- Connect via Bluetooth® with the ONE-KEY™ app
- Complete tool customisation via ONE-KEY™ app to tune the tool to your needs
- Control speed, torque, start and end speeds and LED
- Configure to any application choosing optimum tool settings for repeatable precision
- Program/save profiles for unmatched control
- Select from a range of application profiles or quickly create your own for perfect results on every trigger pull
- Save up to 4 custom settings to the tools memory for fast selection on the jobsite
- ONE-KEY™ app also provides inventory function for total management of your complete tool/equipment fleet
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 FUEL

| | M18 ONEIWP12-0 |
|-------------------------------|--|
| No load speed (rpm) | 900/1400/1900/2500 |
| Impact rate (ipm) | 1300/2100/2550/3200 |
| Tool reception | 1/2" square |
| Max. torque (Nm) | 40/120/220/300 |
| Weight with battery pack (kg) | - |
| Kit included | No batteries supplied, No charger supplied, HD Box |
| Article Number | 4933451152 |

M18 BIW38 | M18™ 3/8" IMPACT WRENCH

- Compact 3/8" impact wrench measures 152 mm in length making it ideal for working within confined spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Heavy duty full metal gearbox and gears for superior durability and maximum torque
- 3/8" square drive for use with universal sockets
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 BIW38-0 | M18 BIW38-202C |
|-------------------------------|---|--|
| No load speed (rpm) | 0 - 2450 | 0 - 2450 |
| Tool reception | 3/8" square | 3/8" square |
| Impact rate (ipm) | 0 - 3350 | 0 - 3350 |
| Max. torque (Nm) | 210 | 210 |
| Weight with battery pack (kg) | 1.9 | 1.6 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 2.0 Ah Battery packs, M12-18 C Charger, Kitbox |
| Article Number | 4933443600 | 4933446201 |

M18 ONEIWF38 | ONE-KEY™ FUEL™ 3/8" IMPACT WRENCH WITH FRICTION RING

- M18 FIWF but with ONE-KEY™ technology
- Connect via Bluetooth™ with the Milwaukee® ONE-KEY™ app
- Complete tool customisation via ONE-KEY™ app to tune the tool to your needs
- Control speed, torque, start and end speeds and LED
- Configure to any application choosing optimum tool settings for repeatable precision
- Program/ save profiles for unmatched control
- Select from a range of application profiles or quickly create your own for perfect results on every trigger pull
- Save up to 4 custom settings to the tools memory for fast selection on the jobsite
- ONE-KEY™ app also provides inventory function for total management of your complete tool/ equipment fleet



M18 FUEL

| | M18 ONEIWF38-0 | M18 ONEIWF38-502X |
|-------------------------------|---|---|
| No load speed (rpm) | 900/1400/1900/2500 | 900/1400/1900/2500 |
| Impact rate (ipm) | 1300/2100/2550/3200 | 1300/2100/2550/3200 |
| Tool reception | 3/8" square | 3/8" square |
| Max. fastening torque [Nm] | 284 | 284 |
| Max. torque (Nm) | 40/100/220/284 | 40/100/220/284 |
| Weight with battery pack (kg) | 1.8 | 1.8 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933451154 | 4933459400 |

M18 BRAIW | M18™ 3/8" RIGHT ANGLE IMPACT WRENCH

- Compact right angle impact wrench measures 307 mm in length making it ideal for working within confined spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Full metal gearbox and gears for superior durability and maximum torque
- Compact 53 mm head design
- Multi-handle design for multiple hand positions and maximum comfort
- 3/8" square drive for use with universal sockets
- 2 speed settings for wider range of applications
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 BRAIW-0 |
|-------------------------------|---|
| No load speed (rpm) | 0 - 1500 / 0 - 2250 |
| Tool reception | 3/8" square |
| Impact rate (ipm) | 0 - 2400 / 0 - 3400 |
| Max. torque (Nm) | 40 / 76 |
| Weight with battery pack (kg) | 1.8 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933447899 |

M18 FPM | M18 FUEL™ PADDLE MIXER

- Thanks to the POWERSTATE™ brushless motor it has the power to mix heavy compounds, such as concrete and mortar
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Ultimate speed control: 3 different ways of controlling speed for clean and consistent mixes (8-speed setting dial, variable speed trigger and a lock on button)
- 180° adjustable handle with 16 adjustable settings for user to optimise the handle position based on preference and comfort
- M14 tool reception
- On board fuel gauge and LED light
- Flexible battery system: works with all MILWAUKEE® M18™ batteries
- Kitted with 150 mm paddle extension (M14)



M18 FUEL

| M18 FPM-0X | |
|---|--|
| No load speed (rpm) | 0 - 550 |
| Tool reception | M14 |
| Max. stirrer paddle diameter (mm) | 120 |
| Max. recommended mixing capacities (kg/l) | 20 |
| Weight with battery pack (kg) | 3.0 |
| Kit included | No batteries supplied, No charger supplied, HD Box |
| Article Number | 4933459719 |

M18 FMDP | M18 FUEL™ MAGNETIC DRILLING PRESS WITH PERMANENT MAGNET

M18 FUEL

- Brushless POWERSTATE™ motor provides corded drilling performance with strongest magnet holding force on 1/4" steel and 40 x 18 mm holes per battery charge
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- AUTOSTOP™ lift-off detection: Detects excess rotation and automatically cuts power to the drill for best user protection
- Self-powered permanent magnet with 8,890 N of holding force prevents accidental magnet deactivation for improved user protection and easy alignment
- 2 speed gear box for optimised drilling speed with 400 and 690 rpm's when using annual cutters or twist drill bits
- Maximum drilling capacity of 38 mm with use of annual cutters and 13 mm straight shank twist drill bits
- Keyless 19 mm Weldon reception for fast and easy accessory change



| M18 FMDP-502C | |
|---|---|
| No load speed (rpm) | 400 / 690 |
| Max. diameter broaching capacity (mm) | 38 |
| Max. depth broaching capacity (mm) | 50 |
| Max. drilling solid bit (mm) | 13 |
| Magn. holding power (at drill point pressure) (N) | 8890 |
| Stroke length (mm) | 146 |
| Weight with battery pack (kg) | 13.0 |
| Kit included | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, Kitbox |
| Article Number | 4933451013 |

M18 FCOS230

M18 FUEL™ CUT OFF SAW

- The world's first 18V 230 mm battery powered cut off saw, delivers the power to cut reinforced concrete, whilst being 50% lighter than other petrol comparisons
- Starts up instantly, eliminates the need to mix petrol and oil, and avoids petrol engine maintenance
- Can be used indoors due to zero fume emissions
- Features RAPIDSTOP™ blade brake and load indicator light, as well as lowest vibrations at 1.81 m/s²
- 85 mm cutting depth for class leading performance
- Dual sided water supply for optimised dust management
- Next generation POWERSTATE™ brushless motor, REDLINK PLUS™ electronics and REDLITHIUM™-ION HIGH OUTPUT™ 12.0 Ah battery pack deliver superior performance, durability and run time in high demand applications
- ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention
- Compatible with the M18™ SWITCH TANK™ interchangeable sprayer and water supply system



Features RAPIDSTOP™ blade brake



Dual sided water supply for optimised dust management



Compatible with the M18™ SWITCH TANK™ interchangeable sprayer and water supply system

DUH 230 MM SUITABLE FOR USE WITH THE M18 FUEL™ CUT OFF SAW

Article Number **4932399542**



M18 FUEL

NEW

M18 FLAG230XPDB

M18 FUEL™ 230 MM LARGE BRAKING GRINDER WITH PADDLE SWITCH

M18 FUEL

- The world's first single 18V battery operated large angle grinder that delivers the power to grind, lighter than corded tools and makes up to 68 cuts per charge in 42 mm stainless steel pipe
- Next generation POWERSTATE™ brushless motor, REDLINK PLUS™ electronics and REDLITHIUM™-ION HIGH OUTPUT™ 12.0 Ah battery pack deliver superior performance, durability and run time in high demand applications
- Disc brake slows the disc down faster for improved user protection
- Non-lockable safety paddle switch with line-lock-out function to prevent automatic start up
- Keyless guard for great cutting capacity and fast guard adjustment without using a key
- FIXTEC™ nut for tool-free disc change
- Anti-vibration side handle for lower vibration
- Removable dust screen to prevent debris entrance, prolonging motor life



FIXTEC™ nut for tool-free disc change



Removable dust screen to prevent debris entrance



Non-lockable safety paddle switch

| | M18 FLAG230XPDB-0C | M18 FLAG230XPDB-121C |
|-------------------------------|--|---|
| No load speed (rpm) | 6600 | 6600 |
| Disc diameter (mm) | 230 | 230 |
| Cutting depth (mm) | 65 | 65 |
| Spindle size | M14 | M14 |
| Weight with battery pack (kg) | - | 5.3 |
| Switch type | Paddle switch | Paddle switch |
| FIXTEC™ flange nut | Yes | Yes |
| Anti kickback protection | Yes | Yes |
| Line lock out function | Yes | Yes |
| Kit included | No batteries supplied, No charger supplied, Kitbox | 1 x 12.0 Ah Battery pack, M12-18 FC Charger, Kitbox |
| Article Number | 4933464114 | 4933464116 |

DUST GUARD FOR CUTTING.

Article Number **4932459341**



M18 FHSAG125XPDB

NEW M18 FUEL

M18 FUEL™ HIGH PERFORMANCE 125 MM BRAKING GRINDER WITH PADDLE SWITCH

- M18™ HIGH OUTPUT™ 125 mm small angle grinder that delivers the power to grind and makes up to 145 cuts per charge (5.5 Ah) in 2" electrical pipe
- RAPIDSTOP™ for fastest disc brake in less than 2.5 seconds and best user protection
- Next generation POWERSTATE™ brushless motor, REDLINK PLUS™ electronics and REDLITHIUM™-ION HIGH OUTPUT™ 12.0 Ah battery pack deliver superior performance, durability and run time in high demand applications
- Non-lockable safety paddle switch with line-lock-out function to prevent automatic start up
- Anti-vibration side handle for lower vibration
- FIXTEC™ nut for tool-free disc change
- Removable dust screen to prevent debris entrance, prolonging motor life
- 125 mm keyless guard for great cutting capacity and fast guard adjustment without using a key



RAPIDSTOP™ for fastest disc brake



FIXTEC™ nut for tool-free disc change



Removable dust screen



DUST GUARD FOR SURFACE CONDITIONING Ø125 MM AG(V) 12, AGV 15 SERIES AND FUEL™ GRINDERS.



Article Number **4932430468**

| M18 FHSAG125XPDB-0X | |
|-------------------------------|--|
| No load speed (rpm) | 9000 |
| Disc diameter (mm) | 125 |
| Cutting depth (mm) | 33 |
| Spindle size | M14 |
| Weight with battery pack (kg) | 3.4 |
| Brake | Yes |
| Switch type | Paddle (Deadman) switch |
| FIXTEC™ flange nut | Yes |
| Line lock out function | Yes |
| Kit included | No batteries supplied, No charger supplied, HD Box |
| Article Number | 4933471078 |

M18 CAG115XPDB | M18 FUEL™ 115 MM BRAKING GRINDER WITH PADDLE SWITCH

M18 FUEL

- Brushless POWERSTATE™ motor with the power to grind and up to 10x more tool life
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- RAPIDSTOP™ for fastest disc brake in less than 2 seconds and best user protection
- Non-lockable safety paddle switch with line-lock-out function to prevent automatic start up
- Premium gearing system - same system as used at high performance corded grinders
- Slim handle design with paddle switch
- Removable dust screen to prevent debris entrance, prolonging motor life
- 115 mm keyless guard - great cutting capacity and fast guard adjustment without using a spanner
- FIXTEC™ nut for tool-free disc change
- Anti-vibration side handle for lower vibration



| | M18 CAG115XPDB-0 | M18 CAG115XPDB-502X |
|-------------------------------|--|---|
| No load speed (rpm) | 8500 | 8500 |
| Disc diameter (mm) | 115 | 115 |
| Cutting depth (mm) | 28 | 28 |
| Spindle size | M 14 | M 14 |
| Weight with battery pack (kg) | - | 2.7 |
| Switch type | Deadman switch | Paddle (Deadman) switch |
| Braking time [s] | < 2 | < 2 |
| FIXTEC™ flange nut | Yes | Yes |
| Line lock out function | Yes | Yes |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933451007 | 4933451542 |

HD18 AG-115 | M18™ 115 MM ANGLE GRINDER WITH PADDLE SWITCH

M18

- High performance 4-pole motor delivers maximum power whilst (optimising) maximising the power to weight ratio
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Full metal gear case delivers heavy duty durability
- Reduced height of gear box and slim girth design deliver optimum ergonomics
- Non-lockable switch for best user protection and preventing automatic start up
- Burst resistant and tool-free safety guard for best user protection and fast adjustment
- Multi position side handle for ease of use
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | HD18 AG-115-0 | HD18 AG-115-402C |
|-------------------------------|---|--|
| No load speed (rpm) | 9000 | 9000 |
| Disc diameter (mm) | 115 | 115 |
| Cutting depth (mm) | 28 | 28 |
| Spindle size | M 14 | M 14 |
| Weight with battery pack (kg) | - | 2.4 |
| Brake | No | No |
| Switch type | Paddle (Deadman) switch | Paddle (Deadman) switch |
| FIXTEC™ flange nut | No | No |
| Line lock out function | No | No |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 4.0 Ah Battery packs, M12-18 C Charger, Kitbox |
| Article Number | 4933411210 | 4933441303 |

M18 BMS12 | M18™ METAL SHEAR

M18

- Accurate cuts with maximum cutting depth of 1.2 mm in steel
- Unique 360° tool-free rotating head with 12 locking positions to access tight spaces and increasing user comfort
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- In-Line wrist design for increased control during cutting
- Variable speed trigger for extra control during cutting
- Belt clip for secure mobility
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| M18 BMS12-0 | |
|--------------------------------------|---|
| No load speed (rpm) | 0 - 2500 |
| Max. cutting capacity steel (mm) | 1.2 |
| Max. cutting capacity aluminium (mm) | 2.0 |
| Minimum cutting radius [mm] | 180 |
| Weight with battery pack (kg) | 2.3 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933447925 |

M18 BMS20 | M18™ METAL SHEAR

M18

- Accurate cuts with maximum cutting depth of 2.0 mm in steel
- Unique 360° tool-free rotating head with 12 locking positions to access tight spaces and increasing user comfort
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- In-Line wrist design for increased control during cutting
- Variable speed trigger for extra control during cutting
- Belt clip for secure mobility
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| M18 BMS20-0 | |
|--------------------------------------|---|
| No load speed (rpm) | 0 - 2500 |
| Max. cutting capacity steel (mm) | 2.0 |
| Max. cutting capacity aluminium (mm) | 3.2 |
| Minimum cutting radius [mm] | 180 |
| Weight with battery pack (kg) | 2.6 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933447935 |

M18 BLTRC | M18™ BRUSHLESS THREADED ROD CUTTER

- M18™ brushless threaded rod cutter delivers a fast and effortless solution for cutting threaded rods
- Integrated brushless motor provides the user the power to cut through M6, M8, M10 and M12 mild steel or M6, M8 and M10 stainless steel threaded rod, with a run time of up to 300 cuts with a 2.0 Ah battery
- Included cutting dies cover the most common sizes of threaded rod: M6, M8, M10 and M12, which can be changed by rotating the dies
- Optimised tool handling allows better visibility, guarantees easy alignment and precise cut accuracy
- Intelligent design delivers optimum balance for overhead cutting, as well as great stability for pre-fab applications
- Fully balanced tool, with a centred grip design, provide a perfect one handed operation
- Automatically opens dies after a cut is complete to allow the user to do fast repetitive cuts
- The tool provides the ability to cut short pieces with a minimum length of 3.8 cm
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability



NEW M18

| | M18 BLTRC-0X | M18 BLTRC-522X |
|-------------------------------|--|--|
| Weight with battery pack (kg) | - | 3.9 |
| Standard equipment | M6, M8, M10 & M12 cutting dies | M6, M8, M10 & M12 cutting dies |
| Kit included | No batteries supplied, No charger supplied, HD Box | 1 x 5.0/1 x 2.0 Ah Battery packs, M12-18 C Charger, HD Box |
| Article Number | 4933471150 | 4933471152 |

M18 CBS125 | M18 FUEL™ DEEP CUT BAND SAW

- Brushless POWERSTATE™ motor provides corded cutting performance with up to 10x more motor life and up to 2x more run time compared to other cordless solutions
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Largest cutting capacity up to 125 x 125 mm material diameter
- 5 step variable speed selection from 0 - 116 m/min
- Tool-free blade locking mechanism for quick and easy saw blade changes
- Solid metal rafter hook for quick and easy jobsite storage
- Slim full metal motor housing design and LED work surface illumination for best cut visibility
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 FUEL

| | M18 CBS125-0 | M18 CBS125-502C |
|-----------------------------------|---|---|
| No load speed [m/min] | 0 - 116 | 0 - 116 |
| Cutting capacity rect. stock (mm) | 125 x 125 | 125 x 125 |
| Blade length (mm) | 1139.83 | 1139.83 |
| Weight with battery pack (kg) | - | 7.3 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, Kitbox |
| Article Number | 4933447150 | 4933448198 |

BANDSAW COVER FOR M18 CBS125 & BS 125

Article Number 4932471459



HD18 BS | M18™ METAL BANDSAW

- 4.8 kg compact light weight design for cutting overhead and in tight places
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- 85 mm cut capacity – cuts most common materials
- Tool-free adjustable material shoe – quickly adjusts the shoe and allows flush cuts when working with installed materials against walls and ceilings
- Blade ejection system – quickly change the blade by moving the material guide into the up position and depressing the blade ejection button
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18

| | HD18 BS-0 | HD18 BS-402C |
|-----------------------------------|---|--|
| No load speed (rpm) | 146 | 146 |
| Cutting capacity rect. stock (mm) | 85 x 85 | 85 x 85 |
| Blade length (mm) | 898.52 | 898.52 |
| Weight with battery pack (kg) | - | 4.8 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 4.0 Ah Battery packs, M12-18 C Charger, Kitbox |
| Article Number | 4933419122 | 4933448762 |

BANDSAW COVER FOR HD18 BS

Article Number 4932471458



M18 FAP | M18 FUEL™ POLISHER

- Brushless POWERSTATE™ motor to deliver the ultimate mobility in car polishing
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- World's first cordless polisher with 8 position variable speed selection ranging from 360 - 2200 rpm
- Outstanding run time to polish one full size car per battery charge
- Constant speed electronics with soft start for smooth start up
- Maximum polishing accessory diameter of 180 mm
- Removable dust screen to prevent debris ingress, prolonging motor life
- Rubber overmold gear case for increased comfort, especially when working with the tool vertically
- Lock-on function provides more comfortable use when polishing for longer periods
- 3 position bale handle for improved tool control
- Line-lock-out function to prevent automatic start up after battery change



M18 FUEL

| | M18 FAP180-0 | M18 FAP180-502X |
|-------------------------------|---|--|
| No load speed (rpm) | 360 - 2200 | 360 - 2200 |
| Disc diameter (mm) | 180 | 180 |
| Spindle size | M 14 | M 14 |
| Weight with battery pack (kg) | - | 2.2 |
| Variable speed | Yes | Yes |
| Line lock out function | Yes | Yes |
| Soft start function | Yes | Yes |
| Standard equipment | Polishing backing pad, dust screen, bale handle, AVS side handle | Polishing backing pad, polishing sponge white, polishing sponge orange, lambswool, dust screen, bale handle, AVS side handle |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933451549 | 4933451551 |

M18 FDG | M18 FUEL™ DIE GRINDER

- Brushless POWERSTATE™ motor with corded performance, up to 20 min of grinding on a 5.0 Ah battery and up to 10x more tool life
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Universal reception to fit both, 6 and 8 mm accessories
- Slim handle design
- Removable dust screen to prevent debris entrance, prolonging motor life
- Rubber front provides most comfortable handling
- Line-lock out function to prevent automatic start up
- Fuel gauge displays remaining charge
- Flexible battery system: works with all MILWAUKEE® M18™ batteries
- Supplied with 6 mm & 8 mm collet, 15 mm & 17 mm open ended spanner, 2 x dust screens



M18 FUEL

| | M18 FDG-0 | M18 FDG-502X |
|---|--|---|
| No load speed (rpm) | 27,000 | 27,000 |
| Collet capacity (mm) | 6 / 8 | 6 / 8 |
| Max. grinding accessories diameter [mm] | 50 | 50 |
| Weight with battery pack (kg) | - | 2.1 |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933459106 | 4933459108 |

M18 FMCS | M18 FUEL™ METAL SAW

- Brushless POWERSTATE™ motor for fast cutting, longest tool life and up to 370 cuts in 3/4" EMT
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Cold cuts - reduces sparks for increased jobsite safety
- Tool-free depth adjustment, quickly and easily adjusts cutting depth from 0 to 57 mm
- Compact and light weight design for most comfortable use
- Integrated rafter hook for easy storage between uses
- On board allen key storage for easy access and preventing losing the key
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- Flexible battery system: works with all MILWAUKEE® M18™ batteries
- Supplied with 150 mm 34 teeth metal cutting blade



M18 FUEL

| | M18 FMCS-0 | M18 FMCS-502X |
|-------------------------------|---|---|
| No load speed (rpm) | 3900 | 3900 |
| Blade diameter (mm) | 150 | 150 |
| Bore size (mm) | 20 | 20 |
| Cutting depth (mm) | 57 | 57 |
| Weight with battery pack (kg) | - | 2.8 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933459191 | 4933459194 |

METAL CUTTING CIRCULAR SAW BLADE FOR 18 V FUEL™ METAL SAW

Article Number 48404080



M18 BMT | M18™ MULTI-TOOL

- Up to 50% faster and versatile cordless solution for cutting and removal applications with corded performance
- REDLINK™ overload protection and constant speed electronics in tool deliver best in class durability and performance
- 12 variable speed settings from 12,000 - 18,000 orbits per minute and 3.4° oscillation movement allows quick completion of professional applications into materials such as metal, wood and plastic
- Productivity enhancing FIXTEC™ tool free blade change with universal blade change adaptor included to accept all competitor blades
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Unique cutting depth stop adaptor to prevent over-cutting in material
- Unique dust extraction kit to keep the work space dust-free when connected to an AC or DC extraction system
- Brightest LED workspace illumination
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18

| | M18 BMT-0 | M18 BMT-421C |
|-----------------------------------|---|-----------------------------------|
| Oscillation angle left/ right (°) | 1.7 | 1.7 |
| No load speed (rpm) | 12,000 - 18,000 | 12,000 - 18,000 |
| Weight with battery pack (kg) | - | 1.7 |
| Kit included | No batteries supplied, 1 x 2.0/ 1 x 4.0 No charger supplied, Ah Battery packs, No kitbox or bag | M12-18 C Charger, supplied Kitbox |
| Article Number | 4933446203 | 4933446272 |

M18 FMS305

M18 FUEL™ ONE-KEY™ 305 MM MITRE SAW

- Delivers the power to cut at the same rate of an equivalent AC 305 mm saw, with the ability to cut up to 500 pieces of 78 mm pine base board on one 12.0 Ah battery charge
- Next generation POWERSTATE™ brushless motor, REDLINK PLUS™ electronics and REDLITHIUM™-ION HIGH OUTPUT™ 12.0 Ah battery pack deliver superior performance, durability and run time in high demand applications
- Large sliding fences gives maximum support to the material being cut providing stability and accuracy
- Trenching stop with depth adjustment allows the user to make trenching and rebate cuts
- ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention
- Integrated carry handle allows easy transportation on and off the jobsite
- Steel detent plate with preset angles gives repeatable accurate cuts

| | M18 FMS305-0 |
|--|---|
| No load speed (rpm) | 3600 |
| Blade diameter (mm) | 305 |
| Bevel capacity left (°) | 48 |
| Bevel capacity right (°) | 48 |
| Mitre capacity left (°) | 55 |
| Mitre capacity right (°) | 60 |
| Max. cutting capacity 45° mitre Left 45° bevel Left [mm] | 235 x 65 |
| Max. cutting capacity 45° mitre Right 45° bevel Right [mm] | 235 x 40 |
| Max. cutting capacity 45° mitre/ 90° bevel [mm] | 235 x 97 |
| Max. cutting capacity 90° mitre/ 45° bevel [mm] | 343 x 65 |
| Max. cutting capacity 90° mitre 90° bevel [mm] | 343 x 97 |
| Max. cutting capacity at fence 90 mitre/90 bevel [mm] | 173 x 28 |
| Bore size (mm) | 30 |
| Weight with battery pack (kg) | - |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933471205 |



M18 FUEL

NEW



Large sliding fences



Trenching stop with depth adjustment



Integrated carry handle

M18 FMS254 | M18 FUEL™ 254 MM MITRE SAW

- Brushless POWERSTATE™ motor for up to 2x longer motor life and up to 25% more power
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- 254 mm blade delivers large and accurate cut capacities
- Quick release bevel setting with detents allows the simple setting of bevel angles to the left and right
- Large sliding fences gives maximum support to the material being cut providing stability and accuracy
- Trenching stop with depth adjustment allows the user to make trenching and rebate cuts
- Up to 307 cuts in 38 mm x 89 mm soft wood with a 9.0 Ah battery gives the ability to work a full day without recharging the battery
- Integrated carry handle allows easy transportation on and off the jobsite
- Steel detent plate with preset angles gives repeatable accurate cuts
- LED light to illuminate the work piece and cut line in low light conditions



M18 FUEL

| | M18 FMS254-0 |
|---|---|
| No load speed (rpm) | 4000 |
| Blade diameter (mm) | 254 |
| Bevel capacity left (°) | 48 |
| Bevel capacity right (°) | 48 |
| Mitre capacity left (°) | 50 |
| Mitre capacity right (°) | 60 |
| Max. cutting capacity 45° mitre/45° bevel [mm] | 205.23 x 51.3 |
| Max. cutting capacity 45° mitre/ 90° bevel [mm] | 205.23 x 91.2 |
| Max. cutting capacity 90° mitre/ 45° bevel [mm] | 289.3 x 51.3 |
| Max. cutting capacity 90° mitre 90° bevel [mm] | 289.3 x 91.2 |
| Bore size (mm) | 30 |
| Weight with battery pack (kg) | 20.0 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933451729 |

M18 SMS216 | M18™ 216 MM MITRE SAW

- Powerful frameless motor delivers 2700 rpm for fast cutting
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Accuracy and durability are achieved with dual vertical steel rails with linear bearings which deliver smooth sliding action
- Rail lock - the saw head locks in the back position automatically
- Adjustable laser - for perfect and quick alignment to cut line
- Steel detent plate with preset angles - gives repeatable accurate cuts
- Lock lever/handle over mold - allows the user to make repeated cuts comfortably and without fatigue
- Mitre release system - for quick and smooth change of the cutting orientation
- Integral LED jobsite light illuminates the work area
- Spindle lock - for quick and easy blade change
- Heavy duty cast base and fence ensures durability and accuracy
- 48°-2° bevel capacity
- Supplied with saw blade (48 teeth), blade spanner and work clamp
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18

| | M18 SMS216-0 |
|---|---|
| No load speed (rpm) | 2700 |
| Blade diameter (mm) | 216 |
| Bevel capacity left (°) | 48 |
| Bevel capacity right (°) | -2 |
| Mitre capacity left (°) | 50 |
| Mitre capacity right (°) | 50 |
| Max. cutting capacity 45° mitre/45° bevel [mm] | 190 x 48 |
| Max. cutting capacity 45° mitre/ 90° bevel [mm] | 190 x 60 |
| Max. cutting capacity 90° mitre/ 45° bevel [mm] | 270 x 48 |
| Max. cutting capacity 90° mitre 90° bevel [mm] | 270 x 60 |
| Bore size (mm) | 30 |
| Weight with battery pack (kg) | 14.5 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933446780 |

M18 FMS190 | M18 FUEL™ 190 MM MITRE SAW

- Brushless POWERSTATE™ motor for up to 2x longer motor life and up to 25% more power
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- 190 mm blade delivers accurate cut capacities
- Quick release bevel setting allows the simple setting of bevel angles to the left and right
- Large sliding fences gives maximum support to the material being cut providing stability and accuracy
- Up to 299 cuts in 38 mm 89 mm soft wood with a 5.0 Ah battery gives the ability to work a full day without recharging the battery
- Light weight and portable at only 12.7 kg
- Integrated carry handle allows easy transportation on and off the jobsite
- Steel detent plate with preset angles gives repeatable accurate cuts
- LED light to illuminate the work piece and cut line in low light conditions
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 FUEL

| | M18 FMS190-0 |
|---|---|
| No load speed (rpm) | 5000 |
| Blade diameter (mm) | 190 |
| Bevel capacity left (°) | 48 |
| Bevel capacity right (°) | 48 |
| Mitre capacity left (°) | 48 |
| Mitre capacity right (°) | 48 |
| Max. cutting capacity 45° mitre/45° bevel [mm] | 152.7 x 39.3 |
| Max. cutting capacity 45° mitre/ 90° bevel [mm] | 152.7 x 55.4 |
| Max. cutting capacity 90° mitre/ 45° bevel [mm] | 215.5 x 39.3 |
| Max. cutting capacity 90° mitre 90° bevel [mm] | 215.5 x 55.4 |
| Max. cutting capacity at fence 0 mitre/0 bevel [mm] | 90.9 x 21.8 |
| Max. cutting capacity at fence L45 mitre/0 bevel [mm] | 90.9 x 20.3 |
| Max. cutting capacity at fence R45 mitre/0 bevel [mm] | 90.9 x 17.8 |
| Bore size (mm) | 30 |
| Weight with battery pack (kg) | 12.7 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459619 |

M18 FCSRH66

M18 FUEL™ REAR HANDLE CIRCULAR SAW FOR WOOD

- Delivers the power to rip cut at the same feed rate of an equivalent AC circular saw, with the ability to cross cut up to 570 pieces of 90 mm x 45 mm pine stud on one 12.0 Ah battery charge
- Next generation POWERSTATE™ brushless motor, REDLINK PLUS™ electronics and REDLITHIUM™-ION HIGH OUTPUT™ 12.0 Ah battery pack deliver superior performance, durability and run time in high demand applications
- Rear handle design circular saw with blade left allows the user excellent cut line visibility
- 190 mm blade which gives a 66 mm depth of cut, enabling the saw to cut 3 stacked OSB boards
- Durable metal rafter hang hook for work space management and safety
- Vacuum adaptor supplied fits directly to all MILWAUKEE® dust extractors
- Magnesium shoe reduces weight and maximises durability
- Integrated LED light for workspace illumination
- 53° bevel capacity



| M18 FCSRH66-0 | |
|------------------------------------|---|
| No load speed (rpm) | 5800 |
| Max. cutting depth 90° (mm) | 66 |
| Max. cutting depth 45° (mm) | 48 |
| Max. cutting depth 50 degrees (mm) | 45 |
| Blade diameter (mm) | 190 |
| Bore size (mm) | 30 |
| Weight with battery pack (kg) | 5.2 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933471444 |

190 X 30 MM 36 TOOTH CIRCULAR SAW BLADE WITH 1.6 MM CUTTING WIDTH

Article Number 4932471301

M18 FUEL

NEW



Rear handle design circular saw with blade left



Durable metal rafter hang hook



53° bevel capacity

M18 CCS55 | M18 FUEL™ 55 MM CIRCULAR SAW FOR WOOD AND PLASTICS

M18 FUEL

- Brushless POWERSTATE™ motor for up to 3x longer motor life and up to 2x more cuts per charge
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- 50° bevel capacity
- Magnesium upper and lower guards provide best in class durability for impact resistance
- Magnesium shoe reduces weight and maximises durability
- Integrated dust blower keeps cut line clear
- Hang hook allows safe storage of the tool
- Integrated battery fuel gauge & LED light
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| M18 CCS55-0 | |
|-------------------------------|--|
| No load speed (rpm) | 5000 |
| Max. cutting depth 90° (mm) | 55 |
| Max. cutting depth 45° (mm) | 41 |
| Blade diameter (mm) | 165 |
| Bore size (mm) | 15.87 |
| Weight with battery pack (kg) | - |
| Kit included | No batteries supplied, No charger supplied, HD Box |
| Article Number | 4933446223 |

165 X 15.87 MM 24 TOOTH CIRCULAR SAW BLADE WITH 1.6 MM CUTTING WIDTH

Article Number 4932471311

M18 BLCS66 | M18™ BRUSHLESS 66 MM CIRCULAR SAW FOR WOOD AND PLASTICS

M18

- M18™ brushless circular saw with a 190 mm blade giving a 66 mm depth of cut which enables the saw to cut three stacked 19 mm OSB boards
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Durable metal rafter hang hook for work space management and safety
- Vacuum adaptor supplied fits directly to all MILWAUKEE® dust extractors
- Pressed aluminum shoe for maximum durability
- Integrated LED light for workspace illumination
- 50° bevel capacity with a 46 mm depth of cut
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 BLCS66-0 | M18 BLCS66-502X |
|-------------------------------|--|---|
| No load speed (rpm) | 5000 | 5000 |
| Max. cutting depth 90° (mm) | 66 | 66 |
| Max. cutting depth 45° (mm) | 48 | 48 |
| Blade diameter (mm) | 190 | 190 |
| Bore size (mm) | 30 | 30 |
| Weight with battery pack (kg) | - | 4.0 |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 5 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933464588 | 4933464591 |

190 X 30 MM 24 TOOTH CIRCULAR SAW BLADE WITH 1.6 MM CUTTING WIDTH

Article Number 4932471300

M18 FCS66 | M18 FUEL™ 66 MM CIRCULAR SAW FOR WOOD AND PLASTICS

REDLITHIUM™-ION BATTERY TECHNOLOGY M18 FUEL

- The M18 FUEL™ circular saw delivers the power to rip cut at the same feed rate of an equivalent AC circular saw - with the ability to cut 750 pieces of 90 mm x 45 mm pine stud on one 12.0 Ah battery charge
- Next generation POWERSTATE™ brushless motor, REDLINK PLUS™ electronics and REDLITHIUM™-ION HIGH OUTPUT™ 12.0 Ah battery pack deliver superior performance, durability and run time in high demand applications
- 190 mm blade which gives a 66 mm depth of cut, enabling the saw to cut 3 stacked OSB boards
- Durable metal rafter hang hook for work space management and safety
- Vacuum adaptor supplied fits directly to all MILWAUKEE® dust extractors
- Magnesium shoe reduces weight and maximises durability
- Integrated LED light for workspace illumination
- 56° bevel capacity



| | M18 FCS66-0 | M18 FCS66-121C |
|-------------------------------|---|---|
| No load speed (rpm) | 5800 | 5800 |
| Max. cutting depth 90° (mm) | 66 | 66 |
| Max. cutting depth 45° (mm) | 48 | 48 |
| Blade diameter (mm) | 190 | 190 |
| Bore size (mm) | 30 | 30 |
| Weight with battery pack (kg) | - | 5.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1 x 12.0 Ah Battery pack, M12-18 FC Charger, Kitbox |
| Article Number | 4933464725 | 4933464587 |

190 X 30 MM 24 TOOTH CIRCULAR SAW BLADE WITH 1.6 MM CUTTING WIDTH

Article Number 4932471300

HD18 CS | M18™ 55 MM CIRCULAR SAW FOR WOOD AND PLASTIC

M18

- Powerful 3500 rpm motor easily cuts most timber construction materials
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Large 50° bevel facility
- Magnesium upper and lower guards provide best in class durability for impact resistance
- Excellent visibility of cutting line
- Electronic motor brake, saw blade stops within seconds
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries
- Supplied with 24 tooth saw blade, parallel guide, dust port and allen key



| | HD18 CS-0 | HD18 CS-402B |
|-------------------------------|---|--|
| No load speed (rpm) | 3500 | 3500 |
| Max. cutting depth 90° (mm) | 55 | 55 |
| Max. cutting depth 45° (mm) | 39 | 39 |
| Blade diameter (mm) | 165 | 165 |
| Bore size (mm) | 15.87 | 15.87 |
| Weight with battery pack (kg) | - | 3.8 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 4.0 Ah Battery packs, M12-18 C Charger, Tool bag |
| Article Number | 4933419134 | 4933441403 |

165 X 15.87 MM 24 TOOTH CIRCULAR SAW BLADE WITH 1.6 MM CUTTING WIDTH

Article Number 4932471311

M18 FTS210

M18 FUEL™ ONE-KEY™ TABLE SAW

- The ONE-KEY™ M18 FUEL™ table saw delivers the power to rip cut at the same feed rate of an equivalent AC saw, with the ability to cut 190 m of 19 mm OSB board on one 12.0 Ah battery charge
- Next generation POWERSTATE™ brushless motor, REDLINK PLUS™ electronics and REDLITHIUM™-ION HIGH OUTPUT™ 12.0 Ah battery pack deliver superior performance, durability and run time in high demand applications
- Rack and pinion sliding fence allows the fence to be adjusted accurately and easily from the front of the saw giving 622 mm of rip capacity
- 210 mm blade allows 63 mm depth of cut at 90 degrees
- ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention
- Quick change guard and riving knife allows the user to remove and adjust the riving knife and guard without the need to remove the throat plate



| | M18 FTS210-0 | M18 FTS210-121B |
|-------------------------------|---|--|
| No load speed (rpm) | 6300 | 6300 |
| Blade diameter (mm) | 210 | 210 |
| Bevel capacity (°) | 47 | 47 |
| Rip capacity (mm) | 622 | 622 |
| Depth of cut capacity (mm) | 63.5 | 63.5 |
| Weight with battery pack (kg) | - | 22.3 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1 x 12.0 Ah Battery pack, M12-18 FC Charger, No kitbox or bag supplied |
| Article Number | 4933464722 | 4933464226 |

210 X 30 MM 16 TOOTH CIRCULAR SAW BLADE WITH 2.4 MM CUTTING WIDTH

Article Number **4932471324**



M18 FUEL



Anti-kick-back pawls stops material kicking back at the operator



Rack and pinion sliding fence allows the fence to be adjusted accurately and easily from the front of the saw



On fence push stick storage

M18 ONESX

M18 FUEL™ ONE-KEY™ SAWZALL™

- M18 CSX but with ONE-KEY™ technology
- Connect via Bluetooth® with the ONE-KEY™ app
- ONE-KEY™ tool customisation allows the user to optimise their tool for specific applications
- Custom cut control provides advanced control over cutting speeds
- Adjustable soft start provides more accurate cut-starts in various materials minimising blade chatter and assisting in cleaner faster cuts
- Cut optimisation gives longer blade life and easier cutting in a wide range of materials
- Automatic brake allows the saw to stop the blade after it breaks through a material preventing accidental cuts in adjacent materials
- Plunge cut allows the blade to penetrate the material at a slower speed and then automatically ramp to full speed, sensing an increase in force from the user
- Save up to four custom settings to the tools memory allowing fast and easy selection of the most used configurations
- ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention
- Flexible battery system: works with all MILWAUKEE® M18™ batteries

| | M18 ONESX-0 | M18 ONESX-502X |
|--|---|------------------------------------|
| Max. cutting depth in soft_wood (mm) | 300 | 300 |
| Max. cutting depth in steel (mm) | 20 | 20 |
| Max. cutting depth in aluminium (mm) | 25 | 25 |
| Max. cutting depth in non_ferrous metal (mm) | 25 | 25 |
| Max. cutting depth in metal pipe (mm) | 150 | 150 |
| No load stroke rate (spm) | 0 - 3000 | 0 - 3000 |
| Stroke length (mm) | 28.6 | 28.6 |
| Weight with battery pack (kg) | - | 4.0 |
| Kit included | No batteries supplied, No charger supplied, packs, M12-18 FC No kitbox or bag | 2 x 5.0 Ah Battery charger, HD Box |
| Article Number | 4933451665 | 4933451667 |



Complete tool customisation via ONE-KEY™ app to tune the tool to your needs



Save profiles for application specific repeatable precision



Inventory functionality for total fleet management

M18 FTR | M18 FUEL™ TRIM ROUTER

- POWERSTATE™ brushless motor delivers the power of AC trim routers, max. 31,000 rpm for powerful, smooth cutting
- Variable speed dial allows users to adjust the speed between 10,000 and 31,000 RPM to choose the best control for the application at hand
- All day run time on a single charge of an M18™ 5.0 Ah battery (up to 115 m)
- Innovative height adjustment system incorporating a 0.4 mm micro adjustment
- Active brake stops the router bit quickly
- Included plunge base features 3 stop pins for multiple pass mortising
- Dual LED lights to illuminate the work surface
- Compatible with the dust collection shroud (DEK 26)
- Supplied with 2 x dust extraction attachments, 146 mm sub-baseplate which accepts 31.75 mm guide bushings, 6 mm and 6.35 mm collets, plunge base, 2 x side fences
- Integrates three MILWAUKEE®-exclusive technologies - the POWERSTATE™ brushless motor, REDLITHIUM™-ION battery pack and REDLINK PLUS™ intelligence hardware and software - which deliver outstanding power, run time and durability on the jobsite
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



NEW M18 FUEL

M18 FTR-0X

| | |
|-------------------------------|--|
| Collet capacity (mm) | 6/ 6.35 |
| Plunge capacity (mm) | 50 |
| No load speed (rpm) | 10,000 - 31,000 |
| Speed settings | 6 |
| Weight with battery pack (kg) | 3.6 |
| Kit included | No batteries supplied, No charger supplied, HD Box |
| Article Number | 4933471604 |

TRIM ROUTER OFF SET BASE ATTACHMENT, FOR TRIMMING CLOSE TO WALLS

Article Number **4932471946**



M18 BSX | M18™ SAWZALL™

- High performance 4-pole motor delivers maximum power whilst maximising the power to weight ratio
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Patented FIXTEC™ clamp for fast and easy keyless blade change
- Counter balance mechanism to reduce vibrations 15.2 m/s² in wooden beams
- 28.6 mm stroke length & 3000 strokes per minute for extremely fast cutting
- Fuel gauge displays remaining charge
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 BSX-0 | M18 BSX-402C |
|--|--|------------------------------------|
| Max. cutting depth in soft_wood (mm) | 300 | 300 |
| Max. cutting depth in steel (mm) | 20 | 20 |
| Max. cutting depth in aluminium (mm) | 25 | 25 |
| Max. cutting depth in non_ferrous metal (mm) | 25 | 25 |
| Max. cutting depth in metal pipe (mm) | 150 | 150 |
| No load stroke rate (spm) | 3000 | 3000 |
| Stroke length (mm) | 28.6 | 28.6 |
| Weight with battery pack (kg) | - | 4.0 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag | 2 x 4.0 Ah Battery charger, Kitbox |
| Article Number | 4933447275 | 4933447290 |

M18 FSX

M18 FUEL™ SUPER SAWZALL™

- The M18 FUEL™ Super SAWZALL™ delivers the power to cut at the same speed as an equivalent AC reciprocating saw - with the ability to cut 150 pieces of 290 mm x 45 mm pine on one 12.0 Ah battery charge
- Next generation POWERSTATE™ brushless motor, REDLINK PLUS™ electronics and REDLITHIUM™-ION HIGH OUTPUT™ 12.0 Ah battery pack deliver superior performance, durability and run time in high demand applications
- Orbital action allows the saw to clear the cut of debris giving a faster cut in wood materials
- 3000 SPM with a 32 mm stroke length delivers fast and effortless cutting in a wide range of materials
- 5 variable speed settings from 1500 SPM to 3000 SPM to allow the correct speed to be set for the material being cut
- FIXTEC™ blade clamp for fast and easy blade changes without any key
- Durable metal rafter hang hook for work space management and safety
- Adjustable shoe for optimised use of blades
- Integrated LED light for workspace illumination

| | M18 FSX-0C | M18 FSX-121C |
|--|--|---|
| Max. cutting depth in soft wood (mm) | 300 | 300 |
| Max. cutting depth in steel (mm) | 20 | 20 |
| Max. cutting depth in aluminium (mm) | 25 | 25 |
| Max. cutting depth in non ferrous metal (mm) | 25 | 25 |
| Max. cutting depth in metal pipe (mm) | 150 | 150 |
| No load stroke rate (spm) | 0 - 3000 | 0 - 3000 |
| Stroke length (mm) | 32 | 32 |
| Weight with battery pack (kg) | - | 5.5 |
| Kit included | No batteries supplied, No charger supplied, Kitbox | 1 x 12.0 Ah Battery pack, M12-18 FC Charger, Kitbox |
| Article Number | 4933464724 | 4933464485 |



5 variable speed settings



FIXTEC™ blade clamp



Durable metal rafter hang hook

150 MM HEAVY DUTY TORCH™ CARBIDE TEETH DEMOLITION BLADE WITH 3.6 MM TOOTH PITCH

Article Number **48005201**



M18 FUEL

C18 HZ | M18™ HACKZALL™

- High performance compact one handed use HACKZALL™, measuring only 375mm in length, makes it ideal for working within confined spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Dual gear counter balance reduces vibration and increases tool life
- Patented FIXTEC™ clamp for fast keyless blade change
- 20 mm stroke length for controlled cutting with a no load stroke rate of 3000 spm
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- Built in LED light illuminates the work surface
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | C18 HZ-0 |
|-------------------------------|---|
| No load stroke rate (spm) | 0 - 3000 |
| Stroke length (mm) | 20 |
| Weight with battery pack (kg) | - |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933416785 |

HACKZALL™ BLADE SET (10 PCS); 2 X 49005460, 3 X 49005614, 3 X 49005424, 2 X 49005418

Article Number **49220220**



M18 FBJS | M18 FUEL™ BODY GRIP JIGSAW

- Brushless POWERSTATE™ motor for fast cutting, long tool life and up to 32 m in 19 mm OSB (on a 5.0 Ah pack)
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Patented FIXTEC™ blade clamp for fast and easy blade change
- 5 stage pendulum action for increased cutting performance
- Ambidextrous on / off switch allows user to turn the tool on in any position
- 6-speed settings with auto controlled start mode allows the tool to start slow and ramp up to full speed when load is detected for smooth and accurate cut starts
- 3500 SPM delivers smooth cuts, minimised chipping and vibration
- Dust blower keeps the cut line free of wood dust
- Integrated LED light for workspace illumination
- Detachable soft shoe avoids marks and scratches when cutting soft materials



| | M18 FBJS-0X | M18 FBJS-502X |
|----------------------------------|--|---|
| No load stroke rate (spm) | 800 - 3500 | 800 - 3500 |
| Max. cutting capacity wood (mm) | 100 | 100 |
| Max. cutting capacity steel (mm) | 10 | 10 |
| Stroke length (mm) | 25 | 25 |
| Weight with battery pack (kg) | - | 2.8 |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933464799 | 4933464801 |

75 X 4 MM T 144 D FAST CUTTING JIGSAW BLADE FOR WOOD, 5 PCS

Article Number **4932213116**



M18 FHZ | M18 FUEL™ HACKZALL™

- POWERSTATE™ brushless motor provides increased efficiency, lasts longer and delivers maximum power
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- 22 mm stroke length for controlled cutting with a no load stroke rate of 3000 spm
- Pivoting shoe allows the user to optimise his cutting position
- Built in LED light improves visibility in low light cutting applications
- Patented FIXTEC™ clamp for quick and efficient blade change
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 FUEL

| | M18 FHZ-0X | M18 FHZ-502X |
|-------------------------------|--|---|
| No load stroke rate (spm) | 0 - 3000 | 0 - 3000 |
| Stroke length (mm) | 22 | 22 |
| Weight with battery pack (kg) | - | 2.6 |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933459887 | 4933459886 |

HACKZALL™ BLADE SET (10 PCS); 2 X 49005460, 3 X 49005614, 3 X 49005424, 2 X 49005418

Article Number **49220220**



M18 FJS | M18 FUEL™ TOP HANDLE JIGSAW

- Brushless POWERSTATE™ motor for fast cutting, long tool life and up to 32 m in 19 mm OSB (on a 5.0 Ah pack)
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Patented FIXTEC™ blade clamp for fast and easy blade change
- Keyless bevel facility on the base plate allows for adjustment between 0 - 45°
- 5 stage pendulum action for increased cutting performance
- Dust blower keeps the cut line free of wood dust
- Integrated LED light for workspace illumination
- Detachable soft shoe avoids marks and scratches when cutting soft materials
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 FJS-0X | M18 FJS-502X |
|----------------------------------|--|---|
| No load stroke rate (spm) | 0 - 3500 | 0 - 3500 |
| Max. cutting capacity wood (mm) | 135 | 135 |
| Max. cutting capacity steel (mm) | 10 | 10 |
| Bevel capacity (°) | 45 | 45 |
| Stroke length (mm) | 25 | 25 |
| Weight with battery pack (kg) | - | 2.9 |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933464726 | 4933464728 |

75 X 4 MM T 144 D FAST CUTTING JIGSAW BLADE FOR WOOD, 5 PCS

Article Number **4932213116**



M18 BJS | M18™ TOP HANDLE JIGSAW

- High performance motor delivers 2800 spm for fast cutting
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Patented FIXTEC™ blade clamp for fast and easy blade change
- Keyless bevel facility on the base plate allows for adjustment between 0 - 45°
- Five stage pendulum action for increased cutting performance
- LED light to illuminate the work piece
- Dust blower keeps the cut line free of wood dust
- Detachable soft shoe avoids marks and scratches when cutting soft materials
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 BJS-0 | M18 BJS-402C |
|----------------------------------|---|--|
| No load stroke rate (spm) | 0 - 2800 | 0 - 2800 |
| Max. cutting capacity wood (mm) | 135 | 135 |
| Max. cutting capacity steel (mm) | 10 | 10 |
| Stroke length (mm) | 25 | 25 |
| Weight with battery pack (kg) | - | 2.5 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 4.0 Ah Battery packs, M12-18 C Charger, Kitbox |
| Article Number | 4933451391 | 4933451390 |

75 X 2.5 MM T 101 B JIGSAW BLADE, 5 PCS

Article Number 4932254061



M18 BP | M18™ PLANER

- High performance 4-pole motor delivers 14,000 rpm to achieve optimum surface finish
- REDLINK™ overload protection and constant speed electronics in tool deliver best in class durability and performance
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Faster material removal with two double edged carbide blades over a planing width of 82 mm
- Adjustable depth of cut from 0 to 2 mm with twenty locking positions allows the user to accurately set the amount of material to be removed in one pass
- Up to 10.7 mm of rebate depth
- Left or right chip ejection allows the user to keep the chips away from his face when planing
- Extended front shoe allows the tool to be placed on the work piece accurately and quickly
- A kick stand located on the base protects the work piece from accidental damage



| | M18 BP-0 | M18 BP-402C |
|-------------------------------|---|--|
| No load speed (rpm) | 14,000 | 14,000 |
| Cutting width (mm) | 82 | 82 |
| Cutting depth (mm) | 2 | 2 |
| Rebate depth (mm) | 10.7 | 10.7 |
| Weight with battery pack (kg) | - | 2.7 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 4.0 Ah Battery packs, M12-18 C Charger, Kitbox |
| Article Number | 4933451113 | 4933451115 |

2 X TUNGSTEN CARBIDE REVERSIBLE BLADES

Article Number 4932273484



M18 BOS125 | M18™ 125 MM RANDOM ORBITAL SANDER

- High performance motor delivers 14,000 to 24,000 sanding strokes per minute for faster material removal
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Variable speed wheel with 6 speed settings allows the correct speed to be set for different types of material
- Dust extraction box with internal filter keeps dust contained and managed
- Universal hook and loop sanding pad allows easy changing of sanding discs
- Lightweight - 1.6 kg
- Vacuum adaptor supplied fits directly to all MILWAUKEE® dust extractors
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 BOS125-0 | M18 BOS125-502B |
|-------------------------------|---|--|
| No load speed (rpm) | 12,000 | 12,000 |
| Oscillation rate (opm) | 14,000 - 24,000 | 14,000 - 24,000 |
| Oscillation diameter (mm) | 2.4 | 2.4 |
| Sanding pad size (mm) | 125 | 125 |
| Weight with battery pack (kg) | - | 1.6 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 5.0 Ah Battery packs, M12-18 C Charger, Tool bag |
| Article Number | 4933464228 | 4933464230 |

M18 FFN M18 FUEL™ FRAMING NAILER

- Best-in-class power to consistently seat nails sub-flush to the surface in hardwoods
- Ready to Fire Nail Technology eliminates ramp-up time between each nail discharge
- No gas cartridges and no cleaning required, designed to deliver durability and reliability to the most demanding users with very little maintenance
- Two mode selection allows for sequential fire for precision or bump fire for speed
- Tool-free, quick and easy depth adjustment to assure nails are driven sub-flush
- Dry-Fire lockout stops the tool being fired when there are no nails left in the magazine
- Fires up to 700 nails per charge on a REDLITHIUM™-ION 5.0 Ah battery pack for maximum productivity
- Fires standard framing nails which fits an angled magazine at 30° or 34°
- Quick access and easy clearing of jams
- LED work light illuminates the work surface for better placement of nails
- Integrates three MILWAUKEE®-exclusive technologies - the POWERSTATE™ brushless motor, REDLITHIUM™-ION battery pack and REDLINK PLUS™ intelligence hardware and software - which deliver outstanding power, run time and durability on the jobsite
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 FFN-0C | M18 FFN-502C |
|-------------------------------|--|---|
| Collation angle (degrees) | 30 - 34 | 30 - 34 |
| Nail diameter (mm) | 2.9 - 3.32 | 2.9 - 3.32 |
| Nail type (mm) | 50 - 90 | 50 - 90 |
| Magazine capacity nails | 57 | 57 |
| Weight with battery pack (kg) | - | 5.1 |
| Kit included | No batteries supplied, No charger supplied, Kitbox | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, Kitbox |
| Article Number | 4933471406 | 4933471405 |

EXTENDED MAGAZINE FOR M18 FUEL™ FRAMING NAILER

Article Number 4932471605



M18 FUEL

NEW



Two mode selection



Tool-free, quick and easy depth adjustment



Hanging hook

M18 FN18GS | M18 FUEL™ 18 GS FINISH NAILER

- Best-in-class power to consistently seat nails sub-flush to the surface in hardwoods
- Ready to Fire Nail Technology eliminates ramp-up time between each nail discharge
- No gas cartridges and no cleaning required, designed to deliver durability and reliability to the most demanding users with very little maintenance
- Smaller nail hole, the exact size of the nail head leaving a neater finish
- Different shaped noses stored on board allows the user to get the best finish no matter what the application
- Small work contact bracket allows the user to fire and sink nails at a more acute angle
- Tool-free, quick and easy depth adjustment to assure nails are driven sub-flush
- Dry-Fire lockout stops the tool being fired when there are no nails left in the magazine
- Fires up to 1200 nails per charge on a REDLITHIUM™-ION 2.0 Ah battery pack for maximum productivity
- Quick access and easy clearing of jams
- LED work light illuminates the work surface for better placement of nails



| | M18 FN18GS-0X | M18 FN18GS-202X |
|-------------------------------|--|---|
| Collation angle (degrees) | 0 | 0 |
| Nail diameter (mm) | 1.2 | 1.2 |
| Nail type (mm) | 16 / 54 | 16 / 54 |
| Magazine capacity nails | 110 | 110 |
| Cycle rate | 900 | 900 |
| Weight with battery pack (kg) | - | 3.1 |
| Kit included | No batteries supplied, No charger supplied, HD Box | 2 x 2.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933471409 | 4933471408 |

M18 FBPV | M18 FUEL™ BACKPACK VACCUUM

- Brushless POWERSTATE™ motor for advanced suction power and longer motor life
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Dust class L. Standard MAK-factor > 1 mg/m³
- HEPA filter will collect 99.97% of airborne particles down to 0.3 microns
- DEK 26 compatible allows the vacuum to be easily connected to a powertool
- Low noise of only 76 db (operating sound level)
- Cyclonic technology for longer filter life, extended peak performance and bag-less debris collection
- Integrated hanging hook for ladders and scaffolding
- Removable harness transforms the vacuum into a canister style vacuum
- Supplied with 1 x floor tool, 1 x crevice tool, 1 x telescopic extension wand, 1 x flexible hose, 1 x dust extraction adaptor



M18 FUEL

| M18 FBPV-0 | |
|-------------------------------|---|
| Capacity solids (l) | 3.6 |
| Hose diameter (mm) | 36 |
| Max. vacuum (mbar) | 189 |
| Air volume (l/min) | 1557.43 |
| Filter type | HEPA |
| Sealed suction [mm] | 1905 v H2O |
| Weight with battery pack (kg) | 8.5 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933464483 |

M18 VC2 | M18™ WET/DRY VACUUM

- Powerful 18 V motor with a maximum air flow of 1300 l/min / 80 bar provides excellent suction power for both wet and dry clean up applications
- HEPA filter will collect 99.97% of airborne particles down to 0.03 microns for fine dust collection
- Up to 30 minutes run time with M18™ 9.0 Ah battery pack
- Internal accessory and hose storage allows all attachments to be carried with the tool avoiding loss of equipment
- DEK 26 compatible allows the vacuum to be easily connected to a powertool
- Stackable tool box design for added portability and easier storage
- On board blower for moving debris away from the work area
- Waterproof switch prevents switch damage over the life time of the tool
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18

| M18 VC2-0 | |
|-------------------------------|---|
| Capacity solids (l) | 9.79 |
| Capacity liquids (l) | 7.5 |
| Hose diameter (mm) | 41 |
| Hose length (m) | 0.47 |
| Max. vacuum (mbar) | 80 |
| Air volume (l/min) | 1300 |
| Filter type | Wet/Dry |
| Weight with battery pack (kg) | 5.3 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933464029 |

M18 CV | M18™ HAND VAC

- Excellent suction power for wood, metal and common debris
- HEPA filter will collect 99.97% of airborne particles down to 0.3 microns
- Lock on switch reduces fatigue during sustained use
- Versatile accessories for small or large clean up areas
- Secure canister lock guards against unwanted spillage
- Clear viewing window gives the user the ability to see debris build up
- Up to 23 minutes continuous run time on a 5.0 Ah battery
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18

| M18 CV-0 | |
|-------------------------------|---|
| Capacity solids (l) | 2.5 |
| Hose diameter (mm) | 32 |
| Hose length (m) | 1.2 |
| Max. vacuum (mbar) | 84.8 |
| Air volume (l/min) | 1019.33 |
| Filter type | Dry |
| Weight with battery pack (kg) | 1.9 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459204 |

M18 BHG | M18™ HEAT GUN

- High performance heat coil allows the tool to reach 470 °C
- Reaches operational temperature in six seconds allowing the user to quickly complete his application
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Durable ladder hook for work space management and safety
- Supplied with 2x nozzles: 1x reduction nozzle for heat intensity on a specific area, 1x reflector nozzle to apply heat around an object, such as pipes
- Integrated LED light to illuminate the work area
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18

| | M18 BHG-0 | M18 BHG-502C |
|---|---|--|
| Temperature range (°C) | 470 | 470 |
| Air volume (l/min) | 170 | 170 |
| Recommended ambient operating temperature [degrees] | -18 - +52 | -18 - +52 |
| Weight with battery pack (kg) | - | 1.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 5.0 Ah Battery packs, M12-18 C Charger, Kitbox |
| Article Number | 4933459771 | 4933459773 |

M18 BTP

M18™ COMPACT TRANSFER PUMP

NEW

- 18V transfer pump with 3.4 kg in weight, it's lighter than other corded transfer pumps with an equal performance
- With a flow rate of 1817 l/h, it can deliver 908 l of transferred water with one M18™ 5.0 Ah battery charge
- REDLINK™ intelligence can recognise when the tool stops moving water and automatically shuts itself off to avoid dry pumping
- The tool's flexible impeller and powerful motor generate a lift height up to 5.5 m and a head height up to 23 m
- 3/4" BSPT male thread reception for any standard water hose available. For the inlet, a hose with 19 mm inner diameter is recommended, for optimised performance
- To be used for water, clear of debris only
- Flexible battery system: works with all MILWAUKEE® M18™ batteries

M18



Flexible impeller



Closed battery compartment



Transfers up to five 180 l boilers on one M18™ 5.0 Ah battery charge



| M18 BTP-0 | |
|-------------------------------|---|
| Flow rate (l/h) | 1817 |
| Flow rate [litres per minute] | 30.3 |
| Max. suction lift [m] | 5.5 |
| Max. water lift [m] | 23 |
| Max. water temperature [°C] | 60 |
| IP protection class | IP54 |
| Thread size (mm) | 3/4" (19 mm) #No value# |
| Weight with battery pack (kg) | 4.0 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933471494 |

C18 PCG/600 | M18™ CAULK GUN WITH 600 ML TUBE

- Up to 4500 N of force. Min 40% higher than previous MILWAUKEE® caulk gun
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Optimised performance with all adhesives and cool temperatures
- Anti-drip feature prevents unwanted dripping when trigger is released
- Dial control with 6 speed settings allows for maximum bead control
- Large robust plunger design ensures constant flow, reduces blow back and expels all sealant from cartridge
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | C18 PCG/600A-201B | C18 PCG/600T-201B |
|-------------------------------|---|---|
| Max. pushing force (N) | 4500 | 4500 |
| Speed settings | 6 | 6 |
| Standard equipment | 600 ml aluminium | 600 ml transparent |
| Weight with battery pack (kg) | 2.3 | 2.3 |
| Kit included | 1 x 2.0 Ah Battery pack, M12-18 C Charger, Tool bag | 1 x 2.0 Ah Battery pack, M12-18 C Charger, Tool bag |
| Article Number | 4933448758 | 4933441810 |

600 ML ALUMINIUM SAUSAGE TUBE BARREL. REQUIRES PLUNGER ROD (48091091) AND PISTON (44700375)

Article Number 4932352845



C18 PCG/400 | M18™ CAULK GUN WITH 400 ML TUBE

- Up to 4500N of force. Min 40% higher than previous MILWAUKEE® caulk gun
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Optimised performance with all adhesives and cool temperatures
- Anti-drip feature prevents unwanted dripping when trigger is released
- Dial control with 6 speed settings allows for maximum bead control
- Large robust plunger design ensures constant flow, reduces blow back and expels all sealant from cartridge
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | C18 PCG/400T-201B |
|-------------------------------|---|
| Max. pushing force (N) | 4500 |
| Speed settings | 6 |
| Standard equipment | 400 ml transparent tube |
| Weight with battery pack (kg) | 2.3 |
| Kit included | 1 x 2.0 Ah Battery pack, M12-18 C Charger, Tool bag |
| Article Number | 4933441814 |

400 ML TRANSPARENT SAUSAGE TUBE BARREL. REQUIRES PLUNGER ROD (48091090) AND PISTON (44700375)

Article Number 4932352842



C18 PCG/310 | M18™ CAULK GUN WITH 310 ML CANISTER

- Up to 4500 N of force. Min 40% higher than previous MILWAUKEE® caulk gun
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Optimised performance with all adhesives and cool temperatures
- Anti-drip feature prevents unwanted dripping when trigger is released
- Dial control with 6 speed settings allows for maximum bead control
- Large robust plunger design ensures constant flow, reduces blow back and expels all sealant from cartridge
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | C18 PCG/310C-201B |
|-------------------------------|---|
| Max. pushing force (N) | 4500 |
| Speed settings | 6 |
| Standard equipment | 310 ml canister cartridge holder |
| Weight with battery pack (kg) | 2.3 |
| Kit included | 1 x 2.0 Ah Battery pack, M12-18 C Charger, Tool bag |
| Article Number | 4933448759 |

310 ML STANDARD CARRIAGE. INCLUDES PLUNGER ROD ASSEMBLY (4932352937), PISTON FOR CARRIAGE ASSEMBLIES AND A FEED SCREW (44700330)

Article Number 48081076



M18 GG | M18™ GREASE GUN

- Powerful 18V motor delivers over 562 bar max. operating pressure
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Best in class run time - dispenses up to 7 cartridges per charge
- Superior handle balance and ergonomics - only 355 mm long and 3.9 kg
- Air bleeder valve - priming mechanism for quick flow
- Integrated hose storage, shoulder strap loop & LED fuel gauge - added user convenience and less down time
- Three way loading - bulk, cartridge and suction capable
- Grease capacity 400 ml cartridge, 473 ml bulk
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M18™ batteries
- Supplied with 1219 mm high pressure flex hose with spring guard



| | M18 GG-0 |
|-------------------------------|---|
| Pressure (bar) | 562 |
| Weight with battery pack (kg) | - |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933440493 |

M18 BBL | M18™ BATTERY BLOWER

- Compact body - clears dirt and debris in tight spaces
- Power control - 3 speed settings with variable speed trigger
- Versatile attachments - nozzle extension (228.6 mm), universal inflator/deflator attachment
- Removable nozzle for easy, convenient storage
- Lock-on switch
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 BBL-0 |
|-------------------------------|---|
| Air volume (m³ per minute) | 0 - 2.9 |
| Airflow speed (km/h) | 0 - 42.8 |
| Fan speed [rpm] | 0 - 18,700 |
| Length without nozzle (mm) | 375 |
| Weight with battery pack (kg) | 1.2 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933446216 |

M18 AF | M18™ AIR FAN

- AC/DC, allows the user to run on M18™ REDLITHIUM™-ION or AC power when available
- Three speed settings for optimised air flow up to 1290 meters per hour
- Efficient air circulation circulates the air within a 3.6 m x 4 m room
- Adjustable head allows the user to utilise the fan in various heights and positions over a range of 120°
- Three hours run time on speed three with a M18™ REDLITHIUM™-ION 4.0 Ah battery pack
- Compact design with integrated carry handle to maximise portability
- Rubber feet provide stability and no surface scratches
- Fixing points gives the user the option to wall mount the fan if needed
- AC adaptor supplied
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 AF-0 |
|-------------------------------|---|
| Voltage (DC) (V) | 18 |
| Voltage (AC) (V) | 220 - 240 |
| Battery type | Li-ion |
| Airflow speed 1 (m³ per h) | 760 |
| Airflow speed 2 (m³ per h) | 1000 |
| Airflow speed 3 (m³ per h) | 1290 |
| Weight with battery pack (kg) | 2.7 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933451023 |

M18 JSR DAB+

M18™ JOBSITE RADIO DAB+

- High performance audio system - DAB+/FM tuner with digital processor delivers highest reception accuracy and signal clarity
- DAB+ gives best sound quality and additional information like: song, artist and accurate time
- Dual speaker with passive radiators - deliver loud, clear sound with deep, accurate bass
- Customisable equalizer for enhanced sound quality and 10-station preset
- Shock absorbing end caps and metal speaker grills - protect from drops, water and debris on the jobsite
- Integrated handles - allow for easy transport and storage
- Powered by MILWAUKEE® M18™ batteries or AC outlet. Up to 12 hours of runtime with an M18™ REDLITHIUM™-ION 5.0 Ah battery pack
- Weather sealed device compartment protects mobile devices
- Protected 2.1 A USB power outlet - charges electronic devices in both AC and DC mode
- Supplied with auxiliary input cord, 2 x AAA batteries. MILWAUKEE® batteries sold separately



| M18 JSR DAB+-0 | |
|-------------------------------|---|
| Voltage (DC) (V) | 18 |
| Voltage (AC) (V) | 220 - 240 |
| Battery type | Li-ion |
| Tuning range AM (kHz) | - |
| Tuning range FM (MHz) | 87.5 - 108 |
| Tuning range DAB | 174.928 - 239.20 |
| Dimensions (mm) | 402 x 197 x 197 |
| Weight with battery pack (kg) | 4.9 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933451252 |



Weather sealed device compartment protects mobile devices



Shock absorbing end caps



Integrated handles

M18 JSR | M18™ JOBSITE RADIO

- High performance audio system - AM/FM tuner with digital processor delivers highest reception accuracy and signal clarity
- Dual speaker with passive radiators - deliver loud, clear sound with deep, accurate bass
- Customisable equalizer for enhanced sound quality and 10-station preset
- Shock absorbing end caps and metal speaker grills - protect from drops, water and debris on the jobsite
- Integrated handles - allow for easy transport and storage
- Powered by MILWAUKEE® M18™ batteries or AC outlet. Up to 12 hours of runtime with an M18™ REDLITHIUM™-ION 5.0 Ah battery pack
- Weather sealed device compartment protects mobile devices
- Protected 2.1 A USB power outlet - charges electronic devices in both AC and DC mode



| M18 JSR-0 | |
|-------------------------------|---|
| Tuning range AM (kHz) | 522 - 1629 |
| Tuning range FM (MHz) | 87.5 - 108 |
| Dimensions (mm) | 402 x 197 x 197 |
| Weight with battery pack (kg) | 4.9 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933451473 |

M18 RC | M18™ JOBSITE RADIO/CHARGER WITH BLUETOOTH®

- Built in charger function allows for quick, convenient charging of any M18™ battery or electronic devices via USB port
- Digital Bluetooth® receiver: play music up to 30 m away from your smartphone, computer, or tablet
- AC/DC versatility: powered by MILWAUKEE® M18™ batteries, or 230 V mains supply
- Exclusive AM/FM tuner with digital processor delivers highest reception accuracy and signal clarity
- Premium speaker and 40 W amplifier produce rich, full sound
- Weather sealed auxiliary compartment protects Mp3 players and other audio devices
- Reinforced roll cage and metal handles protects against abusive jobsite conditions
- Customisable equalizer and 10-station preset
- Protected 2.1 Amp USB power outlet charges devices in both AC and DC mode
- Supplied with auxiliary input cord, 2 x AAA batteries. MILWAUKEE® batteries sold separately
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| M18 RC-0 | |
|--------------------|---|
| Voltage (DC) (V) | 18 |
| Voltage (AC) (V) | 220 - 240 |
| Battery type | Li-ion |
| Dimensions (mm) | 300 x 307 x 370 |
| Speaker output (W) | 40 |
| Weight (kg) | 7.7 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933446647 |

M12-18 JSSP | M12™ - M18™ BLUETOOTH® SPEAKER

- Advanced technology Bluetooth® jobsite speaker
- Bluetooth® wireless range of up to 30 m
- Flexible battery system: works with all MILWAUKEE® M12™ & M18™ batteries
- IP54 rated, water and debris resistant to withstand tough conditions on and off the jobsite
- Loud, clear sounds at all volumes
- 2.1A USB charger, charges phones, tablets and media players
- Premium speaker with bass port



| M12-18 JSSP-0 | |
|-------------------------------|---|
| Dimensions (mm) | 360 x 165 x 165 |
| Speaker output (W) | 40 |
| Weight with battery pack (kg) | 2.3 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459275 |

M18 FPP6D2 | M18 FUEL™ POWERPACK

- M18 FPD2 - M18 FUEL™ percussion drill
- M18 CAG115XPDB - M18 FUEL™ 115 mm angle braking grinder with paddle switch
- M18 FJS - M18 FUEL™ JIGSAW
- M18 CCS55 - M18 FUEL™ 55 mm circular saw for wood and plastics
- M18 FID2 - M18 FUEL™ Impact Driver
- M18 TLED - M18™ LED torch



M18 FPP6D2-503B

| | |
|----------------|--|
| Kit included | 3 x 5.0 Ah Battery packs, M12-18 FC Charger, Tool bag |
| Article Number | 4933464918 |

M18 ONEPP2A2 | M18 FUEL™ ONE-KEY™ POWERPACK

- M18 ONEPD2 - M18 FUEL™ ONE-KEY™ percussion drill
- M18 ONEID2 - M18 FUEL™ ONE-KEY™ 1/4" Hex impact driver



M18 ONEPP2A2-502X

| | |
|----------------|--|
| Kit included | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933464530 |

M18 FPP2A2 | M18 FUEL™ POWERPACK

- M18 FPD2 - M18 FUEL™ percussion drill
- M18 FID2 - M18 FUEL™ 1/4" Hex impact driver



M18 FPP2A2-502X

| | |
|----------------|--|
| Kit included | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933464269 |

M18 BLPP2A2 | M18™ BRUSHLESS POWERPACK

- M18 BLPD2 - M18™ brushless percussion drill
- M18 BLID2 - M18™ brushless 1/4" Hex impact driver



M18 BLPP2A2-502X

| | |
|----------------|--|
| Kit included | 2 x 5.0 Ah Battery packs, M12-18 FC Charger, HD Box |
| Article Number | 4933464523 |

M12

UPGRADE.
OUTWORK.
OUTLAST.



PORTABLE PRODUCTIVITY.
TRADE FOCUSED.
SYSTEM WIDE.

ONE SYSTEM
OVER
80
TOOLS

ONE KEY
UNLOCKING THE DIGITAL JOBSITE.

M12 FUEL

REDLITHIUM™ -ION

DRIVEN TO OUTPERFORM.™

M12 FUEL™ is engineered for the most demanding tradesmen in the world. M12 FUEL™ delivers extreme performance in a compact structure and features three MILWAUKEE® exclusive innovations - the POWERSTATE™ brushless motor, REDLITHIUM™-ION battery pack and REDLINK PLUS™ intelligence hardware and software - that deliver incredible power, run time and durability.

Simply put, M12 FUEL™ offers the best, full circle technology that drives, protects and powers your cordless tools.

NEW
MORE CAPABLE*

LIGHT WEIGHT*

MORE COMPACT*

1 POWERSTATE™ BRUSHLESS MOTOR

- Milwaukee Tool designed and built brushless motor
- Provides increased efficiency
- Lasts longer and delivers maximum power*



M12 FUEL™

DRIVEN TO OUTPERFORM.™



2 REDLINK PLUS™ INTELLIGENCE

- Individual cell monitoring to optimise tool run time and ensure long term pack durability
- Advanced system electronics with unique digital performance enhancement
- Total system communication with overload protection increases tool life

3 REDLITHIUM™-ION BATTERY PACKS

- Total system communication with overload protection increases tool life
- Fade-free performance to deliver more run time and more work over pack life
- Fuel gauge displays remaining charge
- Operates down to -20°C



REDLITHIUM™-ION 2.0 / 3.0 / 4.0 / 6.0Ah



M12

OVER **80** **M12** TOOLS

M12 CH

M12 FUEL™ SUB COMPACT SDS-PLUS HAMMER

- Industry's first brushless compact 12V rotary hammer with 1.1 Joules (EPTA), 0 - 6575 bpm & 0 - 900 rpm
- Exceptionally low vibration value 4.4 m/s² can be used for 8 hours in a day
- Will drill over 60 50 mm x 6 mm holes per battery charge
- Superior power to weight ratio in its class with brushless POWERSTATE™ motor for up to 3x longer motor life and up to 2x more run time
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- 2-mode operation: choose rotary hammer or rotation only for maximum versatility
- Optimised hammer drilling up to 6 - 10 mm (max 13 mm)
- 43 mm neck size - compatible with M12 DE dust extractor
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | M12 CH-0 | M12 CH-602X |
|--|---|---|
| Tool reception | SDS-Plus | SDS-Plus |
| Blow energy [EPTA][J] | 1.1 | 1.1 |
| Max. drilling wood (mm) | 13 | 13 |
| Max. drilling steel (mm) | 10 | 10 |
| Max. drilling concrete (mm) | 13 | 13 |
| Vibration drilling (m/s ²) | 4.4 | 4.4 |
| Weight with battery pack (kg) | - | 1.9 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 6.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933441947 | 4933451907 |

SET OF 5 SDS-PLUS DRILL BITS, Ø 5 / 6 X 110 MM AND Ø 6 / 8 / 10 X 160 MM

Article Number 4932352338



M12 FUEL



2 mode SDS-plus hammer



Exceptionally low vibration value 4.4 m/s²



LED light

M12 H | M12™ SUB COMPACT SDS-PLUS HAMMER

- Ergonomically designed, compact and light weight allows for work in tight spaces and reduces fatigue during all day use
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- L-shape, 2 mode hammer drill for hammer & rotary drilling for maximum versatility
- Low vibration at 6.7 m/s²
- Optimised hammer drilling up to 4 - 8 mm (max 13 mm)
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light - added user convenience and illumination in low lit working conditions
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | M12 H-0 | M12 H-402C |
|--|---|---|
| Tool reception | SDS-Plus | SDS-Plus |
| Blow energy [EPTA][J] | 0.9 | 0.9 |
| Max. drilling wood (mm) | 10 | 10 |
| Max. drilling steel (mm) | 8 | 8 |
| Max. drilling concrete (mm) | 13 | 13 |
| Vibration drilling (m/s ²) | 6.7 | 6.7 |
| Weight with battery pack (kg) | - | 1.8 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 4.0 Ah Battery packs, C12 C Charger, Kitbox |
| Article Number | 4933431355 | 4933443161 |

M12

M12 DE | M12™ UNIVERSAL HAMMER VAC

- Fits all MILWAUKEE® SDS-plus and the majority of competitor's drills between 43-59 mm neck size, supplied with side handle and 3 neck collars
- Will extract 65 x Ø6 mm by 50 mm deep holes per charge
- To be used with drill bits up to 160 mm length and max. Ø16 mm
- Multi functionality - can be used as a dedicated dust extraction as well as a hand held vac, right or left mounting
- HEPA filter: 99.7 % efficient
- Automatic 5 sec switch off time delay to ensure dust from drilled hole is completely cleaned
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | M12 DE-0C | M12 DE-201C |
|-------------------------------|--|--|
| Max. drill bit diameter [mm] | 4 - 16 | 4 - 16 |
| Max. drilling depth [mm] | 120 | 120 |
| Weight with battery pack (kg) | - | 1.7 |
| Kit included | No batteries supplied, No charger supplied, Kitbox | 1 x 2.0 Ah Battery pack, C12 C Charger, Kitbox |
| Article Number 12 V | 4933440510 | 4933451282 |

M12

M12 FPD

M12 FUEL™ SUB COMPACT PERCUSSION DRILL

- Brushless POWERSTATE™ motor delivers more power in a more compact size
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- 13 mm metal chuck for quick bit changes and bit retention
- Electronic clutch with 16 torque settings, plus 1 for locked clutch drilling and 1 for locked clutch hammer
- Fuel gauge displays remaining charge
- Bright LED workspace illumination
- Flexible battery system: works with all MILWAUKEE® M12™ batteries

| | M12 FPD-602X |
|-------------------------------|---|
| No load speed gear 1 (rpm) | 0 - 450 |
| No load speed gear 2 (rpm) | 0 - 1700 |
| Chuck capacity (mm) | 13 |
| Max. drilling wood (mm) | 35 |
| Max. drilling steel (mm) | 13 |
| Max. drilling masonry (mm) | 13 |
| Max. percussion rate (bpm) | 0 - 25,500 |
| Max. torque (Nm) | 44 |
| Weight with battery pack (kg) | 1.5 |
| Kit included | 2 x 6.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933459807 |



More power, more compact



13 mm metal chuck



Electronic clutch with 16 torque settings, plus 1 for locked clutch drilling and 1 for locked clutch hammer

M12 FUEL

M12 FDD | M12 FUEL™ SUB COMPACT DRILL DRIVER

- Brushless POWERSTATE™ motor delivers more power in a more compact size
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- 13 mm metal chuck for quick bit changes and bit retention
- Electronic clutch with 16 torque settings and plus 1 for locked clutch drilling
- Fuel gauge displays remaining charge
- Bright LED workspace illumination
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12 FUEL

| M12 FDD-602X | |
|-------------------------------|---|
| No load speed gear 1 (rpm) | 0 - 450 |
| No load speed gear 2 (rpm) | 0 - 1700 |
| Chuck capacity (mm) | 13 |
| Max. drilling wood (mm) | 35 |
| Max. drilling steel (mm) | 13 |
| Max. torque (Nm) | 44 |
| Weight with battery pack (kg) | 1.5 |
| Kit included | 2 x 6.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933459821 |

M12 FPDx | M12 FUEL™ SUB COMPACT PERCUSSION DRILL WITH REMOVABLE CHUCK

M12 FUEL

- High performance compact 6-in-1 percussion drill system for extreme versatility
- Removable chuck system with 3 different heads for multiples of applications
- Brushless POWERSTATE™ motor delivers up to 44 Nm of torque
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- 13 mm keyless chuck, full metal right angle 1/4" hex drive head and full metal offset 1/4" hex drive head
- 1/4" hex drive behind chuck fitting, reduces drill length to 138 mm when required
- Full metal planetary gearbox transmission for extreme durability
- LED light for workspace illumination
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| M12 FPDxKIT-602X | |
|-------------------------------|---|
| No load speed gear 1 (rpm) | 0 - 450 |
| No load speed gear 2 (rpm) | 0 - 1700 |
| Chuck capacity (mm) | 13 |
| Max. drilling wood (mm) | 35 |
| Max. drilling steel (mm) | 13 |
| Max. drilling masonry (mm) | 13 |
| Max. percussion rate (bpm) | 0 - 25,500 |
| Max. torque (Nm) | 44 |
| Weight with battery pack (kg) | 1.5 |
| Kit included | 2 x 6.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933464189 |

M12 FDDx

M12 FUEL™ INSTALLATION DRILL/DRIVER WITH INTERCHANGEABLE HEADS

- High performance compact 4-in-1 installation drill for extreme versatility
- Removable chuck system with 4 different heads for multiples of applications
- 1/4" hex drive behind chuck fitting, reduces drill length to 130 mm when required
- In-line grip for unrivaled access and control
- Brushless POWERSTATE™ motor delivers up to 34 Nm of torque
- Magnetic holder for easy bit access
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



NEW M12 FUEL



In-line grip



Magnetic holder for easy bit access



2-speed

| M12 FDDxKIT-202X | |
|-------------------------------|---|
| No load speed gear 1 (rpm) | 0 - 400 |
| No load speed gear 2 (rpm) | 0 - 1600 |
| Chuck capacity (mm) | 10 |
| Max. drilling wood (mm) | 28 |
| Max. drilling steel (mm) | 10 |
| Max. torque (Nm) | 34 |
| Weight with battery pack (kg) | 0.9 |
| Standard equipment | 10 mm metal chuck, right angle attachment, offset attachment and 6mm hex attachment |
| Kit included | 2 x 2.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933464980 |

SHOCKWAVE™ IMPACT DUTY BIT SET (32 PC)

Article Number 4932464240



M12 BDDx | M12™ SUB COMPACT DRILL DRIVER WITH REMOVABLE CHUCK

M12

- High performance sub compact 5-in-1 drill driver system for extreme versatility
- Removable chuck system with 3 different heads for multiples of applications
- Standard 10 mm keyless chuck, full metal right angle 1/4" hex drive head and full metal offset 1/4" hex drive head
- 1/4" hex drive behind chuck fitting, reduces drill length to 153 mm when required
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Full metal planetary gearbox transmission for extreme durability
- LED light for workspace illumination
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| M12 BDDxKIT-202C | |
|-------------------------------|---|
| No load speed gear 1 (rpm) | 0 - 400 |
| No load speed gear 2 (rpm) | 0 - 1500 |
| Chuck capacity (mm) | 10 |
| Max. drilling wood (mm) | 25 |
| Max. drilling steel (mm) | 10 |
| Max. torque (Nm) | 32 |
| Weight with battery pack (kg) | 1.2 |
| Kit included | 2 x 2.0 Ah Battery packs, C12 C Charger, Kitbox |
| Supplied in | Kitbox |
| Article Number | 4933447773 |

M12 BPD | M12™ SUB COMPACT PERCUSSION DRILL

M12

- High performance sub compact percussion drill measures 190 mm in length making it ideal for working within confined spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- 10 mm metal chuck for quick bit changes and bit retention
- Optimised handle for better control and improved grip
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light - added user convenience and illumination in low lit working conditions
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| M12 BPD-202C | |
|-------------------------------|---|
| No load speed gear 1 (rpm) | 0 - 400 |
| No load speed gear 2 (rpm) | 0 - 1500 |
| Chuck capacity (mm) | 10 |
| Max. drilling wood (mm) | 22 |
| Max. drilling steel (mm) | 10 |
| Max. drilling masonry (mm) | 10 |
| Max. percussion rate (bpm) | 22,500 |
| Max. torque (Nm) | 30 |
| Weight with battery pack (kg) | 1.2 |
| Kit included | 2 x 2.0 Ah Battery packs, C12 C Charger, Kitbox |
| Article Number | 4933443889 |

M12 BDD | M12™ SUB COMPACT DRILL DRIVER

- High performance sub compact drill driver measures 187 mm in length making it ideal for working within confined spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- 10 mm metal chuck for quick bit changes and bit retention
- Optimised handle for better control and improved grip
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light - added user convenience and illumination in low lit working conditions
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| M12 BDD-202C | |
|-------------------------------|---|
| No load speed gear 1 (rpm) | 0 - 400 |
| No load speed gear 2 (rpm) | 0 - 1500 |
| Chuck capacity (mm) | 10 |
| Max. drilling wood (mm) | 22 |
| Max. drilling steel (mm) | 10 |
| Max. torque (Nm) | 30 |
| Weight with battery pack (kg) | 1.2 |
| Kit included | 2 x 2.0 Ah Battery packs, C12 C Charger, Kitbox |
| Article Number | 4933443891 |



M12 BD | M12™ SUB COMPACT DRIVER

- High performance sub compact screw driver measures 175 mm in length making it ideal for working within confined spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- 1/4" Hex chuck for quick easy one handed bit change
- Optimised handle for better control and improved grip
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light - added user convenience and illumination in low lit working conditions
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| M12 BD-202C | |
|-------------------------------|---|
| No load speed gear 1 (rpm) | 0 - 400 |
| No load speed gear 2 (rpm) | 0 - 1500 |
| Tool reception | 1/4" Hex |
| Max. drilling wood (mm) | 22 |
| Max. drilling steel (mm) | 10 |
| Wood screws to (mm) | 6 |
| Max. torque (Nm) | 30 |
| Weight with battery pack (kg) | 1.0 |
| Kit included | 2 x 2.0 Ah Battery packs, C12 C Charger, Kitbox |
| Article Number | 4933443885 |



C12 RAD | M12™ SUB COMPACT RIGHT ANGLE DRILL

- Heavy Duty full metal gearbox and gears for superior durability and maximum torque
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Variable speed paddle switch trigger for comfortable working in any situation
- 10 mm chuck for quick bit changes and bit retention
- Electronic clutch with indicator light for complete control
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light - added user convenience and illumination in low lit working conditions
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | C12 RAD-0 | C12 RAD-202B |
|-------------------------------|---|---|
| No load speed (rpm) | 0 - 800 | 0 - 800 |
| Chuck capacity (mm) | 10 | 10 |
| Max. drilling wood (mm) | 22 | 22 |
| Max. drilling steel (mm) | 10 | 10 |
| Max. torque (Nm) | 12 | 12 |
| Weight with battery pack (kg) | - | 1.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 2.0 Ah Battery packs, C12 C Charger, Tool bag |
| Article Number | 4933416900 | 4933441218 |



M12 CD | M12 FUEL™ SUB COMPACT DRIVER

- Brushless POWERSTATE™ motor for up to 10x longer motor life, up to 2x more power and up to 2x more run time
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- 1/4" Hex chuck for quick easy one handed bit change
- Fuel gauge displays remaining charge
- Bright LED workspace illumination
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| M12 CD-202C | |
|-------------------------------|---|
| No load speed gear 1 (rpm) | 0 - 450 |
| No load speed gear 2 (rpm) | 0 - 1700 |
| Tool reception | 1/4" Hex |
| Max. drilling wood (mm) | 25 |
| Max. drilling steel (mm) | 10 |
| Max. torque (Nm) | 37 |
| Weight with battery pack (kg) | 1.2 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933440568 |



M12 FID

M12 FUEL™ SUB COMPACT 1/4" HEX IMPACT DRIVER

- Brushless POWERSTATE™ motor with faster speed in a more compact size of 130 mm
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- 4-Mode DRIVE CONTROL allows the user to shift to three different speed and torque settings, as well as a self-tapping mode to maximise application versatility
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- 1/4" Hex chuck for quick and easy bit change
- On board fuel gauge and LED light
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | M12 FID-0 | M12 FID-602X |
|-------------------------------|---|---|
| No load speed (rpm) | 0-1300 / 0-2400 / 0-3300 / 0-3300 | 0-1300 / 0-2400 / 0-3300 / 0-3300 |
| Tool reception | 1/4" Hex | 1/4" Hex |
| Impact rate (ipm) | 0 - 4000 | 0 - 4000 |
| Max. torque (Nm) | 147 | 147 |
| Weight with battery pack (kg) | - | 1.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 6.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933459822 | 4933464188 |



Compact, lightweight design



DRIVE CONTROL allows the user to shift into 4 different modes to best suit application



One handed bit insertion

M12 FQID

M12 FUEL™ SURGE™ 1/4" HEX HYDRAULIC IMPACT DRIVER

- The M12 FUEL™ SURGE™ 1/4" Hex hydraulic impact driver is Milwaukee Tool's quietest 12V impact driver, delivers best in class sound at only 76 dB(A) in wood fastening applications
- FLUID-DRIVE™ hydraulic powertrain reduces metal on metal contact within the tool, delivering quieter operation, smoother performance and increased durability over a standard impact
- 4-Mode DRIVE CONTROL allows the user to shift into four different speed and torque settings to maximise application versatility
- POWERSTATE™ brushless motor delivers up to 0 - 3,200 rpm with constant power output to drive screws faster
- REDLINK PLUS™ intelligence system delivers the most advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- 1/4" Hex chuck for quick and easy bit change
- Flexible battery system: works with all MILWAUKEE® M12™ batteries

| | M12 FQID-0 | M12 FQID-202X |
|-------------------------------|---|---|
| No load speed (rpm) | 1100/2200/3200/3200 | 1100/2200/3200/3200 |
| Tool reception | 1/4" Hex | 1/4" Hex |
| Impact rate (ipm) | 950/2200/3400/3400 | 950/2200/3400/3400 |
| Max. torque (Nm) | 50 | 50 |
| Weight with battery pack (kg) | - | 1.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 2.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933464972 | 4933464974 |



SURGE™
HYDRAULIC DRIVER

M12 FUEL



4-Mode DRIVE CONTROL



One-handed bit insert



1/4" Hex chuck

M12 BID | M12™ SUB COMPACT 1/4" HEX IMPACT DRIVER

- High performance sub compact impact driver measures 165 mm in length making it ideal for working within confined spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Heavy duty full metal gearbox and gears for superior durability and maximum torque
- 1/4" Hex chuck for quick and easy bit change
- Optimised handle for better control and improved grip
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light - added user convenience and illumination in low lit working conditions
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | M12 BID-0 | M12 BID-202C |
|-------------------------------|---|---|
| No load speed (rpm) | 0 - 2500 | 0 - 2500 |
| Impact rate (ipm) | 0 - 3300 | 0 - 3300 |
| Tool reception | 1/4" Hex | 1/4" Hex |
| Max. torque (Nm) | 112 | 112 |
| Weight with battery pack (kg) | - | 1.0 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 2.0 Ah Battery packs, C12 C Charger, Kitbox |
| Article Number | 4933441955 | 4933443895 |

M12

M12 BRAID | M12™ SUB COMPACT RIGHT ANGLE IMPACT DRIVER

M12

- Compact right angle impact driver measures 287 mm in length making it ideal for working within confined spaces
- REDLINK™ overload protection electronics delivers best in class system durability
- Full metal gearbox and gears for superior durability and maximum torque of 68 Nm
- Compact head design with diameter of 35.6 mm
- Multi-handle design for multiple hand positions and maximum comfort
- 1/4" Hex chuck for quick easy one handed bit change
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | M12 BRAID-0 |
|-------------------------------|---|
| No load speed (rpm) | 0 - 2425 |
| Impact rate (ipm) | 0 - 3300 |
| Tool reception | 1/4" Hex |
| Max. torque (Nm) | 68 |
| Weight with battery pack (kg) | 1.2 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933451247 |

M12 FIWF12

M12 FUEL™ SUB COMPACT 1/2" IMPACT WRENCH

M12 FUEL

- More power, more compact, more control
- Up to 339Nm of maximum torque
- 1/2" anvil with friction ring for quick and easy socket changes
- Brushless POWERSTATE™ motor delivers more power in a more compact size
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Better access in tight spaces with an overall length of only 124.5 mm
- 4-Mode DRIVE CONTROL with auto-shut off mode, offers the user precise control
- Bright LED workspace illumination
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



1/2" anvil with friction ring



Better access in tight spaces with an overall length of only 124.5 mm



4-Mode DRIVE CONTROL with auto-shut off mode

| | M12 FIWF12-0 | M12 FIWF12-622X |
|-------------------------------|---|---|
| No load speed (rpm) | 1200/1800/2700/2700 | 1200/1800/2700/2700 |
| Tool reception | 1/2" square | 1/2" square |
| Impact rate (ipm) | 1100/2100/3200 | 1100/2100/3200 |
| Max. torque (Nm) | 339 | 339 |
| Max. bolt diameter | M16 | M16 |
| Weight with battery pack (kg) | - | 1.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1x 6.0, 1 x 2.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933464615 | 4933464617 |



M12 FIW38 | M12 FUEL™ SUB COMPACT 3/8" IMPACT WRENCH

- More power, more compact, more control
- Up to 339 Nm of maximum torque
- 3/8" anvil with friction ring for quick and easy socket changes
- Brushless POWERSTATE™ motor delivers more power in a more compact size
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Better access in tight spaces with an overall length of only 121.9 mm
- 4-Mode DRIVE CONTROL with auto-shut off mode, offers the user precise control
- Bright LED workspace illumination
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12 FUEL

| | M12 FIW38-0 | M12 FIW38-622X |
|-------------------------------|---|---|
| No load speed (rpm) | 1200/1800/2700/2700 | 1200/1800/2700/2700 |
| Tool reception | 3/8" square | 3/8" square |
| Impact rate (ipm) | 1100/2100/3200 | 1100/2100/3200 |
| Max. torque (Nm) | 339 | 339 |
| Max. bolt diameter | M16 | M16 |
| Weight with battery pack (kg) | - | 1.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1x 6.0/1x 2.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933464612 | 4933464614 |

M12 FIW14 | M12 FUEL™ SUB COMPACT 1/4" IMPACT WRENCH

- More power, more compact, more control
- Up to 115 Nm of maximum fastening torque
- Up to 136 Nm of maximum nut busting torque
- 1/4" anvil with friction ring for quick and easy socket changes
- Brushless POWERSTATE™ motor delivers more power in a more compact size
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Better access in tight spaces with an overall length of only 129.5 mm
- 4-Mode DRIVE CONTROL with auto-shut off mode, offers the user precise control
- Bright LED workspace illumination
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12 FUEL

| | M12 FIW14-0 |
|-------------------------------|---|
| No load speed (rpm) | 1300/1900/3200/3200 |
| Tool reception | 1/4" square |
| Impact rate (ipm) | 1300/2000/4300 |
| Max. torque (Nm) | 136 |
| Max. bolt diameter | M12 |
| Weight with battery pack (kg) | 0.9 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933464611 |

M12 BIW12 | M12™ SUB COMPACT 1/2" IMPACT WRENCH

- High performance sub compact impact wrench measures 171 mm in length making it ideal for working within confined spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Heavy duty full metal gearbox and gears for superior durability and maximum torque
- 1/2" square drive with pin detent for use with universal sockets
- Optimised handle for better control and improved grip
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light - added user convenience and illumination in low lit working conditions
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12

| | M12 BIW12-0 | M12 BIW12-202C |
|-------------------------------|---|---|
| No load speed (rpm) | 0 - 2550 | 0 - 2550 |
| Tool reception | 1/2" square | 1/2" square |
| Impact rate (ipm) | 0 - 3400 | 0 - 3400 |
| Max. torque (Nm) | 138 | 138 |
| Weight with battery pack (kg) | - | 1.0 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 2.0 Ah Battery packs, C12 C Charger, Kitbox |
| Article Number | 4933447134 | 4933447187 |

M12 BIW38 | M12™ SUB COMPACT 3/8" IMPACT WRENCH

- High performance sub compact impact wrench measures 165 mm in length making it ideal for working within confined spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Heavy duty full metal gearbox and gears for superior durability and maximum torque
- 3/8" square drive with friction ring for use with universal sockets
- Optimised handle for better control and improved grip
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light - added user convenience and illumination in low lit working conditions
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12

| | M12 BIW38-0 | M12 BIW38-202C |
|-------------------------------|---|---|
| No load speed (rpm) | 0 - 2500 | 0 - 2500 |
| Tool reception | 3/8" square | 3/8" square |
| Impact rate (ipm) | 0 - 3300 | 0 - 3300 |
| Max. torque (Nm) | 135 | 135 |
| Weight with battery pack (kg) | - | 1.0 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 2.0 Ah Battery packs, C12 C Charger, Kitbox |
| Article Number | 4933441985 | 4933443899 |

M12 ONEFTR12

M12 FUEL™ ONE-KEY™ 1/2" DIGITAL TORQUE WRENCH

M12 FUEL

NEW

- Milwaukee Tool's first digital torque wrench, delivers up to 50% faster installation by replacing the hand tool
- Provides 16.9 - 203.4 Nm of torque range and accuracy within ±2% for torque critical fasteners
- Faster, more productive torque reporting with ONE-KEY™ providing torque data and customisable reports for inspectors or owners
- Adjustable run-down torque to control the tools output torque via the motor to prevent over torque
- Four measurement modes (ft-lb, in-lb, Nm, Kg-cm) and 15 available presets
- Durable design to withstand the most demanding jobsite environments
- Four notification modes that the tool is reaching, meeting or exceeding the torque target (audible, LED, LCD, and vibratory)
- Six pre-programmed languages including English, Spanish and French
- Integrates three MILWAUKEE®-exclusive technologies - the POWERSTATE™ brushless motor, REDLITHIUM™-ION battery pack and REDLINK PLUS™ intelligence hardware and software - which deliver outstanding power, run time and durability on the jobsite
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



ONE-KEY™
UNLOCKING THE DIGITAL JOBSITE.



Replacing the hand tool or two tool installation process



Faster, more productive torque reporting with ONE-KEY™



15 available torque presets

| | M12 ONEFTR12-0C | M12 ONEFTR12-201C |
|-------------------------------|--|--|
| Torque range [Nm] | 16.9 - 203.4 | 16.9 - 203.4 |
| Accuracy | CW ±2 %, CCW ±3% | CW ±2 %, CCW ±3% |
| Tool reception | 1/2" square | 1/2" square |
| No load speed (rpm) | 0 - 100 | 0 - 100 |
| Weight with battery pack (kg) | - | 2.6 |
| Kit included | No batteries supplied, No charger supplied, Kitbox | 1 x 2.0 Ah Battery pack, C12 C Charger, Kitbox |
| Article Number | 4933464969 | 4933464971 |

1/2" SHOCKWAVE™ IMPACT DUTY SOCKET SET (10 PC)

Article Number **4932352861**



M12 ONEFTR38 | M12 FUEL™ ONE-KEY™ 3/8" DIGITAL TORQUE WRENCH **NEW** **ONE-KEY** UNLOCKING THE DIGITAL JOBSITE. **M12 FUEL**

- Milwaukee Tool's first digital torque wrench, delivers up to 50% faster installation by replacing the hand tool
- Provides 13.6 - 135.6 Nm of torque range and accuracy within ±2% for torque critical fasteners
- Faster, more productive torque reporting with ONE-KEY™ providing torque data and customisable reports for inspectors or owners
- Adjustable run-down torque to control the tools output torque via the motor to prevent over torque
- Four measurement modes (ft-lb, in-lb, Nm, Kg-cm)
- Durable design to withstand the most demanding jobsite environments
- Four notification modes that the tool is reaching, meeting or exceeding the torque target (audible, LED, LCD, and vibratory)
- Six pre-programmed languages including English, Spanish and French
- Integrates three MILWAUKEE®-exclusive technologies - the POWERSTATE™ brushless motor, REDLITHIUM™-ION battery pack and REDLINK PLUS™ intelligence hardware and software - which deliver outstanding power, run time and durability on the jobsite
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | M12 ONEFTR38-0C | M12 ONEFTR38-201C |
|-------------------------------|--|--|
| Torque range (Nm) | 13.6 - 135.6 | 13.6 - 135.6 |
| Accuracy | CW ±2 %, CCW ±3% | CW ±2 %, CCW ±3% |
| Tool reception | 3/8" square | 3/8" square |
| No load speed (rpm) | 0 - 100 | 0 - 100 |
| Weight with battery pack (kg) | - | 2.5 |
| Kit included | No batteries supplied, No charger supplied, Kitbox | 1 x 2.0 Ah Battery pack, C12 C Charger, Kitbox |
| Article Number | 4933464966 | 4933464968 |

M12 FIR38LR

M12 FUEL™ 3/8" EXTENDED REACH RATCHET

- With up to 75 Nm of max torque and 200 rpm's, this tool is the ideal fastening solution for automotive mechanics, maintenance and repair professionals
- The industry leading FUEL™ technology combined with a reinforced mechanism and investment cast steel yoke housing provides greater durability for the professional user
- Extended reach ratchet adding additional 82 mm of length for access into tight spaces
- Variable speed trigger provides ultimate control of the tool
- Premium rubber overmold withstands corrosive materials and provides increased comfort when in use
- The LED light illuminates the work area while the on-board fuel gauge displays remaining run time
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Supplied with 1/4" adaptor
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| M12 FIR38LR-0 | |
|-------------------------------|---|
| Tool reception | 3/8" square |
| Max. torque (Nm) | 75 |
| No load speed (rpm) | 0 - 200 |
| Length (mm) | 363 |
| Weight with battery pack (kg) | 1.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933471500 |

M12 FUEL

NEW



Additional 82 mm of length



Lock switch



LED light

M12 FIR14LR | M12 FUEL™ 1/4" EXTENDED REACH RATCHET

- With up to 54 Nm of max torque and 250 rpm's, this tool is the ideal fastening solution for automotive mechanics, maintenance and repair professionals
- The industry leading FUEL™ technology combined with a reinforced mechanism and investment cast steel yoke housing provides greater durability for the professional user
- Extended reach ratchet adding additional 82 mm of length for access into tight spaces
- Variable speed trigger provides ultimate control of the tool
- Premium rubber overmold withstands corrosive materials and provides increased comfort when in use
- The LED light illuminates the work area while the on-board fuel gauge displays remaining run time
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Supplied with 3/8" adaptor



NEW **M12 FUEL**

| M12 FIR14LR-0 | |
|-------------------------------|---|
| Tool reception | 1/4" square |
| Max. torque (Nm) | 54 |
| No load speed (rpm) | 0 - 250 |
| Length (mm) | 348 |
| Weight with battery pack (kg) | 1.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933471499 |

M12 FIR12 | M12 FUEL™ SUB COMPACT 1/2" RATCHET

- With up to 81 Nm of max torque and 175 rpm's, this tool is the ideal fastening solution for automotive mechanics, maintenance and repair professionals
- Low profile head design allows users better access in tight spaces
- The industry leading FUEL™ technology combined with a reinforced mechanism and investment cast steel yoke housing provides greater durability for the professional user
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Variable speed metal trigger provides ultimate control of the tool
- Premium rubber overmold withstands corrosive materials and provides increased comfort when in use
- The LED light illuminates the work area while the on-board fuel gauge displays remaining run time
- Supplied with 3/8" adaptor
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12 FUEL

| M12 FIR12-0 | |
|-------------------------------|---|
| Tool reception | 1/2" square |
| Max. torque (Nm) | 81 |
| No load speed (rpm) | 0 - 175 |
| Length (mm) | 290 |
| Weight with battery pack (kg) | 1.5 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459800 |

M12 FIR38 | M12 FUEL™ SUB COMPACT 3/8" RATCHET

- With up to 75 Nm of max torque and 200 rpm's, this tool is the ideal fastening solution for automotive mechanics, maintenance and repair professionals
- Low profile head design allows users better access in tight spaces
- The industry leading FUEL™ technology combined with a reinforced mechanism and investment cast steel yoke housing provides greater durability for the professional user
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Variable speed metal trigger provides ultimate control of the tool
- Premium rubber overmold withstands corrosive materials and provides increased comfort when in use
- The LED light illuminates the work area while the on-board fuel gauge displays remaining run time
- Supplied with 1/4" adaptor
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12 FUEL

| | M12 FIR38-0 | M12 FIR38-201B |
|-------------------------------|---|--|
| Tool reception | 3/8" square | 3/8" square |
| Max. torque (Nm) | 75 | 75 |
| No load speed (rpm) | 0 - 200 | 0 - 200 |
| Length (mm) | 281 | 281 |
| Weight with battery pack (kg) | - | 1.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1 x 2.0 Ah Battery pack, C12 C Charger, Tool bag |
| Article Number | 4933459797 | 4933459799 |

M12 FIR14 | M12 FUEL™ SUB COMPACT 1/4" RATCHET

- With up to 54 Nm of max torque and 250 rpm's, this tool is the ideal fastening solution for automotive mechanics, maintenance and repair professionals
- Low profile head design allows users better access in tight spaces
- The industry leading FUEL™ technology combined with a reinforced mechanism and investment cast steel yoke housing provides greater durability for the professional user
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Variable speed metal trigger provides ultimate control of the tool
- Premium rubber overmold withstands corrosive materials and provides increased comfort when in use
- The LED light illuminates the work area while the on-board fuel gauge displays remaining run time
- Supplied with 3/8" adaptor
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12 FUEL

| | M12 FIR14-0 | M12 FIR14-201B |
|-------------------------------|---|--|
| Tool reception | 1/4" square | 1/4" square |
| Max. torque (Nm) | 54 | 54 |
| No load speed (rpm) | 0 - 250 | 0 - 250 |
| Length (mm) | 266 | 266 |
| Weight with battery pack (kg) | - | 1.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1 x 2.0 Ah Battery pack, C12 C Charger, Tool bag |
| Article Number | 4933459795 | 4933459901 |

M12 IR | M12™ SUB COMPACT RATCHET

- Pneumatic performance with cordless convenience, 47 Nm of torque and no load speed of 250 rpm
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Reinforced housing - provides high durability similar to steel ratchets
- Compact design - ideal for tight spaces and small engine bays
- Variable speed metal paddle switch trigger - provides greater user control during application
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light - added user convenience and illumination in low lit working conditions
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12

| | M12 IR-201B 1/4 | M12 IR-201B 3/8 |
|-------------------------------|--|--|
| Tool reception | 1/4" square | 3/8" square |
| Max. torque (Nm) | 40 | 47 |
| No load speed (rpm) | 0 - 250 | 0 - 250 |
| Length (mm) | 274 | 274 |
| Weight with battery pack (kg) | 0.9 | 0.9 |
| Kit included | 1 x 2.0 Ah Battery pack, C12 C Charger, Tool bag | 1 x 2.0 Ah Battery pack, C12 C Charger, Tool bag |
| Article Number | 4933451019 | 4933448110 |

M12 SI | M12™ SUB COMPACT SOLDERING IRON

- Quick heat up time: the tool is ready to use in 20 - 30 seconds
- 3 locking head positions to work in multiple orientations - 0°, 45°, 90°
- Tool free replaceable tips
- Dual color LED lights to notify user: flashing green when tool is heating up, solid green when the tool is ready for operation and solid red when the tool is off but the tip is hot to touch until the red LED turns off
- Temperature monitoring to maintain heat throughout tough applications
- Bright LED light for increased visibility of soldering application
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12

| | M12 SI-0 | M12 SI-201C |
|-------------------------------|---|--|
| Heater power [W] | 90 | 90 |
| Temperature range (°C) | 400 | 400 |
| Weight with battery pack (kg) | - | 0.5 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1 x 2.0 Ah Battery pack, C12 C Charger, Kitbox |
| Article Number | 4933459760 | 4933459762 |

M12 BI | M12™ SUB COMPACT INFLATOR

- Compact lightweight design for fast inflation of car, light truck and compact equipment tires
- High efficiency motor & pump
- Anti-vibration stand with all rubber feet for no movement while inflating
- Auto shut-off technology inflates to users pre-selected pressure for highly accurate inflation
- Illuminated LCD display with a digital pressure and fuel gauge that displays remaining charge
- Nozzle & hose storage, easily stores 66 cm hose and attachments, with an all-brass schrader chuck
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life (Battery sold separately)
- Flexible battery system: works with all MILWAUKEE® M12™ batteries
- Supplied with a ball inflation needle, presta chuck, inflator nozzle and schrader chuck



M12

| | M12 BI-0 |
|-------------------------------|---|
| Hose length (mm) | 660 |
| Max. pressure | 8.27 / 120 |
| No load air delivery | 24.9 |
| Duty Cycle | 50% at 10 min On and 10 min Off |
| Gauge Accuracy (%) | ±3% |
| Weight with battery pack (kg) | 1.6 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933464124 |

M12 CHZ | M12 FUEL™ SUB COMPACT HACKZALL™

- Brushless POWERSTATE™ motor for up to 6x longer motor life and up to 70% faster cutting in certain applications
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Patented FIXTEC™ clamp for fast and easy keyless blade change
- Counter balance mechanism lowers vibration to 6.5 m/s² allowing the operator to work safely for longer periods of time reducing fatigue
- Sealed gearbox prevents water and debris entering the housing
- LED light illuminates the cutline in low light conditions
- Compact and light weight allows users to complete applications in restricted areas
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12 FUEL

| | M12 CHZ-0 | M12 CHZ-602X |
|-------------------------------|---|---|
| No load stroke rate (spm) | 0 - 3000 | 0 - 3000 |
| Stroke length (mm) | 15.9 | 15.9 |
| Weight with battery pack (kg) | - | 1.6 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 6.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933446960 | 4933451908 |

HACKZALL™ BLADE SET (10 PCS);
2 X 49005460, 3 X 49005614, 3 X 49005424, 2 X 49005418

Article Number 49220220



C12 HZ | M12™ SUB COMPACT HACKZALL™

- High performance compact one handed use HACKZALL™, measuring only 280 mm in length, making it ideal for working within confined spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Patented FIXTEC™ clamp for fast and easy keyless blade change
- Low vibration at 10.5 m/s²
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light - added user convenience and illumination in low lit working conditions
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12

| | C12 HZ-0 | C12 HZ-202C |
|-------------------------------|---|---|
| No load stroke rate (spm) | 0 - 3000 | 0 - 3000 |
| Stroke length (mm) | 13 | 13 |
| Weight with battery pack (kg) | - | 1.2 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 2.0 Ah Battery packs, C12 C Charger, Kitbox |
| Article Number | 4933411925 | 4933441198 |

HACKZALL™ BLADE SET (10 PCS);
2 X 49005460, 3 X 49005614, 3 X 49005424, 2 X 49005418

Article Number 49220220



M12 CCS44 | M12 FUEL™ SUB COMPACT CIRCULAR SAW

- Brushless POWERSTATE™ motor for up to 2x longer motor life and up to 2x more cuts per charge
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- 50° bevel capacity
- Magnesium upper and lower guards provide best in class durability for impact resistance
- Magnesium shoe reduces weight and maximises durability
- Integrated dust blower keeps cut line clear
- LED light illuminates the cut line
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12 FUEL

| | M12 CCS44-0 | M12 CCS44-602X |
|-------------------------------|---|---|
| No load speed (rpm) | 3600 | 3600 |
| Max. cutting depth 90° (mm) | 44 | 44 |
| Max. cutting depth 45° (mm) | 33 | 33 |
| Blade diameter (mm) | 140 | 140 |
| Bore size (mm) | 20 | 20 |
| Weight with battery pack (kg) | - | 2.7 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 6.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933448225 | 4933451909 |

M12 JS | M12™ SUB COMPACT JIGSAW

- New grip design combines the best features from both top handle and barrel grip jigsaw design
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Variable speed - electronic trigger provides user flexibility and control
- Smooth cut - minimal vibration during cutting provides ultra smooth performance
- Precision roller guide increases user control and reduces blade deflection
- Line of sight - the compact tool design improves cut line visibility
- Tool free bevel facility - quick and easy bevel adjustment up to 45°
- QUIK-LOK™ T-Shank blade clamp
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries
- Non marking shoe comes as standard to protect work surfaces from scratching



M12

| | M12 JS-0 | M12 JS-402B |
|-------------------------------|---|---|
| No load stroke rate (spm) | 0 - 2800 | 0 - 2800 |
| Stroke length (mm) | 19 | 19 |
| Weight with battery pack (kg) | - | 2.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 4.0 Ah Battery packs, C12 C Charger, Tool bag |
| Article Number | 4933431305 | 4933441703 |

75 X 2.5 MM T 101 B JIGSAW BLADE, 5 PCS

| | |
|----------------|------------|
| Article Number | 4932254061 |
|----------------|------------|



M12 BST | M12™ SUB COMPACT STAPLER

- Breakthrough performance limits user fatigue by eliminating the repetitive motion of hand tools
- Ready to Fire Technology eliminates ramp-up time between each staple discharge
- Bump fire and sequential fire operation allows the user to fire quickly and accurately
- 2000 staples fired with one 2.0 Ah battery pack
- Fires standard T50 staples from 6 to 14 mm
- Dry-Fire lock out stops the stapler from being fired when empty
- Compact length, height and width for easier access to compact spaces
- Adjustable belt hook for user convenience
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



M12

| | M12 BST-0 |
|-------------------------------|---|
| Staple strip | T50 |
| Staple strip width (mm) | 11.4 |
| Staple strip length (mm) | 6 - 14 |
| Magazine capacity | 89 |
| Cycle rate [min] | 140 |
| Weight with battery pack (kg) | - |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459634 |

T50 0.5 X 1.27 MM STAPLES, 6 MM TOTAL LENGTH

| | |
|----------------|------------|
| Article Number | 4932459145 |
|----------------|------------|



M12 BPRT

M12™ SUB COMPACT RIVET TOOL

- Up to 325 x 4.8 mm stainless steel rivets on a single charge with a 2.0 Ah battery pack
- Suitable for all aluminium, steel, stainless steel and copper rivets up to 4.8 mm
- Rivets in one stroke with a 20.32 mm stroke length
- Retention nose pieces hold rivets in any orientation
- Tool-free access to easily clean jaws. On-board nose piece storage and removal tool for user convenience
- On board fuel gauge and LED light for added user convenience and illumination in low lit working conditions
- Ergonomic design with 273 mm H x 66.8 mm W x 165 mm in length without mandrel collector
- Integrated belt hook and lanyard tie off point
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries
- Supplied with 4 x retaining tips



| | M12 BPRT-0 | M12 BPRT-201X |
|--|---|--|
| Max. pulling force [N] | 9000 | 9000 |
| Max. rivets popped with M12 B2 battery | 325 x 4.8 | 325 x 4.8 |
| Rivet diameter range [mm] | 2.4 - 4.8 | 2.4 - 4.8 |
| Stroke length (mm) | 20.32 | 20.32 |
| Dimensions (mm) | 273 x 66 x 8 x 230 | 273 x 66 x 8 x 230 |
| Weight with battery pack (kg) | - | 2.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1 x 2.0 Ah Battery pack, C12 C Charger, HD Box |
| Article Number | 4933464404 | 4933464406 |

152 MM NOSE EXTENSION KIT FOR M12™ RIVET TOOL

| | |
|----------------|----------|
| Article Number | 48950100 |
|----------------|----------|



Retention nose pieces hold rivets in any orientation



On-board nose piece storage and removal tool for user convenience



Integrated belt hook and lanyard tie off point

C12 PN | M12™ SUB COMPACT PALM NAILER

- Professional power effectively drives 100 mm framing nails in less than 3 seconds
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Superior ergonomics – user-preferred palm style grip provides outstanding comfort and control
- Fits into locations where a hammer cannot be swung
- Increased run time: drives up to 100 x 90 mm nails on a single charge
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | C12 PN-0 |
|-------------------------------|---|
| Max. percussion rate (bpm) | 2700 |
| Max. nail size (mm) | 90 |
| Weight with battery pack (kg) | 1.6 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933427182 |

C12 MT | M12™ SUB COMPACT MULTI-TOOL

- Versatile cordless solution for cutting and removal applications
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Variable speed (5000 - 20,000 rpm) and 1.5° left/right oscillation movement allows quick completion of professional applications into materials such as metal, wood and plastic
- Will accept competitor accessories
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries
- Supplied with an adapter, plunge cut blade OSC 112, sanding backing pad, 5 x sanding sheets



| | C12 MT-0 | C12 MT-402B |
|-----------------------------------|---|---|
| Oscillation angle left/ right (°) | 1.5 | 1.5 |
| No load speed (rpm) | 5000 - 20,000 | 5000 - 20,000 |
| Weight with battery pack (kg) | - | 1.2 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 4.0 Ah Battery packs, C12 C Charger, Tool bag |
| Article Number | 4933427180 | 4933441708 |

32 MM PLUNGE CUT BLADE. PLUNGE / RECESS / FLUSH CUTTING IN WOOD AND PVC

Article Number 48900030



C12 RT | M12™ SUB COMPACT ROTARY TOOL

- Versatile cordless solution for cutting and removal applications
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Variable speed (5000 - 32,000 rpm)
- 3.2 mm collet fits most current accessories in the market
- Spindle lock mechanism for easy accessory changes
- Superior ergonomics and lightweight
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | C12 RT-0 |
|-------------------------------|---|
| No load speed (rpm) | 5000 - 32,000 |
| Collet capacity (mm) | 3.2 |
| Weight with battery pack (kg) | 0.6 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933427183 |

M12 BS | M12™ SUB COMPACT BANDSAW

- Compact light weight design for cutting with one hand overhead in existing installations and in tight spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Cuts a multitude of materials: steel, stainless steel, copper, plastic, aluminium
- Cold cutting - spark and burr free
- Clean cut - balanced handle design combined with 8-large ball bearing blade supports provide best in class cut quality
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries
- Supplied with a 18 Tpi blade



| | M12 BS-0 | M12 BS-402C |
|-------------------------------|---|---|
| No load speed (rpm) | 0 - 85 | 0 - 85 |
| Max. cutting capacity (mm) | 41 x 41 | 41 x 41 |
| Blade length (mm) | 687.57 | 687.57 |
| Weight with battery pack (kg) | - | 3.2 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 4.0 Ah Battery packs, C12 C Charger, Kitbox |
| Article Number | 4933431310 | 4933446135 |

M12 FCOT | M12 FUEL™ SUB COMPACT MULTI-MATERIAL CUT-OFF TOOL

- Fast accurate cutting with up to 20,000 RPM
- Optimised ergonomic design for best control and one-handed use. Only 1.1 kg and 226 mm in length
- Multi-material cutting capability with variety of blades available (metal cut-off wheel, carbide abrasive blade and diamond tile blade)
- A very capable problem solving tool for cutting steel, stainless steel, non-ferrous materials, drywall, fibre cement, plastic and ceramics
- Easily adjustable guard and unique forward/reverse selectable blade rotation direction to protect user from debris in various cutting positions
- Quick release dust shoe with depth adjustment and optional dust extraction port
- Brushless POWERSTATE™ motor delivers more power in a more compact size
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life



| | M12 FCOT-0 | M12 FCOT-622X |
|-------------------------------|---|--|
| No load speed (rpm) | 20,000 | 20,000 |
| Cutting depth (mm) | 16.3 | 16.3 |
| Disc diameter (mm) | 76 | 76 |
| Bore size (mm) | 10 | 10 |
| Weight with battery pack (kg) | - | 1.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1 x 2.0/ 1 x 6.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933464618 | 4933464620 |

M12 FDGA

M12 FUEL™ ANGLED DIE GRINDER

- The first cordless right angle die grinder that delivers more power vs. pneumatic models
- Best-in-class size (only 119 mm long) to help fit in tight places, and offers greater mobility and access
- Features a 4-mode speed control and responsive variable speed trigger enabling outstanding control
- To be used with discs up to Ø50 mm
- Supplied with 6 and 8 mm collets
- Integrates three MILWAUKEE®-exclusive technologies - the POWERSTATE™ brushless motor, REDLITHIUM™-ION battery pack and REDLINK PLUS™ intelligence hardware and software - which deliver outstanding power, run time and durability on the jobsite
- Flexible battery system: works with all MILWAUKEE® M12™ batteries




Compact size



4-Mode speed control



To be used with discs up to Ø50 mm

| | M12 FDGA-0 | M12 FDGA-422B |
|-------------------------------|---|--|
| Collet capacity (mm) | 6 & 8 | 6 & 8 |
| Disc diameter (mm) | 50 | 50 |
| No load speed (rpm) | 0 - 10,000/ 0 - 15,000/ 0 - 20,000/ 0 - 24,500 | 0 - 10,000/ 0 - 15,000/ 0 - 20,000/ 0 - 24,500 |
| Weight with battery pack (kg) | - | 0.8/ 1.0 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1 x 2.0/ 1 x 4.0 Ah Battery packs, C12 C Charger, Tool bag |
| Article Number | 4933471438 | 4933471440 |

M12 BPS | M12™ SUB COMPACT POLISHER / SANDER

- Variable 2 speed selection (0-2800 / 0-8300 RPM) for both polishing and sanding applications
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Large capacity of 76 mm polishing sponge and 50 mm sanding pad size for fast job completion
- Long run time allows frequent task completion with one battery charge
- Compact design with only 130 mm allows access to hard areas
- Spindle lock allows fast, tool free accessory change
- Detachable 2 position side handle
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries
- Supplied with polishing pad, sanding pad, polishing sponge white, polishing sponge yellow, lambswool, side handle



| | M12 BPS-0 | M12 BPS-421X |
|-------------------------------|---|--|
| No load speed gear 1 (rpm) | 0 - 2800 | 0 - 2800 |
| No load speed gear 2 (rpm) | 0 - 8300 | 0 - 8300 |
| Disc diameter (mm) | 76 | 76 |
| Spindle size | M9 x 0.75 | M9 x 0.75 |
| Weight with battery pack (kg) | - | 1.0 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1 x 2.0/ 1 x 4.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933447791 | 4933447802 |

M12 HV | M12™ SUB COMPACT STICK VAC

- Excellent suction power for wood, metal and common debris
- Clear viewing window gives the user the ability to see debris build up
- Lock on switch reduces fatigue during sustained use
- Versatile accessories for small or large clean up areas
- Compact design makes it easy to clean in tight spaces
- Secure canister lock guards against unwanted spillage
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | M12 HV-0 |
|-------------------------------|---|
| Air volume (l/min) | 934 |
| Airflow speed [m per h] | 56 |
| Max. vacuum (mbar) | 31.1 |
| Capacity solids (l) | 0.6 |
| Hose diameter (mm) | 22.5 |
| Weight with battery pack (kg) | 1.2 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933448390 |

M12 GG | M12™ SUB COMPACT GREASE GUN

- Powerful 12 V motor delivers over 562 bar max operating pressure
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Best in class run time - dispenses up to 7 cartridges per charge
- Superior handle balance and ergonomics - only 355 mm long and 3.2 kg
- Air bleeder valve - priming mechanism for quick flow
- Integrated hose storage & shoulder strap loop - added user convenience and less down time
- Three way loading - bulk, cartridge and suction capable
- Grease capacity 400 ml cartridge, 473 ml bulk
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries
- Supplied with 914 mm x 14.4 mm high pressure flex hose with spring guard and grease coupler



| | M12 GG-0 |
|-------------------------------|---|
| Pressure (bar) | 562 |
| Weight with battery pack (kg) | - |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933440435 |

M12 PCG/310 | M12™ SUB COMPACT CAULK GUN WITH 310 ML CARTRIDGE HOLDER

- Up to 1780 N of force
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Optimised performance with all construction adhesives and cool temperatures
- Anti-drip feature prevents unwanted dripping when trigger is released
- Dial control with 6 speed settings allows for maximum bead control
- Large robust plunger design ensures constant flow, reduces blow back and expels all sealant from cartridge
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | M12 PCG/310C-201B |
|-------------------------------|--|
| Max. pushing force (N) | 1780 |
| Speed settings | 6 |
| Standard equipment | 310 ml cart. holder |
| Weight with battery pack (kg) | 1.9 |
| Kit included | 1 x 2.0 Ah Battery pack, C12 C Charger, Tool bag |
| Article Number | 4933448763 |

M12 PCG/400 | M12™ SUB COMPACT CAULK GUN WITH 400 ML TUBE

- Up to 1780 N of force
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Optimised performance with all construction adhesives and cool temperatures
- Anti-drip feature prevents unwanted dripping when trigger is released
- Dial control with 6 speed settings allows for maximum bead control
- Large robust plunger design ensures constant flow, reduces blow back and expels all sealant from cartridge
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | M12 PCG/400A-201B |
|-------------------------------|--|
| Max. pushing force (N) | 1780 |
| Speed settings | 6 |
| Standard equipment | 400 ml alum. tube |
| Weight with battery pack (kg) | 1.9 |
| Kit included | 1 x 2.0 Ah Battery pack, C12 C Charger, Tool bag |
| Article Number | 4933451225 |

M12 PCG/600 | M12™ SUB COMPACT CAULK GUN WITH 600 ML TUBE

- Up to 1780 N of force
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Optimised performance with all construction adhesives and cool temperatures
- Anti-drip feature prevents unwanted dripping when trigger is released
- Dial control with 6 speed settings allows for maximum bead control
- Large robust plunger design ensures constant flow, reduces blow back and expels all sealant from cartridge
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining charge
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | M12 PCG/600A-201B |
|-------------------------------|--|
| Max. pushing force (N) | 1780 |
| Speed settings | 6 |
| Standard equipment | 600 ml alum. tube |
| Weight with battery pack (kg) | 1.9 |
| Kit included | 1 x 2.0 Ah Battery pack, C12 C Charger, Tool bag |
| Article Number | 4933448764 |

C12 PC

M12™ SUB COMPACT COPPER PIPE CUTTER

- High performance 500 rpm motor cuts 12 mm copper pipe in less than 3 seconds
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- Auto locking cut mechanism cuts installed copper tubing with as little as 37 mm clearance
- Auto adjusting jaws – automatically adjust to pipe size
- All metal sealed front end – rust and corrosion resistant cut head
- Slimline soft grip handle
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- On board fuel gauge and LED light - added user convenience and illumination in low lit working conditions
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| C12 PC-0 | |
|-------------------------------------|---|
| copper tubes (mm) | 12, 15, 18, 22, 25, 28 |
| Minimum space for tube cutting (mm) | 80 |
| Length (mm) | 360 |
| Weight with battery pack (kg) | 1.5 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933411920 |

PIPE CUTTER WHEELS. SUITABLE FOR COPPER PIPE. NOT SUITABLE FOR PLASTIC OR STAINLESS STEEL PIPE

Article Number **48380010**



Slimline soft grip handle



Cuts 12 mm copper pipe in less than 3 seconds



Auto adjusting jaws

C12 JSR | M12™ SUB COMPACT RADIO WITH MP3 PLAYER CONNECTION



- Advanced technology tuner for high reception and clarity
- Powers from either M12™ battery or 230 V mains supply
- At least 8 hour run time on a M12™ MILWAUKEE® battery
- Weather sealed auxiliary compartment protects Mp3 players and other audio devices
- Digital display tuner for accurate signal selection
- Mute button for instant volume kill
- 220 - 240 V power adapter, 3.5 mm jack plug for auxiliary connection, i.e: iPods
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| C12 JSR-0 | |
|------------------|---|
| Voltage (DC) (V) | 12 |
| Voltage (AC) (V) | 220-240 |
| Battery type | Li-ion |
| Dimensions (mm) | 267 x 102 x 178 |
| Weight (kg) | 1.8 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933416373 |

M12 JSSP | M12™ JOBSITE BLUETOOTH® SPEAKER



- Advanced technology Bluetooth® jobsite speaker
- Connect wirelessly with portable electronic devices from up to 10 m away
- Loud, clear sound at all volumes
- Premium speaker with bass port
- Drop, water and debris resistant to withstand tough conditions on and off the jobsite
- Rugged over mould, metal speaker grill
- 2.1 A USB charger, charges phones, tablets and media players
- Up to 25 hrs run time per charge with M12™ 4.0 Ah battery
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| M12 JSSP-0 | |
|--------------------|---|
| Dimensions (mm) | 105.5 x 153 |
| Speaker output (W) | 5 |
| Weight (kg) | 0.5 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933446380 |

M12-18 JSSP | M12™ - M18™ BLUETOOTH® SPEAKER



- Advanced technology Bluetooth® jobsite speaker
- Bluetooth® wireless range of up to 30 m
- Flexible battery system: works with all MILWAUKEE® M12™ & M18™ batteries
- IP54 rated, water and debris resistant to withstand tough conditions on and off the jobsite
- Loud, clear sounds at all volumes
- 2.1A USB charger, charges phones, tablets and media players
- Premium speaker with bass port



| M12-18 JSSP-0 | |
|-------------------------------|---|
| Dimensions (mm) | 360 x 165 x 165 |
| Speaker output (W) | 40 |
| Weight with battery pack (kg) | 2.3 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459275 |

M12 FPP2A

M12 FUEL™ POWERPACK

M12 FUEL

- M12 FPD - M12 FUEL™ sub compact percussion drill
- M12 FID - M12 FUEL™ sub compact 1/4" Hex impact driver



M12 FPP2A-602X

| | |
|----------------|---|
| Kit included | 2 x 6.0 Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933459811 |

M12 FPP2AQ | M12 FUEL™ POWERPACK

M12 FUEL

- M12 FPD - M12 FUEL™ sub compact percussion drill
- M12 FQID - M12 FUEL™ SURGE™ 1/4" Hex hydraulic impact driver



M12 FPP2AQ-202X

| | |
|----------------|--|
| Kit included | 2 x 2.0Ah Battery packs, C12 C Charger, HD Box |
| Article Number | 4933464977 |

M12 SET1F | M12 FUEL™ POWERPACK

M12 FUEL

- M12 CD - M12 FUEL™ sub compact driver
- 33pc Shockwave Impact Duty™ set
- 5m metric/imperial tape measure



M12 SET1F-202B

| | |
|----------------|---|
| Kit included | 2 x 2.0 Ah Battery packs, C12 C Charger, Tool bag |
| Article Number | 4933471686 |

M12 BPP4A | M12™ POWERPACK

M12

- M12 BDD - M12™ sub compact drill driver
- M12 BID - M12™ sub compact 1/4" Hex impact driver
- C12 HZ - M12™ hackzall™
- C12 T - M12™ lamp



M12 BPP4A-202B

| | |
|----------------|---|
| Kit included | 2 x 2.0 Ah Battery packs, C12 C Charger, Tool bag |
| Article Number | 4933446605 |

M12 BPP2B | M12™ POWERPACK

M12

- M12 BPD - M12™ sub compact percussion drill
- M12 BID - M12™ sub compact impact driver



M12 BPP2B-421C

| | |
|----------------|--|
| Kit included | 1 x 2.0/ 1 x 4.0 Ah Battery packs, C12 C Charger, Kitbox |
| Article Number | 4933446607 |

TEST & MEASUREMENT



M12 IC

M12™ SUB COMPACT M-SPECTOR™ 360° CAMERA



- Rotating screen: screen rotates 270 degrees providing the user fluid image control
- Optimised 68.6 mm LCD: digital image and larger screen delivers crisp, clear picture
- 9 mm 640 x 480 digital image sensor: superior image quality in nearly half the size
- 4 surround LED lights: best in class brightness without shadow or glare
- Enhanced cable: aluminium head and improved flexibility deliver unmatched durability and pipe manoeuvrability
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries
- Accessories: hook, magnet, and mirror attachments help to inspect and solve



Rotating screen



4 surround LED lights



Enhanced cable: aluminium head and improved flexibility

| M12 IC-201C (S) | |
|-------------------------------|--|
| Display size (mm) | 68 |
| Display resolution (pixels) | 320 x 240 |
| Camera head diameter (mm) | 9 |
| Camera cable length (mm) | 914 |
| Weight with battery pack (kg) | 0.6 |
| Kit included | 1 x 2.0 Ah Battery pack, C12 C Charger, Kitbox |
| Article Number | 4933451024 |

M12 IC AV3 | M12™ DIGITAL INSPECTION CAMERA



- Removable screen, screen can be removed from console and works within a range of 10 m
- M12™ digital inspection camera 4x zoom and screen rotation
- Optimised 85 mm LCD, digital image and larger screen delivers crisp, clear picture
- 12 mm 320 x 240 digital image sensor, superior image quality in improved larger screen
- 4 surround LED lights, for best in class brightness without shadow or glare
- Supplied with 8 GB SD memory card and 2.7 m digital cable
- Enhanced cable, aluminium head and improved flexibility delivers unmatched durability and manoeuvrability
- Articulating head attachment available as an accessory
- Flexible battery system, works with all Milwaukee® M12™ batteries



| M12 IC AV3-201C | |
|-------------------------------|--|
| Display size (mm) | 85 |
| Display resolution (pixels) | 320 x 240 |
| Camera head diameter (mm) | 12 |
| Cable length (m) | 2.7 |
| Image zoom | 4x |
| Weight with battery pack (kg) | 0.7 |
| Kit included | 1 x 2.0 Ah Battery pack, C12 C Charger, Kitbox |
| Article Number | 4933459154 |

2309-60 | ALKALINE INSPECTION CAMERA

- Optimised 65.8 mm LCD screen, digital image and large screen delivers crisp clear picture
- 9 mm 320 x 240 digital image sensor, superior image quality in nearly half the size
- Light weight sub 0.5 kg design
- Anti glare function allowing better screen visibility
- Supplied with 9V alkaline battery for over an hour continuous run time



| 2309-60 | |
|-------------------------------|--------------------------|
| Display size (mm) | 65.8 |
| Display resolution (pixels) | 320 x 240 |
| Camera head diameter (mm) | 9 |
| Cable length (m) | 0.914 |
| Weight with battery pack (kg) | 0.5 |
| Kit included | 2 x AA Batteries, Kitbox |
| Article Number | 4933451526 |



2212-20 | AUTO VOLTAGE / CONTINUITY TESTER

- Provides measurements down to decimals and displays them on an easy-to-read backlit LCD
- Automatically determines the need for voltage or continuity tests and display all measurements with proper resolution
- Compatible with accessories for carrying or mounting
- LED worklight for low lit areas
- Dual LED and audible indicators for fast and convenient test results
- Replaceable test leads for greater flexibility
- Rugged over-moulding protects your meter in any environment



| 2212-20 | |
|-------------------------------|--|
| Voltage AC/DC (V) | 600 |
| Temperature range (°C) | 0 - 50 |
| Safety rating | CAT IV 600 V |
| Continuity | Yes |
| Weight with battery pack (kg) | 0.3 |
| Kit included | 2 x AAA Batteries, No kitbox or bag supplied |
| Article Number | 4933447776 |



2267-40 | 10:1 INFRARED TEMP-GUN™

- 10:1 distance to spot ratio, a 1 m spot from 10 m away
- Up to -30°C to 400°C temperature range
- Premium LCD display for superior readability
- Simplified buttons and setup for faster scanning
- Raised overmolding protects lens and screen from direct impact



| 2267-40 | |
|-------------------------------|---|
| Temperature range (°C) | -30° to 400° |
| Basic accuracy (%) | ±2 |
| Repeatability (%) | ±0.08 |
| Emissivity | 0.95 |
| Weight with battery pack (kg) | 0.3 |
| Kit included | 2 x AA Batteries, No kitbox or bag supplied |
| Article Number | 4933451906 |



LDM 50 50 M LASER DISTANCE METER

- Easy to use one person point and shoot system
- Very slim housing design with belt clip for easy transport
- Area/volume/indirect height and patent pending surface measurement
- Min/Max sweep & continuous tracking
- Distance addition & subtraction for layouting
- Indirect height measurements (Pythagoras 2-point, 3-point, partial height)
- Large 3 line LCD graphical display with automatic white backlight
- Fold-out end piece for diagonal corner measurements
- Memory recall for the last 20 measurements
- IP54 water & dust protection
- Auto shut off and low power indication
- Metric units of measurement only



Indirect surface measurement



Pythagoras 2-point, 3-point, partial height



Fold-out end piece

| LDM 50 | |
|-------------------------------|--|
| Max. measurement range (m) | 50 |
| Accuracy | ± 1.5 |
| Laser classification | Class 2 |
| Dimensions (mm) | 119 x 40 x 32 |
| Range (m) | 0.05 - 50 |
| Weight with battery pack (kg) | 0.1 |
| Pythagoras function | 2-point, 3-point, partial height |
| Inclination Sensor | no |
| Height tracking | no |
| Kit included | 2 x AAA Batteries, No kitbox or bag supplied |
| Article Number | 4933447700 |

LDM 30 | 30 M LASER DISTANCE METER

- Easy to use one person point and shoot system
- IP54 water & dust protection
- Auto shut off and low power indication
- Metric & Imperial units of measurement
- Very slim housing design with belt clip for easy transport
- Two easy to touch measure buttons on the front and side of the housing
- Enables user to perform single measurements & continuous tracking
- Large 3 line LCD graphical display with automatic white backlight
- Display shows last three measurements



| LDM 30 | |
|-------------------------------|----------------------------|
| Max. measurement range (m) | 30 |
| Accuracy | ± 2 |
| Display | LCD |
| Display size (mm) | 25 x 25 |
| Laser classification | Class 2 |
| Dimensions (mm) | 101 x 38 x 28 |
| Range (m) | 0.15 - 30 |
| Weight with battery pack (kg) | 0.1 |
| Pythagoras function | No |
| Inclination Sensor | No |
| Height tracking | No |
| Kit included | 2 x AAA Batteries, Blister |
| Article Number | 4933459276 |



WORKGEAR



M12 HJP



M12™ HEATED HYBRID PUFFER JACKET

- Powered by M12™ REDLITHIUM™-ION battery technology, the hybrid puffer jacket uses carbon fibre heating elements to create and distribute heat to the chest, back and shoulders
- A one-touch LED controller allows the user to select from 3 heat settings, delivering ideal heat for any environment
- Superior run time – up to 8 hours of heat on a single battery charge (2.0 Ah)
- The Ripstop Polyester provides a lightweight design that can be used as an outer-shell or as a mid-layer (100% Polyester outer and inner shell)
- Water and wind resistant - provides comfort and durability in harsh environments
- Machine washable and dryable
- Reinforced high-wear zones protect from abrasion and tears
- M12™ battery holder - concealed battery pocket for minimal user interference
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| | M12 HJP-0 (S) | M12 HJP-0 (M) | M12 HJP-0 (L) | M12 HJP-0 (XL) | M12 HJP-0 (2XL) |
|-------------------------------|---|---|---|---|---|
| Weight with battery pack (kg) | 0.9 | 0.9 | 1.0 | 1.0 | 1.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | No batteries supplied, No charger supplied, No kitbox or bag supplied | No batteries supplied, No charger supplied, No kitbox or bag supplied | No batteries supplied, No charger supplied, No kitbox or bag supplied | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933464364 | 4933464365 | 4933464366 | 4933464367 | 4933464368 |



Water and wind resistant



Carbon fibre heating elements



Heat is created and distributed to the chest, back and shoulders

M12 HJ BL4 | M12™ PREMIUM HEATED JACKET

- Heat on Demand - 5 sewn in carbon fibre heating zones, distributes heat to core body areas and to the front pockets
- Superior run time, up to 8 hours of heat on a single battery charge of an M12™ REDLITHIUM™-ION 2.0 Ah battery pack
- Easy touch heat controller - 3 heat settings: High, Medium, Low
- TOUGHSHIELD™ stretch 100% polyester material to withstand harsh working conditions and up to 5x longer life
- FREE FLEX™ mobility - additional material under the arms increases range of movement for working overhead
- Water and wind resistant, provides comfort and durability in harsh environments
- Improved design with extended back and adjustable waist prevents heat loss and keeps the user warm
- M12™ battery controller with 1 A USB port, to charge mobile devices stored in concealed battery pocket
- Machine washable and dryable
- Big hand & chest pocket, ideal for storing mobile devices
- Flexible battery system: works with all MILWAUKEE® M12™ batteries

| | M12 HJ BL4-0 (S) | M12 HJ BL4-0 (M) | M12 HJ BL4-0 (L) | M12 HJ BL4-0 (XL) | M12 HJ BL4-0 (2XL) |
|-------------------------------|---|---|---|---|---|
| Weight with battery pack (kg) | 1.5 | 1.5 | 1.6 | 1.7 | 1.8 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | No batteries supplied, No charger supplied, No kitbox or bag supplied | No batteries supplied, No charger supplied, No kitbox or bag supplied | No batteries supplied, No charger supplied, No kitbox or bag supplied | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933464322 | 4933464323 | 4933464324 | 4933464325 | 4933464326 |



M12

M12 HH GREY3 | M12™ GREY HEATED HOODIE

- Rugged heated hoodie made from durable cotton (53%) exterior with durable reinforced utility pockets and waffle-weave polyester (47%) lining to withstand tough outdoor conditions
- In autumn and spring the hoodie can be worn as a rugged outer layer. In winter, it is best as a base layer that allows to shed bulky undergarments while generating and holding heat close to the body
- Superior run time, up to 8 hours of heat on a single battery charge of an M12™ REDLITHIUM™-ION battery pack
- Multiple heating zones - 3 sewn in carbon fibre heating zones distribute heat to core body areas
- Easy touch heat controller - 3 heat settings: High, Medium, Low
- M12™ battery holder is stored in a concealed battery pocket for increased comfort and convenience
- Hood fits easily under hard hat
- Integrated cell phone pocket
- Machine washable and dryable
- Flexible battery system: works with all MILWAUKEE® M12™ batteries

| | M12 HH GREY3-0 (S) | M12 HH GREY3-0 (M) | M12 HH GREY3-0 (L) | M12 HH GREY3-0 (XL) | M12 HH GREY3-0 (2XL) |
|-------------------------------|---|---|---|---|---|
| Weight with battery pack (kg) | 1.1 | 1.1 | 1.3 | 1.4 | 1.5 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | No batteries supplied, No charger supplied, No kitbox or bag supplied | No batteries supplied, No charger supplied, No kitbox or bag supplied | No batteries supplied, No charger supplied, No kitbox or bag supplied | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933464352 | 4933464353 | 4933464354 | 4933464355 | 4933464356 |



M12

WORK GLOVES









| | | Size | Article Number | |
|-----------------------|---|------|----------------|--|
| Fingerless gloves | <ul style="list-style-type: none"> • Designed to provide ultimate dexterity when handling small objects. • Reinforced palm and thumb seam. • Lightweight, breathable backing. • Moisture wicking lining provides all day comfort. • Built-in sweat wipe. | M | 48229741 | |
| | | L | 48229742 | |
| | | XL | 48229743 | |
| | | XXL | 48229744 | |
| FREE-FLEX work gloves | <ul style="list-style-type: none"> • SMARTSWIPE™ knuckle, palm and fingertips. • Flexible and elastic gloves. • Lightweight, breathable backing. • Reinforced thumb seam. • High dexterity finger tips. | M | 48229711 | |
| | | L | 48229712 | |
| | | XL | 48229713 | |
| | | XXL | 48229714 | |
| Demolition Gloves | <ul style="list-style-type: none"> • ARMORTEX™ reinforced palms and finger tips: Increased durability and hand protection. • SMARTSWIPE™ Knuckle: Capacitive knuckle allows to use touch screen devices without removing gloves or using dirty fingertips. • Breathable tri-cot lining: Provides ultimate comfort and breathability. • Knuckle protection: TPR pad provides knuckle protection. | M | 48229731 | |
| | | L | 48229732 | |
| | | XL | 48229733 | |
| | | XXL | 48229734 | |

CUT RESISTANCE DIPPED GLOVES

NEW

| | | Colour code | Size | Pack quantity | Article Number | |
|-----------------------|--|-------------|------|---------------|----------------|--|
| Cut Level 1 Gloves | <ul style="list-style-type: none"> • Designed to provide ultimate durability and all-day comfort, ideal for material handling or light construction duty. • Reinforced palm due to a nitrile texture. • Designed to provide dexterity when handling small objects. • SMARTSWIPE™ palm and fingertips - allows the use of touch screen devices without removing gloves. • European Certified for cut protection: EN420 and EN388:2016 (3121A). | White | M | 1 | 4932471416 | |
| | | | | 12 | 4932471614 | |
| | | | L | 1 | 4932471417 | |
| | | | | 12 | 4932471615 | |
| | | | XL | 1 | 4932471418 | |
| | | | | 12 | 4932471616 | |
| Cut Level 3 Gloves | <ul style="list-style-type: none"> • Offers more resistance than a Cut Level 1, to cut and abrasion, ideal protection for stripping wire or pipe threading and cutting. • Excellent grip performance, nitrile material performs better than other materials in wide range of temperatures and oily surfaces. • Superior puncture resistance for sharp materials. • SMARTSWIPE™ palm and fingertips - allows the use of touch screen devices without removing gloves. • European Certified for cut protection: EN420 and EN388:2016 (4343C). | Black | M | 1 | 4932471420 | |
| | | | | 12 | 4932471618 | |
| | | | L | 1 | 4932471421 | |
| | | | | 12 | 4932471619 | |
| | | | XL | 1 | 4932471422 | |
| | | | | 12 | 4932471620 | |
| Cut Level 5 Gloves | <ul style="list-style-type: none"> • Double layer of nitrile for added durability and increased protection from sharp objects. • Excellent grip performance, nitrile material performs better than other materials in wide range of temperatures and oily surfaces. • Proprietary knitting process for all day comfort and high breathability while working all day. • SMARTSWIPE™ palm and fingertips - allows the use of touch screen devices without removing gloves. • European Certified for cut protection: EN420 and EN388:2016 (4X44E). | Red | M | 1 | 4932471424 | |
| | | | | 12 | 4932471622 | |
| | | | L | 1 | 4932471425 | |
| | | | | 12 | 4932471623 | |
| | | | XL | 1 | 4932471426 | |
| | | | | 12 | 4932471624 | |
| Winter Level 1 Gloves | <ul style="list-style-type: none"> • Winter insulation will keep the hand warm while working in cold conditions. • High dexterity while handling small objects. • Warm and dual liner for excellent warmth in coolest condition and for high breathability all day. • European Certified for cut and cold resistance protection: EN420, EN388:2016 (1141A), EN511 (01X). | White | M | 1 | 4932471343 | |
| | | | | 12 | 4932471606 | |
| | | | L | 1 | 4932471344 | |
| | | | | 12 | 4932471607 | |
| | | | XL | 1 | 4932471345 | |
| | | | | 12 | 4932471608 | |
| Winter Level 3 Gloves | <ul style="list-style-type: none"> • Winter insulation will keep the hand warm while working in cold conditions. • Gloves fit comfortably after being worn for extended periods of time. • Improved water resistance to keep hands from cold and wet environment due to a ¾ double dipped latex coverage. • European Certified for cut and cold resistance protection: EN420, EN388:2016 (2442C), EN511 (02X). | Black | M | 1 | 4932471347 | |
| | | | | 12 | 4932471610 | |
| | | | L | 1 | 4932471348 | |
| | | | | 12 | 4932471611 | |
| | | | XL | 1 | 4932471349 | |
| | | | | 12 | 4932471612 | |
| XXL | 1 | 4932471350 | | | | |
| | 12 | 4932471613 | | | | |

EQUIPMENT





| | | Article Number | |
|---------------------------|--|----------------|---|
| Electricians pouch | Robust construction, made from 1680D ballistic nylon. | 48228112 |  |
| | Solid base allows bag to stand-up, even when fully loaded. | | |
| | Integrated belt loops allow bag to be worn on a tool belt. | | |
| Contractor rig | Robust construction, made from 1680D ballistic nylon. | 48228120 |  |
| | Padded 4-point harness distributes weight for all day comfort. | | |
| | Padded, breathable belt for ultimate comfort and jobsite performance. | | |
| Padded rig | Adjustable straps designed to fit all users. | 48228145 |  |
| | 1680D ballistic material construction. | | |
| Work belt | Metal hardware and 1680D ballistic nylon provide a lifetime of service. | 48228140 |  |
| | Up to 152 mm (6") of padding and can accommodate waist sizes up to 143 mm (5 3/4"). | | |
| Jobsite backpack | Hard moulded base allows bag to stand-up and provides ultimate all-weather protection. | 48228200 |  |
| | Vertical tool wall maximises storage space while allowing for bulk storage space. | | |
| | Laptop pocket allows protected storage for laptops/tablets and personal goods. | | |
| Tradesman backpack | Durable construction, made from 1680D ballistic nylon. | 4932464252 |  |
| | Laptop pocket allows protected storage for laptops/tablets and personal goods. | | |
| | 18 organiser pockets allow variety of options. | | |
| Low profile backpack | Reinforced base protects the backpack from being damaged by abusive jobsite conditions. | 4932464834 |  |
| | Padded and breathable load-bearing harness evenly distributes the weight for more comfort and jobsite performance. | | |
| | 22 pockets including a padded electronic sleeve to provide ultimate organisation. | | |
| Ultimate jobsite backpack | Hard molded base allows backpack to stand up and reduces ingress of dirt and water. | 4932464833 |  |
| | Padded and breathable load-bearing harness evenly distributes the weight for more comfort and jobsite performance. | | |
| | 48 total pockets including 2 hardshell pockets to protect electronics and equipment from impact. | | |
| Jobsite Cooler | Constructed with 1680D Ballistic Material and with rugged metal zippers to provide increased durability. | 4932464835 |  |
| | Specifically designed to be durable enough to withstand tough jobsite conditions. | | |
| | Cooler utilises double insulation and a food-grade leak proof liner to keep ice cold for 24 hours without leaking. | | |

LOCKING TOOL LANYARDS

NEW

- Superior shock absorption - gradually stop the tool if dropped.
- Double locking carabiner - ensures a secure connection that cannot become loose or slip off accidentally.
- Integrated swivel - prevents twists and tangles allowing increased mobility.
- Colour coded weight rating - easy identification of lanyard weight capacity.
- High versatility - lanyard accessories can be added to connect all tools to the lanyards.








| Catalogue product description | Bearing force [kg] | Colour code | Article Number | |
|--|--------------------|-------------|----------------|---|
| 4.5 kg Locking Tool Lanyard - 1pc | 4.5 | Red | 4932471351 |  |
| 4.5kg Quick-Connect Locking Tool Lanyard - 1pc | 4.5 | Red | 4932471429 |  |
| 6.8kg Locking Tool Lanyard - 1pc | 6.8 | Black | 4932471352 |  |
| 15.8kg Locking Tool Lanyard - 1pc | 15.8 | Grey | 4932471353 |  |

TOOL LANYARD ACCESSORIES

NEW

- High versatility - lanyard accessories can be added to connect all tools to the lanyards.
- Easy and versatile connection to all the kind of tools.
- Strong and secure attachment.
- Jobsite performance for an ultimate tool tethering.

| Catalogue product description | Colour code | Bearing force [kg] | Pack quantity | Article Number | |
|--|-------------|--------------------|---------------|----------------|---|
| 3pc 2.25kg Small Quick-Connect Accessory | White | 2.2 | 3 | 4932471430 |  |
| 5pc 2.25kg D-Ring Web Attachment | White | 2.2 | 5 | 4932471431 |  |
| 12ft Self-Adhering Tape | - | - | 1 | 48228860 |  |
| 5pc 1kg 1-1/2" Split Ring | - | 1 | 5 | 4932471433 |  |
| 5pc 1kg 2" Split Ring | - | 1 | 5 | 4932471434 |  |

PACKOUT™

MODULAR STORAGE SYSTEM

VERSATILE, DURABLE

The MILWAUKEE® PACKOUT™ modular storage system revolutionises tool transportation, organisation and storage. Designed to provide users with the ability to interchange and interlock a wide assortment of heavy duty tool boxes, organisers and storage totes in multiple different configurations.



**FULLY
CUSTOMISE
YOUR STORAGE**



**IMPACT
RESISTANT
BASE**



**IP65
RATED
PROTECTION**


PACKOUT™ MODULAR STORAGE SYSTEM

| | | Dimensions (mm) | No. of pockets | Article Number | |
|---|------------------------|-----------------|----------------|----------------|--|
| ① | Packout Trolley Box | 560 x 410 x 480 | - | 4932464078 | |
| ② | PACKOUT™ case 2 | 560 x 410 x 290 | - | 4932464079 | |
| ③ | PACKOUT™ case 3 | 560 x 410 x 170 | - | 4932464080 | |
| ④ | Packout 3pcs Set - 1pc | - | - | 4932464244 | |
| | Packout Flat Trolley | 610 x 480 x 190 | - | 4932471068 | |
| | Packout Mounting Plate | 600 x 470 x 030 | - | 4932471638 | |
| | Packout Crate | 450 x 390 x 250 | - | 4932471724 | |
| | Packout Adaptor HD Box | - | - | 4932464081 | |
| | Packout foam insert | 485 x 090 x 325 | - | 4932471428 | |

| | | Dimensions (mm) | No. of pockets | Article Number | |
|--------------------------------|---|-----------------|----------------|----------------|--|
| PACKOUT™ organiser case | <ul style="list-style-type: none"> Part of the PACKOUT™ modular storage system. Constructed with impact resistant polymers for jobsite durability. The interior features 10 removable & mountable bins that can be mounted onto common jobsite materials for easy access. IP65 rated weather seal to keep out rain and jobsite debris. No-travel bins seals to prevent the bins contents from migrating between bins during transport. | 500 x 380 x 120 | - | 4932464082 | |
| Packout Compact Organiser | <ul style="list-style-type: none"> Part of the PACKOUT™ modular storage system. Constructed with impact resistant polymers for jobsite durability. The interior features 5 removable & mountable bins that can be mounted onto common jobsite materials for easy access. IP65 rated weather seal to keep out rain and jobsite debris. No-travel bins seals to prevent the bins contents from migrating between bins during transport. | 250 x 380 x 120 | - | 4932464083 | |
| PACKOUT™ slim organiser | <ul style="list-style-type: none"> Part of the PACKOUT™ modular storage system. Constructed with impact resistant polymers for jobsite durability. Interior features 2 large bins and 8 small bins. All bins contain dividers. No travel bin seals to prevent the bins contents from migrating between bins during transportation. IP 65 rated weather seal to keep out rain and jobsite debris. | 500 x 380 x 65 | - | 4932471064 | |
| Packout Compact Slim Organiser | <ul style="list-style-type: none"> Part of the PACKOUT™ modular storage system. Constructed with impact resistant polymers for jobsite durability. Interior features 1 large bin and 4 small bins. All bins contain dividers. No travel bin seals to prevent the bins contents from migrating between bins during transportation. IP 65 rated weather seal to keep out rain and jobsite debris. | 250 x 380 x 65 | - | 4932471065 | |
| 25 cm Tote Toolbag | <ul style="list-style-type: none"> Part of the PACKOUT™ modular storage system. 1680 ballistic material construction. Impact resistant molded base. All metal hardware. Durable overmolded handle. | 250 x 280 x 320 | 28 | 4932464084 | |
| 40 cm Tote Toolbag | | 250 x 400 x 320 | 31 | 4932464085 | |
| 50 cm Tote Toolbag | | 250 x 500 x 320 | 32 | 4932464086 | |

| | | Dimensions (mm) | No. of pockets | Article Number | |
|---------------------------|--|-----------------|----------------|----------------|--|
| 38 cm PACKOUT™ duffel bag | <ul style="list-style-type: none"> Part of the PACKOUT™ modular storage system. Made from 1680D Ballistic Material for jobsite durability. Impact resistant polymer base protects contents from water, dirt and tear. Large storage capacity for larger tools. Cushioned shoulder strap, top and side handles for flexible carry. | 380 x 250 x 340 | - | 4932471066 | |
| 50 cm PACKOUT™ duffel bag | | 500 x 310 x 350 | - | 4932471067 | |
| Packout Tech Bag | <ul style="list-style-type: none"> Part of the PACKOUT™ modular storage system. Made from 1680D ballistic material for jobsite durability. 58 total pockets. Hardshell protected instrument pocket. Secure and protected storage for laptops and tablets. Impact resistant polymer base protects contents from water, dirt and tear. | 430 x 270 x 450 | 58 | 4932471130 | |
| PACKOUT™ backpack | <ul style="list-style-type: none"> Part of the PACKOUT™ modular storage system. Made from 1680D ballistic material for jobsite durability. 48 total pockets including a hard-shell protected instrument pocket. Extra back padding, chest strap, attachment strap for rolling bags and heavy duty harness for ultimate jobsite comfort. Impact resistant polymer base protects contents from water and dirt and also allows backpack to stand up. | 380 x 240 x 500 | 48 | 4932471131 | |
| Packout Jobsite Cooler | <ul style="list-style-type: none"> Part of the PACKOUT™ modular storage system. 20l volume capacity with a dry compartment and a storage space for drinks. Extra insulation keeps contents cold for 24 hours. Impact resistant polymer base protects contents from water, dirt, and tear. Shoulder strap for easy transport. | 380x240x330 | - | 4932471132 | |

OUTDOOR EQUIPMENT

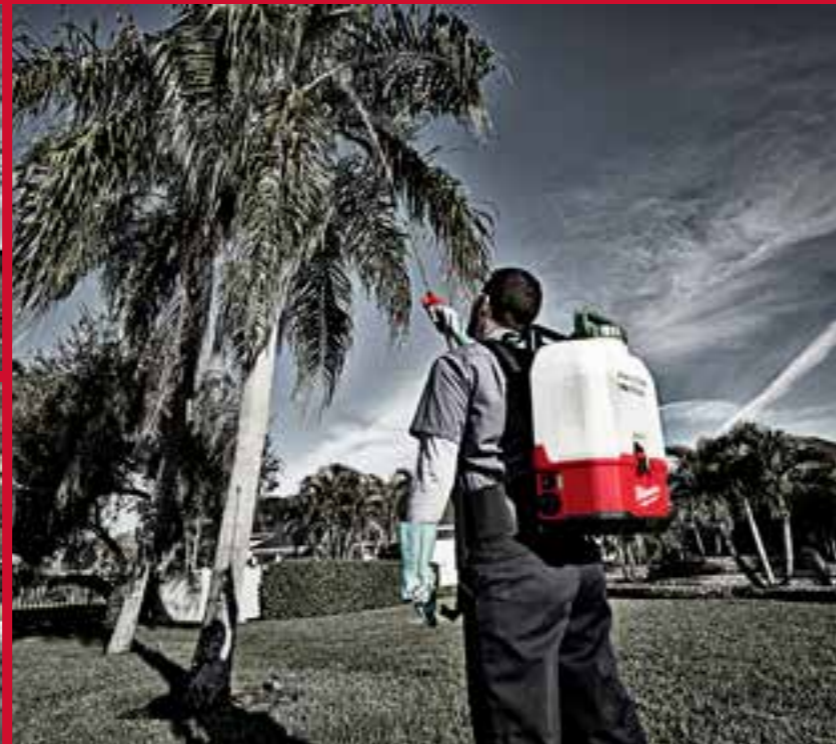

M18 FCHS

M18 FUEL™ CHAINSAW WITH 40 CM BAR

- The M18 FUEL™ chainsaw delivers the power to outperform on the most demanding chainsaw applications vs. petrol chainsaws
- FUEL™ technology allows the saw to maintain speed in tough application without bogging down, giving it the ability to outperform petrol chainsaws up to 40cc
- Next generation POWERSTATE™ brushless motor, REDLINK PLUS™ electronics and REDLITHIUM™-ION HIGH OUTPUT™ 12.0 Ah battery pack deliver superior performance, durability and run time in high demand applications
- Provides extremely high work per charge the saw will cut 150 pieces of 100 mm x 100 mm pine on one full charge of a 12.0 Ah battery pack
- High strength all metal gearing delivers best in class torque
- Variable speed trigger allows the user to have full control over the power curve, giving instantaneous throttle response to reach full speed in under one second
- All metal bucking spikes allows the user increased leverage when cutting
- No-spill oil reservoir with easy to access tank and clear viewing window
- Supplied with 80cc of oil, chain tool and bar cover



| | M18 FCHS-0 | M18 FCHS-121 |
|-------------------------------|---|--|
| Chain bar length (cm) | 40 | 40 |
| Chain speed (m/s) | 12.4 | 12.4 |
| Weight with battery pack (kg) | - | 6.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1 x 12.0 Ah Battery pack, M12-18 FC Charger, No kitbox or bag supplied |
| Article Number | 4933464723 | 4933464224 |

406.4 MM SAW CHAIN FOR M18 FUEL™ SAW

Article Number **4932464873**



M18 FUEL



Variable speed trigger



All metal bucking spikes



No-spill oil reservoir

M18 FCHSC | M18 FUEL™ CHAINSAW WITH 30 CM BAR

- Delivers the power to outperform on the most demanding chainsaw applications vs. petrol chainsaws
- FUEL™ technology allows the saw to maintain speed in tough application without bogging down, giving it the ability to outperform petrol chainsaws up to 40cc
- Next generation POWERSTATE™ brushless motor, REDLINK PLUS™ electronics and REDLITHIUM™-ION HIGH OUTPUT™ 12.0 Ah battery pack deliver superior performance, durability and run time in high demand applications
- Provides extremely high work per charge the saw will cut 150 pieces of 100 mm x 100 mm pine on one full charge of a 12.0 Ah battery pack
- Shorter bar of 30 cm allows users to work in confined areas
- Variable speed trigger allows the user to have full control over the power curve, giving instantaneous throttle response to reach full speed in under one second
- All metal bucking spikes allows the user increased leverage when cutting
- No-spill oil reservoir with easy to access tank and clear viewing window
- Supplied with 80cc of oil, chain tool and bar cover
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 FCHSC-0 | M18 FCHSC-121 |
|-------------------------------|---|--|
| Chain bar length (cm) | 30 | 30 |
| Chain speed (m/s) | 12.4 | 12.4 |
| Weight with battery pack (kg) | - | 6.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1 x 12.0 Ah Battery pack, M12-18 FC Charger, No kitbox or bag supplied |
| Article Number | 4933471441 | 4933471443 |

M18 FUEL

M18 FBL | M18 FUEL™ BLOWER

- POWERSTATE™ brushless motor provides increased efficiency, lasts longer and delivers maximum power
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- Ergonomic inline design clears debris and dirt in tight spaces
- Up to 12.74 m³/min of air volume at 193 km/h to clear debris
- Variable trigger and speed lock for full power control
- Lock-on switch
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 FBL-0 |
|-------------------------------|---|
| Air volume 1 [m³ per minute] | 8.75 |
| Air volume 2 [m³ per minute] | 12.7 |
| Airflow speed 1 [km per h] | 133 |
| Airflow speed 2 [km per h] | 193 |
| Fan speed [rpm] | 14,000 |
| Weight with battery pack (kg) | 4.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459825 |

M18 FUEL

M18 CLT | M18 FUEL™ LINE TRIMMER

- POWERSTATE™ brushless motor provides increased efficiency, lasts longer and delivers maximum power
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- Full throttle in under 1 second
- Has the power to clear thick brush
- Up to 1 hour of run time with M18™ 9.0 Ah battery pack
- 2-speed with variable speed trigger
- 135° protection guard
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 CLT-0 |
|-------------------------------|---|
| Cutting line diameter (mm) | 2.4 |
| Cutting path width [cm] | 38.6 |
| Weight with battery pack (kg) | 5.6 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459345 |

M18 FUEL

M18 CHT | M18 FUEL™ HEDGE TRIMMER

- POWERSTATE™ brushless motor provides increased efficiency, lasts longer and delivers maximum power
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- Power to cut 20 mm branches
- 600 mm blade trims more material in a single pass, increasing reach and productivity
- Up to 2 hours run time with M18™ 9.0 Ah battery pack
- Cuts up to 30% faster vs. cordless competitor
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18 CHT-0 |
|--|---|
| No load speed [ml/min] | 3400 |
| Blade length (mm) | 610 |
| Tooth spacing [mm] | 20 |
| Cutting Capacity [mm] | 20 |
| Sharpening angle to horizontal [Degrees] | < 30 |
| Weight with battery pack (kg) | 5.0 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459346 |

M18 FUEL


M18 FOPH

M18 FUEL™ OUTDOOR POWER HEAD WITH QUIK-LOK™™

- o Versatile outdoor power equipment system, powered by a single power head
- o Delivers the capability to swap between multiple attachments to complete a wide range of applications
- o Full throttle in under 1 second
- o 2-speed with variable speed trigger
- o POWERSTATE™ brushless motor provides increased efficiency, lasts longer and delivers maximum power
- o REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- o Adjustable auxiliary handle, strap and carrying ring help set the tool up for the optimum user comfort and control

NEW M18 FUEL

| M18 FOPH-0 | |
|-------------------------------|---|
| No load speed gear 1 (rpm) | 0 - 6860 |
| No load speed gear 2 (rpm) | 0 - 8680 |
| Weight with battery pack (kg) | 4.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933464954 |

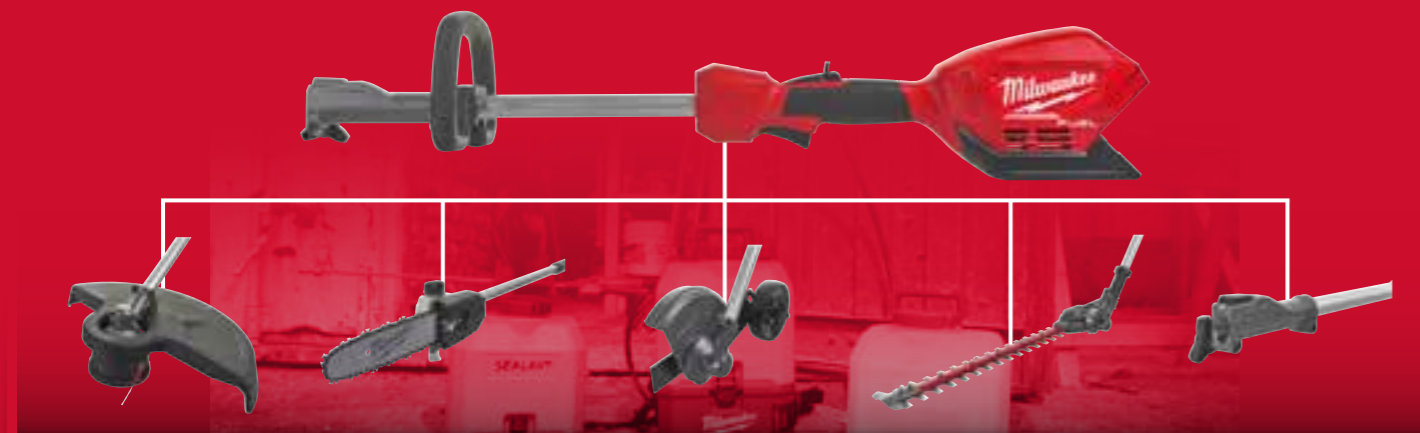

| M18 FOPH-LTA | M18 FOPH-CSA | M18 FOPH-EA | M18 FOPH-HTA | M18 FOPH-EXA |
|-----------------------------------|-------------------------------|----------------------------|------------------------------------|--------------------------------|
| QUIK-LOK™ line trimmer attachment | QUIK-LOK™ chainsaw attachment | QUIK-LOK™ edger attachment | QUIK-LOK™ hedge trimmer attachment | QUIK-LOK™ extension attachment |
| 4932464955 | 4932464957 | 4932464958 | 4932464959 | 4932464960 |

M18 FOPHLTKIT | M18 FUEL™ OUTDOOR POWER HEAD - LINE TRIMMER KIT

M18 FUEL

- o Brushless POWERSTATE™ motor for longer motor life and up to 20% more power
- o REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- o Full throttle in under 1 second
- o Has the power to clear thick brush
- o Up to 1 hour of run time with M18™ 9.0 Ah battery pack
- o 2-speed with variable speed trigger
- o 135° protection guard
- o Compatible with all MILWAUKEE® outdoor power head system attachments
- o Flexible battery system: works with all MILWAUKEE® M18™ batteries
- o Adjustable auxiliary handle, strap and carrying ring help set the tool up for the optimum user comfort and control



| M18 FOPHLTKIT-0 | |
|-------------------------------|---|
| No load speed gear 1 (rpm) | 0 - 4900 |
| No load speed gear 2 (rpm) | 0 - 6200 |
| Cutting line diameter (mm) | 2.0 / 2.4 |
| Max. cutting capacity (mm) | 400 |
| Weight with battery pack (kg) | 4.7 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933464956 |

M18 BPFPH

M18™ SWITCH TANK™™

NEW M18

- o The M18™ SWITCH TANK™ 15 l backpack fluid pump sprayer delivers the industry's first interchangeable tank design with no manual pumping
- o The interchangeable tank design isolates the pump, hose and wand, separating wearable components from the M18™ SWITCH TANK™ powered base
- o Add on and replace tank assemblies to eliminate cross-chemical contamination and lower cost of ownership
- o 120 PSI (8.27 Bar) pump pressure
- o Features adjustable pressure selection dial to best suit user requirements
- o Up to 2 hours of run time (12 or more tanks) with 4.0 Ah battery pack
- o Flexible battery system: works with all MILWAUKEE® M18™ batteries

| | M18 BPFPH-0 | M18 BPFPH-401 |
|-------------------------------|---|--|
| Weight with battery pack (kg) | - | 5.0 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 1 x 4.0 Ah Battery pack, M12-18 C Charger, No kitbox or bag supplied |
| Article Number | 4933464961 | 4933464963 |



The interchangeable tank design



Add on and replace tank assemblies to eliminate cross-chemical contamination



| M18 BPFPH-CST | M18 BPFPH-WST |
|--|---|
| M18™ SWITCH TANK™ 15L Chemical Sprayer | M18™ SWITCH TANK™ 15L Water Supply |
| <ul style="list-style-type: none"> o Fully compatible with SWITCH TANK™ o Chemical sprayer tank for pesticides/fertilizers/treatments/herbicides/fungicides/insecticides/de-icing agents and more o Semi-transparent tank with measuring scale to know how much liquid is inside the tank o Carry handle lid with wide mouth makes easy transport and pouring of water/chemicals into tank o Comfortable rubber gripped spray wand handle with ability to lock-on for larger jobs o Sprayer wand storage to save space and avoid damage during transport o Integrated strainer prevents debris from entering the tank o Adjustable spray pattern - from cone to straight stream for end user preference and application. Up to 7.6 m spray distance o 5-mode pressure adjustment knob o UV and chemical resistant o When equipped with an M18™ REDLITHIUM-ION™ 4.0 Ah battery it provides up to 12 tanks of spraying per charge | <ul style="list-style-type: none"> o Fully compatible with SWITCH TANK™ o Water sprayer tank for efficient water delivery for concrete cutting and coring applications. Also useful for washing up slurry's, areas and equipment o Semi-transparent tank with measuring scale to know how much liquid is inside the tank o Carry handle lid with wide mouth makes easy transport and pouring of water into tank o Replaceable hose with standard garden hose quick coupling and spray nozzle - attaches easily to concrete cutting and coring equipment. Also compatible with standard garden nozzle accessories o Integrated strainer prevents debris from entering the tank o 5-mode pressure adjustment knob o UV resistant o When equipped with an M18™ REDLITHIUM-ION™ 4.0 Ah battery it provides up to 12 tanks of spraying per charge |
| 4933464964 | 4933464965 |

DRAIN CLEANERS



M12 BDC6 | M12™ SUB COMPACT DRAIN CLEANER WITH SPIRAL DIAMETER 6 MM

M12

- Lightest professional drain cleaner on the market
- Versatile design, provides benefits of both handheld and floor based drain cleaners in one machine
- Best user flexibility and manoeuvrability due to the independence of electric power supply
- Tool includes a highly flexible 6 mm spiral for easy access in drainpipes up to 50 mm, also all standard Ø 6 & 8 mm spirals can be used with the tool
- Robust drum shield protects user & fixtures from spinning drum during use
- Easy removable inner drum helps to prevent spiral bind up and contains dirt inside the drum
- Quick cable lock mechanism for manual feeding and releasing the spiral
- Integrated LED light illuminates work area underneath sinks and other dark spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life



| M12 BDC6-0C | |
|-------------------------------|--|
| No load speed (rpm) | 0 - 500 |
| Max. drain diameter [mm] | 50 |
| Spiral diameter [mm] | 6 |
| Cable length (m) | 7.6 |
| Bucket capacity (l) | 22.5 |
| Weight with battery pack (kg) | - |
| Kit included | No batteries supplied, No charger supplied, Bucket |
| Article Number | 4933451634 |

M12 BDC8 | M12™ SUB COMPACT DRAIN CLEANER WITH SPIRAL DIAMETER 8 MM

M12

- Lightest professional drain cleaner on the market
- Versatile design, provides benefits of both handheld and floor based drain cleaners in one machine
- Best user flexibility and manoeuvrability due to the independence of electric power supply
- Tool includes a tough 8 mm spiral for strong blockages in pipes up to 60 mm, also all standard Ø 6 & 8 mm spirals can be used with the tool
- Robust drum shield protects user & fixtures from spinning drum during use
- Easy removable inner drum helps to prevent spiral bind up and contains dirt inside the drum
- Quick cable lock mechanism for manual feeding and releasing the spiral
- Integrated LED light illuminates work area underneath sinks and other dark spaces
- REDLINK™ overload protection electronics in tool and battery pack deliver best in class system durability
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



| M12 BDC8-0C | |
|-------------------------------|--|
| No load speed (rpm) | 0 - 500 |
| Max. drain diameter [mm] | 60 |
| Spiral diameter [mm] | 8 |
| Cable length (m) | 7.6 |
| Bucket capacity (l) | 22.5 |
| Weight with battery pack (kg) | - |
| Kit included | No batteries supplied, No charger supplied, Bucket |
| Article Number | 4933451632 |

M18 FDCPF8 | M18 FUEL™ DRAIN CLEANER - POWER FEED 8 MM

M18 FUEL

- Brushless POWERSTATE™ motor delivers maximum power 15 m down the line
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- CABLE-DRIVE locking feed system maintains selected feed speed, and auto-adjusts to compatible cable sizes for the best cable grip when feeding and working the clog
- Fully enclosed drum for best protection and mess containment
- LED light illuminates work area underneath sinks and other dark spaces
- Accepts other brand cables
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| M18 FDCPF8-0C | |
|-------------------------------|--|
| No load speed (rpm) | 0 - 600 |
| Max. drain diameter [mm] | 75 |
| Spiral diameter [mm] | 8 |
| Spiral length [mm] | 10.6 |
| Bucket capacity (l) | 23 |
| Weight with battery pack (kg) | 6.9 |
| Standard equipment | 1 x 10 mm x 10.6 m cable (48532675), retriever bulb, removal pin |
| Kit included | No batteries supplied, No charger supplied, Bucket |
| Article Number | 4933459683 |

M18 FDCPF10

M18 FUEL

M18 FUEL™ DRAIN CLEANER - POWER FEED 10 MM

- Brushless POWERSTATE™ motor delivers maximum power 15 m down the line
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- CABLE-DRIVE locking feed system maintains selected feed speed, and auto-adjusts to compatible cable sizes for the best cable grip when feeding and working the clog
- Fully enclosed drum for best protection and mess containment
- LED light illuminates work area underneath sinks and other dark spaces
- Accepts other brand cables
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



CABLE-DRIVE locking feed system



Fully enclosed drum



Storage bucket included

| M18 FDCPF10-0C | |
|-------------------------------|--|
| No load speed (rpm) | 0 - 600 |
| Max. drain diameter [mm] | 75 |
| Spiral diameter [mm] | 10 |
| Cable length (m) | 10.6 |
| Bucket capacity (l) | 23 |
| Weight with battery pack (kg) | - |
| Standard equipment | 1 x 10 mm x 10.6 m cable (48532675), retriever bulb, removal pin |
| Kit included | No batteries supplied, No charger supplied, Bucket |
| Article Number | 4933459684 |

M18 FFSDC10 | M18 FUEL™ FREE STANDING DRAIN CLEANER 10 MM

M18 FUEL

- Brushless POWERSTATE™ motor delivers maximum power 30 m down the line
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- M18 FUEL™ SWITCH PACK™ tool-free drum connection system allows users to quickly interchange between cable sizes, or add a second drum to reach 30 m down the line
- Built-in backpack straps for the easiest transport to any roof, drain, crawl space, or clean out
- Integrated drum brake electronically slows drum super-fast for end user control and safety
- Electronic foot pedal with non-slip grip for maximum durability
- Fully enclosed drum for best protection and mess containment
- SWITCH PACK™ drum capacity 8 mm x 23 m inner core cable
- On-tool accessory attachment storage



| M18 FFSDC10-0 | |
|-------------------------------|---|
| No load speed (rpm) | 0 - 250 |
| Max. drain diameter [mm] | 75 |
| Spiral diameter [mm] | 10 |
| Cable length (m) | 15 |
| Weight with battery pack (kg) | 13.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459707 |

M18 FFSDC16

M18 FUEL™ FREE STANDING DRAIN CLEANER 16 MM

M18 FUEL

- Brushless POWERSTATE™ motor delivers maximum power 30 m down the line
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™-ION battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- M18 FUEL™ SWITCH PACK™ tool-free drum connection system allows users to quickly interchange between cable sizes, or add a second drum to reach 30 m down the line
- Built-in backpack straps for the easiest transport to any roof, drain, crawl space, or clean out
- Integrated drum brake electronically slows drum super-fast for end user control and safety
- Electronic foot pedal with non-slip grip for maximum durability
- Fully enclosed drum for best protection and mess containment
- SWITCH PACK™ drum capacity 8 mm x 23 m inner core cable
- On-tool accessory attachment storage
- Supplied with 1 x backpack assembly, 2 x drum assembly's, 2 x 16 mm x 15 m cables, 1 x cutter set & removal tool
- Accepts other brand cables
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 FFSDC16-0

| | |
|-------------------------------|---|
| No load speed (rpm) | 0 - 250 |
| Max. drain diameter (mm) | 110 |
| Spiral diameter (mm) | 16 |
| Cable length (m) | 15 |
| Weight with battery pack (kg) | - |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459709 |



M18 FUEL™ SWITCH PACK™ tool-free drum connection system



Built-in backpack straps for the easiest transport



Electronic foot pedal with non-slip grip

M18 FPFT

M18 FUEL™ POWERED FISH TAPE

M18 FUEL

NEW

- The M18 FUEL™ Fish Tape is the world's first professional battery powered cable pulling solution
- POWERSTATE™ brushless motor that provides the ability to pull a maximum length of 72 m wire
- AUTO-RUN™ powered feeding and cable pulling is a fast and efficient solution providing higher productivity vs other solutions
- Less user fatigue due to powered wire pulling, especially when working on overhead installations
- Quick tool free drum exchange with 4 compatible interchangeable drums, Steel Tape: 36 and 72 m / Non-conductive Tape: 30 and 60 m
- Proprietary anti-binding drum design for smoother feeding and retracting
- Variable speed trigger for maximum control during tape feeding and wire pulling
- Integrates three MILWAUKEE®-exclusive technologies - the POWERSTATE™ brushless motor, REDLITHIUM™-ION battery pack and REDLINK PLUS™ intelligence hardware and software - which deliver outstanding power, run time and durability on the jobsite
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



M18 FPFT-0

| | |
|-------------------------------|---|
| Weight with battery pack (kg) | - |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933471952 |



Faster than current manual solutions



AUTO-RUN™ powered feed & retract



No mess retracting cable, anti binding drum

M18 FUEL™ FISH TAPE COMPATIBLE DRUMS

| | Description | Article Number | | Description | Article Number | |
|------------------|-----------------------------|----------------|--|----------------------|------------------------------------|----------|
| Steel fish drums | 36 m x 3 mm steel fish drum | 48445176 | | Non-conductive drums | 30 m non-conductive polyester drum | 48445195 |
| | 72 m x 3 mm steel fish drum | 48445178 | | | 60 m non-conductive polyester drum | 48445197 |

DRAIN CLEANER ACCESSORIES

| | Fits drain cleaners M12BDC6, M12 BDC8 | Fits drain cleaners M18 FDCPF8, M18 FDCPF10 | Fits drain cleaners M18 FFSDC16, M18 FFSDC13, M18 FFSDC10 | Fits sewer machine M18 FSSM | Article Number | |
|---|---------------------------------------|---|---|-----------------------------|----------------|--|
| Ø 8 mm x 7.6 m spiral, bulb auger | ✓ | - | - | - | 48532571 | |
| Ø 6 mm x 7.6 m spiral, bulb auger | ✓ | - | - | - | 48532573 | |
| Ø 8 mm x 7.6 m pivot bulb auger spiral | ✓ | - | - | - | 48532572 | |
| Ø 6 mm x 7.6 m pivot bulb auger spiral | ✓ | - | - | - | 48532574 | |
| Ø 8 mm x 7.6 m spiral, bulb auger with drum | ✓ | - | - | - | 48532581 | |
| Ø 6 mm x 7.6 m spiral, bulb auger with drum | ✓ | - | - | - | 48532583 | |
| Ø 8 mm x 7.6 m spiral, pivot bulb auger with drum | ✓ | - | - | - | 48532582 | |
| Ø 6 mm x 7.6 m spiral, pivot bulb auger with drum | ✓ | - | - | - | 48532584 | |
| 6 mm x 10.5 m spiral bulb auger | - | ✓ | - | - | 48532671 | |
| 8 mm x 10.5 m spiral bulb auger | - | ✓ | - | - | 48532673 | |
| 6 mm x 15 m spiral bulb auger | - | ✓ | - | - | 48532672 | |
| 10 mm x 10.5 m spiral | - | ✓ | - | - | 48532675 | |
| 8 mm x 15 m spiral bulb auger | - | ✓ | - | - | 48532674 | |
| Retriever bulb. | - | ✓ | ✓ | - | 48532681 | |
| Down retriever bulb. | - | ✓ | ✓ | - | 48532682 | |
| 25 mm spade bit. | - | ✓ | ✓ | - | 48532683 | |
| 25 mm grease cutter. | - | ✓ | ✓ | - | 48532684 | |
| M18™ small 5 pcs attachment set | - | ✓ | ✓ | - | 48532685 | |
| Drain cleaner drum only | - | - | ✓ | - | 4932464277 | |
| 8 mm x 23 m spiral bulb auger. | - | - | ✓ | - | 48532772 | |
| 10 mm x 15 m spiral. | - | - | ✓ | - | 48532773 | |
| 13 mm x 15 m spiral. | - | - | ✓ | - | 48532774 | |
| 16 mm x 15 m spiral. | - | - | ✓ | - | 48532775 | |
| Funnel retriever. | - | ✓ | ✓ | - | 48532786 | |
| Drop head. | - | ✓ | ✓ | - | 48532787 | |
| 36 mm spade bit. | - | ✓ | ✓ | - | 48532788 | |
| 40 mm grease cutter. | - | ✓ | ✓ | - | 48532789 | |

| | Fits drain cleaners M12BDC6, M12 BDC8 | Fits drain cleaners M18 FDCPF8, M18 FDCPF10 | Fits drain cleaners M18 FFSDC16, M18 FFSDC13, M18 FFSDC10 | Fits sewer machine M18 FSSM | Article Number | |
|--|---------------------------------------|---|---|-----------------------------|----------------|--|
| M18™ medium 5 pcs attachment set | - | ✓ | ✓ | - | 48532790 | |
| Straight auger for sectional machine 22 mm cables | - | - | - | ✓ | 48533830 | |
| Straight auger for sectional machine 32 mm cables | - | - | - | ✓ | 48534830 | |
| Funnel retriever for sectional machine 22 mm cables | - | - | - | ✓ | 48533831 | |
| Funnel retriever for sectional machine 32 mm cables | - | - | - | ✓ | 48534831 | |
| 75 mm root cutter for sectional machine 22 mm cables | - | - | - | ✓ | 48533832 | |
| 75 mm root cutter for sectional machine 32 mm cables | - | - | - | ✓ | 48534832 | |
| 100 mm root cutter for sectional machine 22 mm cables | - | - | - | ✓ | 48533833 | |
| 100 mm root cutter for sectional machine 32 mm cables | - | - | - | ✓ | 48534833 | |
| 150 mm root cutter for sectional machine 22 mm cables | - | - | - | ✓ | 48533834 | |
| 150 mm root cutter for sectional machine 32 mm cables | - | - | - | ✓ | 48534834 | |
| Small opening tool for sectional machine 22 mm cables | - | - | - | ✓ | 48533835 | |
| Small opening tool for sectional machine 32 mm cables | - | - | - | ✓ | 48534835 | |
| Medium opening tool for sectional machine 22 mm cables | - | - | - | ✓ | 48533836 | |
| Medium opening tool for sectional machine 32 mm cables | - | - | - | ✓ | 48534836 | |
| 75 mm grease cutter for sectional machine 22 mm cables | - | - | - | ✓ | 48533837 | |
| 75 mm grease cutter for sectional machine 32 mm cables | - | - | - | ✓ | 48534837 | |
| 100 mm grease cutter for sectional machine 22 mm cables | - | - | - | ✓ | 48533838 | |
| 100 mm grease cutter for sectional machine 32 mm cables | - | - | - | ✓ | 48534838 | |
| Head attachment kit for sectional machine 22 mm cables contains: straight auger, funnel retriever, 75, 100 and 150 mm root cutters, small and medium opening tools, 75 and 100 mm grease cutters | - | - | - | ✓ | 48533840 | |
| Head attachment kit for sectional machine 32 mm cables contains: straight auger, funnel retriever, 75, 100 and 150 mm root cutters, small and medium opening tools, 75 and 100 mm grease cutters | - | - | - | ✓ | 48534839 | |
| 22 mm x 4.5 m coupling end open wind cable | - | - | - | ✓ | 4932471712 | |
| 32 mm x 4.5 m coupling end open wind cable | - | - | - | ✓ | 4932471710 | |
| 32 mm x 4.5 m heavy duty coupling end open wind cable | - | - | - | ✓ | 4932471711 | |
| Kit of seven 22 mm x 4.5 m coupling end open wind cables | - | - | - | ✓ | 4932471713 | |

TRUEVIEW™ HIGH DEFINITION LIGHTING



M18 ONESLDP

M18™ ONE-KEY™ LED COMPACT SITE LIGHT CHARGER

- Optimise brightness and run time by adjusting the light output from 0 - 9000 Lumens
- ONE-KEY™ tool customisation allows user to control brightness and set light settings remotely
- ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention
- Program automatic schedules to decide during which days/times the light is running
- Integrated M18™ charger - charges up to 2 batteries sequentially
- Dual power source, powered by either M18™ REDLITHIUM™-ION battery packs or use of 2.5 m hardwired cord
- AC outlet gives the possibility to string multiple lights together
- Highly durable and impact resistant polycarbonate lens to protect the light from rough jobsite conditions
- IP54 rating in battery mode - light is protected from dust and splashing water
- TRUEVIEW™ high definition light output delivers consistent beam, optimised colour temperature and true representation of colours and detail
- Securable battery door helps to protect batteries from theft (lock not included)

TRUEVIEW™ **ONE-KEY™**
UNLOCKING THE DIGITAL JOBSITE.



| M18 ONESLDP-0 | |
|---|---|
| System | M18 |
| Battery compatibility | All Milwaukee® M18™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 9000 / 4800 / 2500 / - |
| Max. run time with M18 B9 battery [h] | 3.5 / 7 / 14 / - |
| Weight with battery pack (kg) | 12.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number 110V | 4933459161 |

M18



ONE-KEY™ technology enables advanced light customisation and to control the light remotely



Integrated M18™ charger - charges up to 2 batteries sequentially



Highly durable and impact resistant polycarbonate lens

M18 ONESLSP | M18™ ONE-KEY™ LED COMPACT SITE LIGHT

- ONE-KEY™ tool customisation allows user to control brightness and set light settings remotely
- ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention
- Optimise brightness and run time by adjusting the light output between 0 - 4400 Lumens
- Program automatic schedules to decide during which days/times the light is running
- TRUEVIEW™ high definition lighting solutions combine the most advanced LED technology
- 180° and 360° electronic light control for large area and task lighting
- Self-centering metal hook designed for hanging the light from studs or pipes
- Dual power source, powered by either M18™ REDLITHIUM™-ION battery packs or use of 2.5 m hardwired cord
- AC outlet gives the possibility to string multiple lights together
- Up to 8 hours of run time on low setting when powered by an M18™ REDLITHIUM™-ION 5.0 Ah battery pack



| M18 ONESLSP-0 | |
|---|---|
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 4400 / 2100 / 1000 / - |
| Max. run time with M18 B5 battery [h] | 2 / 4 / 8 / - |
| Weight with battery pack (kg) | 5.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number 110V | 4933459156 |

TRUEVIEW™

M18 TAL | M18™ TRADESMAN AREA LIGHT

- TRUEVIEW™ high definition lighting with 2,200 Lumens of light output in Area mode and 1,000 Lumens in Flood mode
- Advanced LED technology provides 360° of area light, while an independent array of LEDs on the side provide 90° of task lighting
- Compact design allowing for one-handed transport on the jobsite, with a built-in carry handle
- Impact polycarbonate lens design that is impact and chemical resistant, delivering superior impact durability
- Equipped with a 10.8 cm self-centering metal hook, users can hang the light overhead on studs and piping
- Low battery indicator, light flashes when battery pack is low on charge
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



TRUEVIEW™ **M18**

| M18 TAL-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M18™ batteries |
| Bulb type | LED |
| Max. light output Area Mode High/Medium/Low (Lumens) | 2200 / 1100 / 550 |
| Max. light output Flood Mode High/Medium/Low (Lumens) | 1000 / 500 / 250 |
| Max. run time with M18 B5 battery [h] | 4 / 8 / 16 |
| Weight with battery pack (kg) | 2.5 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933464134 |

HOBL 7000 | HIGH OUTPUT BAY LIGHT

- TRUEVIEW™ high definition lighting - 7700 Lumens of even light output for best jobsite illumination (110 Lumens / Watt)
- Impact resistant polycarbonate lens withstands drops from up to 2.7 m
- Integrated wiring terminal accepts voltages from 90 -277 V, allows easy wiring and stringing of multiple lights
- Wire strain relief accepts cables up to H07RNF 3 x 2.5 mm²
- Spring-loaded cable retention allows easy adjustment of installation height with 1.2 m steel hanging cable
- 4 m AC power cord for out of the box operation
- Conical lens design and small footprint allow simple storage and safe stacking of up to 3 units



TRUEVIEW™

| HOBL 7000 | |
|------------------|---------------------------|
| Voltage (AC) (V) | 90 - 277 |
| Bulb type | LED |
| Weight (kg) | 3.7 |
| Supplied in | No kitbox or bag supplied |
| Article Number | 4933464161 |

M18 HSAL | M18™ HIGH PERFORMANCE LED STAND LIGHT CHARGER

- TRUEVIEW™ high definition lighting
- Twelve high performance LEDs and 3 light settings provide up to 3000 Lumens on High mode which is brighter than a 500 Watt halogen light
- 3 impact resistant adjustable heads with highly durable polycarbonate lens can be rotated 180° vertically and pivoted 240° horizontally to have the perfect workplace illumination
- Integrated M18™ charger
- Dual power source, powered by either M18™ REDLITHIUM™-ION battery packs or use of 2.5 m hardwired cord
- Protective guard secures the head and lens when the light is collapsed for storage or transport
- Extendable mast which reaches from 1.10 m to over 2.15 m to light up work spaces from top without casting shadows
- Compact footprint with low center of gravity and impact resistant reinforced nylon legs to protect against abusive jobsite conditions
- Carry handles with rubber overmould on two positions for easy one-handed transport, weight is evenly balanced when compressed
- Low battery indicator, light flashes when battery pack is low on charge



TRUEVIEW™ **M18**

| M18 HSAL-0 | | M18 HSAL-502B | |
|---|---|--|-------------------------------|
| Battery compatibility | All Milwaukee® M18™ batteries | All Milwaukee® M18™ batteries | All Milwaukee® M18™ batteries |
| Bulb type | LED | LED | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 3000 / 1700 / 900 / - | 3000 / 1700 / 900 / - | 3000 / 1700 / 900 / - |
| Weight with battery pack (kg) | - | 8.5 | - |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 5.0 Ah Battery packs, M12-18 C Charger, Tool bag | - |
| Article Number 110V | 4933451393 | 4933451897 | - |

M18 ONERSAL

M18™ ONE-KEY™ LED REMOTE STAND LIGHT

M18

- Optimise brightness and run time by adjusting the light output from 0 - 5400 Lumens
- ONE-KEY™ tool customisation allows user to control brightness and set light settings remotely
- ONE-KEY™ tool tracking & security offers a cloud-based inventory management platform that supports both location tracking and theft prevention
- IP67 allows use in all weather conditions (heavy rain, snow, dusty environments)
- Reinforced leg design with 3 different leg deployment options for best durability and stability
- Highly durable and impact resistant polycarbonate lens and all aluminium cam design to protect the light from rough working conditions
- TRUEVIEW™ high definition light output delivers consistent beam, optimised colour temperature and true representation of colours and detail
- Sealed battery compartment for up to 2 packs to extend run time
- Change height from 0.5 m to 1.65 m to cast light from overhead to limit shadows
- Collapsible to only 55 cm for easy storage and transportation

TRUEVIEW™ **ONE-KEY™**
UNLOCKING THE DIGITAL JOBSITE.



ONE-KEY™ technology enables advanced light customisation and to control the light remotely



Change height from 0.5 m to 1.65 m to cast light from overhead to limit shadows



Sealed battery compartment for 2 packs to extend run time

M18 ONERSAL-0

| | |
|---|---|
| Battery compatibility | All Milwaukee® M18™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 5400 / 3000 / 1550 / - |
| Max. run time with M18 B9 battery [h] | 7 / 12.5 / 26 / - |
| Weight with battery pack (kg) | 9.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459431 |

M18 SAL | M18™ LED STAND LIGHT

- TRUEVIEW™ high definition lighting
- Twelve high performance LEDs provide 2000 Lumens on high light output which is brighter than 250 Watt halogen
- Impact resistant adjustable head with highly durable polycarbonate lens can be rotated 230° vertically and pivoted 240° horizontally
- Protective guard secures the head and lens when the light is collapsed for storage or transport
- Extendable mast which reaches from 1.10 m to over 2.20 m to light up work spaces from top without casting shadows
- IP54 - protected from dust and splashing water
- Compact footprint with low center of gravity and impact resistant reinforced nylon legs to protect against abusive jobsite conditions
- Carry handles on two positions for easy one handed transport: weight is evenly balanced when compressed
- Low battery indicator - light flashes when battery pack is low



TRUEVIEW™ **M18**

| | M18 SAL-0 | M18 SAL-502B |
|---|---|--|
| System | M18 | M18 |
| Battery compatibility | All Milwaukee® M18™ batteries | All Milwaukee® M18™ batteries |
| Bulb type | LED | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 2000 / 1300 / 850 / - | 2000 / 1300 / 850 / - |
| Max. run time with M18 B5 battery [h] | 4 / 6 / 10 / - | 4 / 6 / 10 / - |
| Weight with battery pack (kg) | - | 7.3 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 5.0 Ah Battery packs, M12-18 C Charger, Tool bag |
| Article Number | 4933451246 | 4933451895 |

M12 SAL | M12™ STAND LIGHT

TRUEVIEW™ **M12**

- TRUEVIEW™ high definition lighting
- 12 high performance LEDs provide 1400 Lumens on high light output
- Impact resistant adjustable head with highly durable polycarbonate lens to withstand drops up to 3 m
- Head can be rotated 210° vertically and pivoted 270° horizontally to have the best perfect workplace illumination
- Protective guard secures the head and lens when the light is collapsed for storage or transport
- Extendable mast which reaches from 0.91 m to over 1.72 m to light up work spaces
- Compact footprint with low center of gravity and impact resistant reinforced nylon legs to protect against abusive jobsite conditions
- Carry handles on 2 positions for easy one handed transport: weight is evenly balanced when compressed
- Low battery indicator - light flashes when battery pack is low



| M12 SAL-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M18™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 1400 / - / 700 / - |
| Max. run time with M12 B4 battery [h] | 4 / - / 10 / - |
| Weight with battery pack (kg) | 3.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933464823 |

M18 PAL | M18™ PIVOTING AREA LIGHT

TRUEVIEW™ **M18**

- TRUEVIEW™ high definition lighting with up to 1500 Lumens and up to 20 hours of run time, allows replacement of 500 W halogen
- Two powerful magnets, a spring loaded clamp and a folding rotating light head design provide multiple mounting options and illumination possibilities from any angle
- Highly durable and impact resistant polycarbonate lens to withstand drops up to 2.7 metres
- Most compact M18™ flood light designed for the on-the-go needs of service and maintenance trades
- IP54 rating, the light is protected from dust and splashing water
- Integrated handle/tie off zone, designed to be carried or tethered while used on a scissor lift
- Low battery indicator, light flashes when battery pack is low on charge
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| M18 PAL-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M18™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 1500 / 600 / 300 |
| Max. run time with M18 B5 battery [h] | 4.5 / 10 / 20 |
| Weight with battery pack (kg) | 2.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933464105 |

M18 HAL | M18™ HIGH PERFORMANCE LED AREA LIGHT

TRUEVIEW™ **M18**

- TRUEVIEW™ high definition lighting
- Twelve high performance LEDs and 3 light settings provide up to 3000 Lumens on high - up to 30% brighter than a 500 Watt halogen light
- 240° rotatable light head and integrated key holes for horizontal and vertical hanging
- Impact resistant polycarbonate lens and durable roll cage to protect the light from rough jobsite conditions
- Dual power source, powered by either M18™ REDLITHIUM™-ION battery packs or by 2.5 m included extension cord
- Easy one-handed transport with built-in carry handles
- Low battery indicator, light flashes when battery pack is low on charge
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| M18 HAL-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M18™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 3000 / 1500 / 650 / - |
| Weight with battery pack (kg) | 3.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number 110V | 4933451263 |

M18 AL | M18™ LED AREA LIGHT

- TRUEVIEW™ high definition lighting
- Eight high performance LEDs provide 1500 Lumens of light output - up to 30% brighter than 250 W halogen lights
- Compact roll cage design provides superior durability
- Convenient built-in handle - ability to hang vertically or horizontally
- Flexibility to mount vertically on a max. 13 mm diameter pipe, threaded rod or rebar to maximise hands-free operation
- Flexible battery system: works with all MILWAUKEE® M18 batteries™



TRUEVIEW™ M18

| M18 AL-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M18™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 1500 / - / 780 |
| Weight with battery pack (kg) | 2.1 |
| Kit included | No batteries supplied, No charger supplied, Blister |
| Article Number | 4932430392 |

M12 SLED | M12™ LED SPOT LIGHT

- TRUEVIEW™ high definition lighting
- Up to 35% longer beam distance than competition - 650 m intense and highly focused beam of light with 750 Lumens
- Especially useful for long range identification - utility pole/high voltage cable inspection, inspection of long runs of conduit, cast or copper pipe, under ground work, bridge work
- Metal housing and impact resistant polycarbonate lens with gasketed rubber cap which protects from moisture for harsh jobsite conditions
- The reflector produces narrow centre beam with wide peripheral beam
- Ergonomic grip with rubber overmold - enhances user comfort and grip during use
- 45° rubber overmold stand for aiming beam upward during prolonged use when the light is equipped with a compact battery pack
- Up to 8 hours of runtime with an M12™ REDLITHIUM™-ION 4.0 Ah battery pack
- Dual function trigger allows momentary or lock-on use
- Battery fuel gauge displays battery status
- Hand wrist lanyard to keep the light safe and handy
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



TRUEVIEW™ M12

| M12 SLED-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M12™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 750 / - / 400 / 750 |
| Max. run time with M12 B4 battery [h] | 4 / - / 8 / 8 |
| Beam distance [m] | 650 |
| Weight with battery pack (kg) | 0.8 |
| Kit included | No batteries supplied, No charger supplied, Blister |
| Article Number | 4933451261 |

M12 AL | M12™ LED AREA LIGHT

- TRUEVIEW™ high definition lighting
- Five high performance LEDs provide 1000 Lumens of light output replacing 250 W halogen lights
- Highly durable and impact resistant polycarbonate lens to withstand drops up to 2.7 metres
- Integrated magnets, clamping mechanism, and key hole for screws / nails provide multiple mounting options for different surfaces
- Most compact flood light designed for the on-the-go needs of service and maintenance trades
- IP54 rating, the light is protected from dust and splashing water
- Low battery indicator, light flashes when battery pack is low on charge
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



TRUEVIEW™ M12

| M12 AL-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M12™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 1000 / 500 / 250 |
| Max. run time with M12 B4 battery [h] | 3.5 / 7.5 / 15 |
| Weight with battery pack (kg) | 1.3 |
| Kit included | No batteries supplied, No charger supplied, Blister |
| Article Number | 4933451394 |

M12 UHL | M12™ LED UNDERHOOD LIGHT

- TRUEVIEW™ high definition light output delivers consistent beam, optimised colour temperature and true representation of colours and detail
- Two light output settings with 1350 and 600 Lumens to maximise run time and to optimise lighting output
- M12™ 4.0 Ah battery provides 4 hours of run time in high and 8 hours of run time in low setting
- Mounting hooks extend 119 cm - 196 cm (47" - 77") covering wide cars and trucks
- Flexible and versatile light bar to rotate vertically, adjust position and remove from the carrier to suit user needs
- Rubber gripping surface for maximum hold
- FINISHGUARD™ hooks provide lasting protection against scratches to a vehicle's finish
- Stainless hook allows to hang the light bar independently from the carrier
- Aircraft grade aluminium frame ensures maximum durability
- Impact and chemical resistant polycarbonate lens to withstand common automotive fluids
- IP54 - protected from dust and splashing water



TRUEVIEW™ M12

| M12 UHL-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M12™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 1350 / - / 600 / - |
| Max. run time with M12 B4 battery [h] | 4 / - / 8 / - |
| Weight with battery pack (kg) | 1.1 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459432 |

M18 SLED | M18™ LED SEARCH LIGHT

- TRUEVIEW™ high definition lighting
- Pivoting head provides 1250 Lumens with up to 650 m beam distance
- 4 output modes: Spot, Flood, Spot/Flood, Strobe delivering multiple options in work space illumination
- Spot mode for long range identification: utility pole/high voltage cable inspection, inspection of long runs of conduit, cast or copper pipe, under ground work, bridge work...
- Flood mode for illuminating close work spaces
- IP54 rating, the light is protected from dust and splashing water
- Ergonomic grip with rubber overmould enhances user comfort and grip during use
- Key hole for hanging function
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



TRUEVIEW™ M18

| M18 SLED-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M18™ batteries |
| Bulb type | LED |
| Max. light output Spot_flood/Flood/Spot/Strobe (Lumens) | 1250 / 1200 / 600 / 1200 |
| Max. run time with M18 B5 battery [h] | 4 / 4 / 7 / 5 |
| Beam distance [m] | 650 |
| Weight with battery pack (kg) | 1.4 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933459159 |

M18 IL | M18™ LED INSPECTION LIGHT

- TRUEVIEW™ high definition lighting
- Three LED design with 2 light settings provides 300 Lumens on High and 130 Lumens on Low setting
- Pivoting 45° forward & backward head allows for 180° coverage
- 2 adjustable metal hooks for hanging in vertical and horizontal position
- Thanks to its compact design it operates in locations other lights cannot
- Protected against splashing water at all angles (IP24)
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



TRUEVIEW™ M18

| M18 IL-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M18™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 300 / - / 130 / - |
| Weight with battery pack (kg) | 1.2 |
| Kit included | No batteries supplied, No charger supplied, Blister |
| Article Number | 4932430564 |

M12 SL | M12™ LED STICK LIGHT

- TRUEVIEW™ high definition lighting
- Powerful three LED design provides 220 Lumens
- Adjustable metal hook allows for light to be hung in multiple orientations when being used
- Compact design - operates in locations other lights cannot
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



TRUEVIEW™ M12

| M12 SL-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M12™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 220 / - / - / - |
| Weight with battery pack (kg) | 0.5 |
| Kit included | No batteries supplied, No charger supplied, Blister |
| Article Number | 4932430178 |

M12 MLED | M12™ LED HIGH PERFORMANCE FLASHLIGHT

- TRUEVIEW™ high definition lighting
- Sliding head allows adjustment of beam pattern from flooding to spotting
- Powerful LED can cast 350 m intense and highly focused beam of light with up to 800 Lumens
- Machined 6000 series aluminium with a type II anodized finish body, highly durable and impact resistant polycarbonate lens for extreme durability
- Ergonomic contoured grip with knurled texture ensures perfect handle
- IP54 rating, light is protected from dust and splashing water
- M12™ fuel gauge with low battery indication
- Hand wrist lanyard to keep the light safe and handy
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



TRUEVIEW™ M12

| M12 MLED-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M12™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 800 / - / 325 / 800 |
| Max. run time with M12 B4 battery [h] | 5 / - / 7 / 7 |
| Beam distance [m] | 350 |
| Weight with battery pack (kg) | 0.7 |
| Kit included | No batteries supplied, No charger supplied, Blister |
| Article Number | 4933451899 |

M18 LL | M18™ LED LANTERN LIGHT

- TRUEVIEW™ high definition lighting
- 180° - 360° adjustable beam - versatile design, allows the user to select between area lighting and task lighting
- Best-in-class performance - unmatched light output 700 Lumens, designed to illuminate large areas
- High powered USB charger charges tablets, smart phones, MP3 players and other electronic devices
- Job site durability - rugged designed with impact resistant lens to withstand abusive job site conditions
- 4 light settings - provides 700 Lumens on High & Strobe (100%), 350 Lumens on Medium (50%), 70 Lumens on Low (10%)
- 2 hooks for hanging
- Protected against splashing water at all angles (IP24)
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



TRUEVIEW™ M18

| M18 LL-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M18™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 700 / 350 / 70 / 700 |
| Beam distance [m] | 29 |
| Weight with battery pack (kg) | 1.4 |
| Kit included | No batteries supplied, No charger supplied, Blister |
| Article Number | 4932430563 |

M18 TLED | M18™ LED TORCH

- The 120 Lumen LED light is 2x brighter and whiter than conventional incandescent bulbs
- M18™ LED electronics deliver 2x longer run time on a single charge with less heat than conventional removable light bulbs
- Sealed aluminium head is designed for impact- and weather-resistant durability
- 135° rotating head allows the user to easily direct the light beam at the desired work area
- Integrated hook for hands-free use
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



TRUEVIEW™ M18

| M18 TLED-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M18™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 120 / - / - / - |
| Weight with battery pack (kg) | 0.7 |
| Kit included | No batteries supplied, No charger supplied, Blister |
| Article Number | 4932430361 |

M12 LL | M12™ LED LANTERN LIGHT

- TRUEVIEW™ high definition lighting
- 180° - 360° adjustable beam - versatile design, allows the user to select between area lighting and task lighting
- Best-in-class performance - unmatched light output 400+ Lumens, designed to illuminate large areas
- High powered 2.1A USB charger charges tablets, smart phones, MP3 players and other electronic devices
- Job site durability - rugged designed with impact resistant lens to withstand abusive job site conditions
- 2 hooks for hanging
- Protected against splashing water at all angles (IP24)
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



TRUEVIEW™ M12

| M12 LL-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M12™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 400 / 200 / 40 / 400 |
| Beam distance [m] | 23 |
| Weight with battery pack (kg) | 0.9 |
| Kit included | No batteries supplied, No charger supplied, Blister |
| Article Number | 4932430562 |

M12 TLED | M12™ LED TORCH

- The 120 Lumen LED light is 2x brighter and whiter than conventional incandescent bulbs
- M12™ LED electronics deliver 2x longer run time on a single charge with less heat
- Sealed aluminium head is designed for impact- and weather-resistant durability
- 90° rotating head allows the user to easily direct the light beam at the desired work area
- Magnetic back for hands-free use
- Flexible battery system: works with all MILWAUKEE® M12™ batteries



TRUEVIEW™ M12

| M12 TLED-0 | |
|---|---|
| Battery compatibility | All Milwaukee® M12™ batteries |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 120 / - / - / - |
| Weight with battery pack (kg) | 0.5 |
| Kit included | No batteries supplied, No charger supplied, Blister |
| Article Number | 4932430360 |

L4 FL | USB RECHARGEABLE POCKET FLOOD LIGHT

- 445 Lumens of TRUEVIEW™ high definition output
- Can be mounted with double magnet and clipped on pockets
- Compact size allows easy storage in pocket
- IP54 rating, light is protected from dust and splashing water
- Impact and chemical resistant lens
- Fuel gauge allows fast checking of REDLITHIUM™ USB battery charge
- Conveniently charge REDLITHIUM™ USB battery internally with micro-USB cable from USB power source or AC outlet (wall plug not included)
- Jobsite tough micro-USB braided cable with metal ends
- Includes USB cable



NEW TRUEVIEW™ REDLITHIUM USB

| L4 FL-201 | |
|---|---|
| System | REDLITHIUM™ USB |
| Battery compatibility | REDLITHIUM™ USB battery |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 445 / - / 100 / - |
| Max. run time with L4 B2 battery [h] | 2 / - / 11 / - |
| Weight with battery pack (kg) | 0.2 |
| Kit included | 1 x 2.5 Ah Battery pack, No charger supplied, Blister |
| Article Number | 4933459442 |

L4 FFL | USB RECHARGEABLE FOLDING FLOOD LIGHT

- 550 Lumens of TRUEVIEW™ high definition output delivers consistent beam, optimised colour temperature and true representation of colours & details
- Can be mounted with double magnet or hanging the light with an integrated carabiner hook gives more versatility
- Compact size allows easy storage in pocket
- IP54 rating, light is protected from dust and splashing water
- Impact and chemical resistant lens for more durability on the jobsite
- Fuel gauge allows fast checking of REDLITHIUM™ USB battery charge
- Conveniently charge REDLITHIUM™ USB battery internally with micro-USB cable from USB power source or AC outlet (wall plug not included)
- Jobsite tough micro-USB braided cable with metal ends
- Includes USB cable



NEW TRUEVIEW™ REDLITHIUM USB

| L4 FFL-201 | |
|---|---|
| System | REDLITHIUM™ USB |
| Battery compatibility | REDLITHIUM™ USB battery |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 550 / 250 / 100 / - |
| Max. run time with L4 B2 battery [h] | 2 / 4.5 / 11.5 / - |
| Weight with battery pack (kg) | 0.2 |
| Kit included | 1 x 2.5 Ah Battery pack, No charger supplied, Blister |
| Article Number | 4933464821 |

L4 PWL | USB RECHARGEABLE PIVOTING WORK LIGHT

- 500 Lumens Spot & Flood beam with TRUEVIEW™ high definition output delivers consistent beam, optimised colour temperature and true representation of colours & details
- Spot & Flood beam options in different output modes for optimal brightness and up to 10 hrs run time
- Light head can be maneuvered up to 45° to help users direct light where it's needed most
- Impact and chemical resistant lens for a longer durability
- Fuel gauge allows fast checking of REDLITHIUM™ USB battery charge
- Conveniently charge REDLITHIUM™ USB battery internally with micro-USB cable from USB power source or AC outlet (wall plug not included)
- Jobsite tough micro-USB braided cable with metal ends
- Includes USB cable



NEW TRUEVIEW™ REDLITHIUM USB

| L4 PWL-201 | |
|--|---|
| System | REDLITHIUM™ USB |
| Battery compatibility | REDLITHIUM™ USB battery |
| Bulb type | LED |
| Max. light output Flood [High/Medium/Low] Spot Mode [Lumens] | 400 / - / 100 / 500 |
| Max. run time with L4 B2 battery [h] | 3 / - / 10 / 3 |
| Weight with battery pack (kg) | 0.2 |
| Kit included | 1 x 2.5 Ah Battery pack, No charger supplied, Blister |
| Article Number | 4933464822 |

L4 HL | USB RECHARGEABLE HEADLAMP

- 475 Lumens Spot & Flood beam with TRUEVIEW™ high definition output
- Flood, Spot and Spot/Flood beam options in different output modes for optimal brightness and up to 31 hrs. run time
- 4 mounting clips for securing to helmets and adjustable strap with rubber grip
- Light can be maneuvered in (7) different positions and features 216° tilting motion to help users direct light where it's needed most
- Removable strap connector allows for handheld use
- IP53 rating, light is protected from dust and falling water
- Impact and chemical resistant lens
- Fuel gauge allows fast checking of REDLITHIUM™ USB battery charge
- Conveniently charge REDLITHIUM™ USB battery internally with micro-USB cable from USB power source or AC outlet (wall plug not included)
- Jobsite tough micro-USB braided cable with metal ends
- Includes USB cable



NEW TRUEVIEW™ REDLITHIUM USB

| L4 HL-201 | |
|---|---|
| System | REDLITHIUM™ USB |
| Battery compatibility | REDLITHIUM™ USB battery |
| Bulb type | LED |
| Max. light output Spot_flood/Flood/Spot/Strobe [Lumens] | 475 / 25, 150, 300 / 300 / - |
| Max. run time with L4 B2 battery [h] | 2 / 31, 8.5, 4.5 / 4 / - |
| Weight with battery pack (kg) | 0.2 |
| Kit included | 1 x 2.5 Ah Battery pack, No charger supplied, Blister |
| Article Number | 4933459443 |

L4 HL-VIS | USB RECHARGEABLE HI-VIS HEADLAMP

- Exceptional hands-free task lighting with safety light provides 600 Lumens of TRUEVIEW™ high definition output with spot and flood beam options
- The safety light has steady and blinking options that make you visible up to 400 m from all directions when used with the front headlamp
- The clip on hard hat light has an elastic strap, silicon grip, includes two universal hard hat clips and is compatible with all hardhats
- Provides all-day run time with five light output modes: Hybrid Spot/Flood, Flood High, Flood Medium, Flood Low, Spot High
- IP53 water and dust resistant and can withstand up to 2 m drops
- Ideal for roadside, tunnel or underground work, spotters, signalers and professionals working around moving equipment
- Conveniently charge REDLITHIUM™ USB battery internally with micro-USB cable from USB power source or AC outlet (wall plug not included)
- Fuel gauge allows fast checking of REDLITHIUM™ USB battery charge
- Includes USB cable



NEW TRUEVIEW™ REDLITHIUM USB

| L4 HL-VIS-201 | |
|--|---|
| System | REDLITHIUM™ USB |
| Battery compatibility | REDLITHIUM™ USB battery |
| Bulb type | LED |
| Max. light output Hybrid Spot/Flood, Flood High/Medium/Low, Spot High [Lumens] | 600 / 400 / 150 / 25 / 400 |
| Max. run time with L4 B2 battery [h] | 2 / 4 / 8 / 20 / 4 |
| Weight with battery pack (kg) | 0.2 |
| Kit included | 1 x 2.5 Ah Battery pack, No charger supplied, Blister |
| Article Number | 4933471389 |

L4 HLRP | USB RECHARGEABLE HARD HAT HEADLAMP

- 600 Lumens of TRUEVIEW™ high definition output
- Features an ultra-thin light head that provides an unobstructed view with 125° of flood beam coverage
- Designed with the battery pack in the rear for maximum maneuverability in tight spaces and a balanced design for all-day use
- Equipped with a sweat absorbing microfiber strap for comfort on bare heads and four included hard hat clips for secure connections on all hardhats
- It has four light output modes: High, Medium, Low and Eco for 25+ hours of run time to maximise light output or extend run time
- The clip on hard hat light is IP54 rated for water and dust resistance and can withstand up to 2 m drops
- Conveniently charge REDLITHIUM™ USB battery internally with micro-USB cable from USB power source or AC outlet (wall plug not included)
- Fuel gauge allows fast checking of REDLITHIUM™ USB battery charge
- Includes USB cable



NEW TRUEVIEW™ REDLITHIUM USB

| L4 HLRP-201 | |
|---|---|
| System | REDLITHIUM™ USB |
| Battery compatibility | REDLITHIUM™ USB battery |
| Bulb type | LED |
| Max. light output Flood Mode High/Medium/Low/Eco [Lumens] | 600 / 350 / 125 / 25 |
| Max. run time with L4 B2 battery [h] | 2 / 6 / 10 / 27 |
| Weight with battery pack (kg) | 0.2 |
| Kit included | 1 x 2.5 Ah Battery pack, No charger supplied, Blister |
| Article Number | 4933471390 |

L4 MLED | USB RECHARGEABLE COMPACT FLASHLIGHT

- 700 Lumens of TRUEVIEW™ high definition output with up to 155 m beam distance
- Sliding head allows adjustment of beam pattern from flooding to spotting
- Aircraft aluminium "AL 6000 Series" with premium knurling grip and polycarbonate lens withstand drops from up to 4m and deliver outstanding durability
- IP67 rated for submersion in up to 1 meter of water and protection from dust
- Momentary & constant power on button
- Removable belt clip
- Fuel gauge allows fast checking of REDLITHIUM™ USB battery charge
- Conveniently charge REDLITHIUM™ USB battery internally with micro-USB cable from USB power source or AC outlet (wall plug not included)
- Jobsite tough micro-USB braided cable with metal ends
- Includes USB cable



NEW TRUEVIEW™ REDLITHIUM™ USB

| L4 MLED-201 | |
|---|---|
| System | REDLITHIUM™ USB |
| Battery compatibility | REDLITHIUM™ USB battery |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 700 / - / 100 / 700 |
| Max. run time with L4 B2 battery [h] | 4.5 / - / 16 / 9 |
| Weight with battery pack (kg) | 0.1 |
| Kit included | 1 x 2.5 Ah Battery pack, No charger supplied, Blister |
| Article Number | 4933459444 |

HL-SF | ALKALINE SPOT FLOOD HEADLAMP

- 450 Lumens of TRUEVIEW™ high definition output with 100 m spot beam distance and a wide flood beam
- Gives users up to 25 hours of run time with five light output modes to optimise run time, beam type, and brightness
- Supplied with four universal hard hat clips for secure connection to all hardhats
- IP52 rated for water and dust resistance and can withstand up to 2 m drops
- Equipped with a soft, sweat absorbing microfiber strap and forehead pad that provides users with all day comfort when worn on a bare head
- Allows users to direct the pivoting light head using seven adjustable positions
- Powered by (3) AAA batteries (included)



NEW TRUEVIEW™ III 3 AAA

| HL-SF | |
|--|----------------------------|
| Battery compatibility | Alkaline |
| Bulb type | LED |
| Max. light output Hybrid Spot/Flood, Flood High/Medium/Low, Spot High (Lumens) | 450 / 350 / 150 / 25 / 350 |
| Max. run time [h] | 2 / 4 / 10 / 26 / 4 |
| Beam distance [m] | 100 |
| Weight with battery pack (kg) | 0.1 |
| Kit included | 3 x AAA Batteries, Blister |
| Article Number | 4933471388 |

IPL-LED | ALKALINE PEN LIGHT

- 100 Lumens of TRUEVIEW™ high definition light output deliver up to 30 m beam distance for inspection tasks
- Impact and corrosion resistant aircraft aluminium body with knurling grip for best durability
- IP67 rated for submersion in up to 1 meter of water and protection from dust
- Features a protective rubber bite zone for occasional hands-free use
- Removable metal pocket clip
- On/off and momentary-on button
- Includes (2) AAA batteries



TRUEVIEW™ II 2 AA

| IPL-LED | |
|---|----------------------------|
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 100 |
| Max. run time [h] | 3 |
| Weight without battery pack (kg) | 0.04 |
| Kit included | 2 x AAA Batteries, Blister |
| Article Number | 4933459440 |

FL-LED | ALKALINE FLOOD LIGHT

- 300 Lumens of TRUEVIEW™ high definition output delivers consistent beam, optimised colour temperature and true representation of colours & details
- Can be mounted with double magnet and clipped on pockets
- Compact size and lightweight construction allows easy storage in pocket
- IP54 rating, light is protected from dust and splashing water
- Impact and chemical resistant lens for more durability
- Includes 2x AA alkaline batteries



TRUEVIEW™ II 2 AA

| FL-LED | |
|---|---------------------------|
| Battery compatibility | Alkaline |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 300 / - / 100 / - |
| Max. run time [h] | 5 / - / 16 / - |
| Weight with battery pack (kg) | 0.1 |
| Kit included | 2 x AA Batteries, Blister |
| Article Number | 4933464824 |

HL2-LED | ALKALINE SLIM HEADLAMP

- 350 Lumens of TRUEVIEW™ high definition output
- Washable micro fiber sweat-absorbing strap for all day comfort on the head
- Ultra compact and lightweight product
- 6-position tilt adjustment for directing light
- 4 mounting clips for securing to helmets
- Light is protected from impact as well as from weather and dust
- Includes (3) AAA batteries



NEW TRUEVIEW™ III 3 AAA

| HL2-LED | |
|---|----------------------------|
| Battery compatibility | Alkaline |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 350 / 150 / 25 / - |
| Max. run time [h] | 4 / 8.5 / 31 / - |
| Weight with battery pack (kg) | 0.1 |
| Kit included | 3 x AAA Batteries, Blister |
| Article Number | 4933471286 |

ML-LED | ALKALINE FLASHLIGHT

- 325 Lumens of TRUEVIEW™ high definition light output deliver up to 50 m beam distance for inspection tasks
- Impact and corrosion resistant aircraft aluminium body with knurling grip for best durability
- IP67 rated for submersion in up to 1 meter of water and protection from dust
- Removable metal pocket clip
- Impact and chemical resistant lens
- Includes 3x AAA batteries



TRUEVIEW™ III 3 AAA

| ML-LED | |
|---|----------------------------|
| Battery compatibility | Alkaline |
| Bulb type | LED |
| Max. light output High/Medium/Low/Strobe (Lumens) | 325 / - / 25 / - |
| Max. run time [h] | 5 / - / 18 / - |
| Beam distance [m] | 50 |
| Weight with battery pack (kg) | 0.13 |
| Kit included | 3 x AAA Batteries, Blister |
| Article Number | 4933464825 |

M28



M28 CHPX

M28 FUEL™ 4-MODE SDS-PLUS HAMMER WITH FIXTEC™ CHUCK

M28 FUEL
DRIVEN TO OUTPERFORM.

- Brushless POWERSTATE™ motor
- REDLINK PLUS™ intelligence system delivers an advanced digital overload protection for tool and battery and uniquely enhances the tool performance under load
- REDLITHIUM™ battery pack provides superior pack construction, electronics and fade-free performance to deliver more run time and more work over pack life
- High powered motor gives corded tool performance
- Hardest hitting cordless SDS hammer in its class. Powerful hammer mechanism: delivers 4.1 J of impact energy at low 8.1 m/s² vibrations thanks to the new dual rail anti-vibration system
- All metal gear case - optimum seating of the gears for enhanced service life
- 4-mode operation: rotary hammer, hammer only, rotation only and variolock for maximum versatility
- FIXTEC™ system - keyless chuck changing
- Individual battery cell monitoring optimises tool run time and ensures long term pack durability
- Fuel gauge displays remaining battery charge
- Compatible with M18-28 CPDEX dust extractor



Hardest hitting cordless hammer in its class - 4.1 J



Low vibrations at 8.1 m/s² due to the new dual-rail anti-vibration system



All metal gear case

| | M28 CHPX-0 | M28 CHPX-502C |
|---|---|---|
| Tool reception | SDS-Plus | SDS-Plus |
| Blow energy [EPTA][J] | 4.1 | 4.1 |
| Max. drilling wood (mm) | 30 | 30 |
| Max. drilling steel (mm) | 13 | 13 |
| Max. drilling concrete (mm) | 28 | 28 |
| Max. percussion rate (bpm) | 0 - 5000 | 0 - 5000 |
| Vibration drilling (m/s ²) | 8.1 | 8.1 |
| Vibration chiseling (m/s ²) | 8.1 | 8.1 |
| Weight with battery pack (kg) | - | 4.7 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied | 2 x 5.0 Ah Battery packs, M28 C Charger, Kitbox |
| Article Number | 4933448000 | 4933448833 |

M18-28 CPDEX | M18-28 FUEL™ SDS-PLUS DUST EXTRACTOR

M18 FUEL

- Designed to collect dust effectively with automatic operation from the tools on/off trigger switch
- HEPA filter: widely regarded as the ultimate filter that traps all sizes of particles with an efficiency rating of 99.75%
- Large dust collection box
- Dust extraction aluminium tube is adjustable according to the size of the drill bit and length 16 mm max and 90 mm depth
- Compatible with M18 CHPX & M28 CHPX
- Flexible battery system: works with all MILWAUKEE® M18™ batteries



| | M18-28 CPDEX-0 |
|----------------------------------|---|
| Max. drill bit diameter [mm] | 16 |
| Max. drilling depth [mm] | 90 |
| Max. drill bit length [mm] | 160 |
| Stroke length [mm] | 100 |
| Weight without battery pack (kg) | 1.6 |
| Kit included | No batteries supplied, No charger supplied, No kitbox or bag supplied |
| Article Number | 4933446810 |

CHARGERS
M12 **M18** **M28**

| | Catalogue product description | Charging ports | Charge type | Power source | Carry handle | Wall mountable | Article Number | |
|-----------------|---|-----------------|-------------|--------------|--------------|----------------|----------------|--|
| M12-18 FC | M12™ - M18™ fast charger | M12,M14,M18 | Sequential | AC | | ✓ | 4932451080 | |
| M12-18 AC | M12™-M18™ car charger | M12,M14,M18 | Sequential | DC | | ✓ | 4932459205 | |
| M18 HSAL-502B | M18™ high performance LED stand light charger | M18 | Single | AC | ✓ | | 4933451897 | |
| M18 ONESLDP-0 | M18™ ONE-KEY™ LED compact site light charger | M18 | Sequential | AC | ✓ | | 4933459161 | |
| M18 RC-0 | M18™ jobsite radio/charger with Bluetooth® | M18 | Single | AC | ✓ | | 4933446647 | |
| M1418 C6 - 110V | M14™ - M18™ multibay charger | M18 | Sequential | AC | ✓ | ✓ | 4932430087 | |
| M1418 C6 - 240V | M14™ - M18™ multibay charger | M18 | Sequential | AC | ✓ | ✓ | 4932430310 | |
| C12 C | M12™ charger | M12 | Single | AC | | ✓ | 4932352069 | |
| M12 C4 | M12™ 4 bay charger | M12 | Sequential | AC | | ✓ | 4932430555 | |
| L4 C | REDLITHIUM™ USB charger | REDLITHIUM™ USB | Single | AC, USB | | | 4932459446 | |
| M28 C | M28™ charger | M28 | Single | AC | | ✓ | 4932352525 | |

BATTERIES
M12 **M18** **M28**

| | Catalogue product description | Article Number | Charge time M12_18 FC charger | Charge time M12_18 C charger | Charge time M12_18 AC charger | Charge time M1418C6 charger | Charge time C12 C charger | Charge time M12 TC charger | Charge time M12 C4 charger | Charge time L4 C charger | Charge time M28 C charger | |
|----------|-----------------------------------|----------------|-------------------------------|------------------------------|-------------------------------|-----------------------------|---------------------------|----------------------------|----------------------------|--------------------------|---------------------------|--|
| M18 HB12 | M18™ HIGH OUTPUT™ 12.0 Ah battery | 4932464260 | 130 min | 250 min | 285 min | 270 min | - | - | - | - | - | |
| M18 HB8 | M18™ HIGH OUTPUT™ 8.0 Ah battery | 4932471070 | 87 min | 167 min | 190 min | 190 min | - | - | - | - | - | |
| M18 HB3 | M18™ HIGH OUTPUT™ 3.0 Ah battery | 4932471069 | 35 min | 65 min | 75 min | 70 min | - | - | - | - | - | |
| M18 B9 | M18™ 9.0 Ah battery | 4932451245 | 95 min | 180 min | 180 min | 180 min | - | - | - | - | - | |
| M18 B6 | M18™ 6.0 Ah battery | 4932451244 | 68 min | 124 min | 124 min | 124 min | - | - | - | - | - | |
| M18 B5 | M18™ 5.0 Ah battery | 4932430483 | 59 min | 100 min | 100 min | 100 min | - | - | - | - | - | |
| M18 B4 | M18™ 4.0 Ah battery | 4932430063 | 47 min | 80 min | 80 min | 80 min | - | - | - | - | - | |
| M18 B2 | M18™ 2.0 Ah battery | 4932430062 | 26 min | 40 min | 40 min | 40 min | - | - | - | - | - | |
| M12 B6 | M12™ 6.0 Ah battery | 4932451395 | 60 min | 130 min | 165 min | - | 130 min | 525 min | 130 min | - | - | |
| M12 B4 | M12™ 4.0 Ah battery | 4932430065 | 40 min | 80 min | 115 min | - | 80 min | 347 min | 80 min | - | - | |
| M12 B3 | M12™ 3.0 Ah battery | 4932451388 | 30 min | 70 min | 90 min | - | 70 min | 264 min | 70 min | - | - | |
| M12 B2 | M12™ 2.0 Ah battery | 4932430064 | 20 min | 40 min | 55 min | - | 40 min | 174 min | 40 min | - | - | |
| L4 B2 | REDLITHIUM™ USB battery | 4932459445 | - | - | - | - | - | - | - | 120 min | - | |
| M28 BX | M28™ 3.0 Ah battery | 4932352732 | - | - | - | - | - | - | - | - | 60 min | |
| M28 B5 | M28™ 5.0 Ah battery | 4932430484 | - | - | - | - | - | - | - | - | 90 min | |

CONSTRUCTION



K 2500 H | 25 KG CLASS 28 MM HEX BREAKING HAMMER

- Heavy Duty breaker provides 64 blow Joules of impact energy for toughest demolition applications
- Floating body anti-vibration technologies allows the user to work all day without reaching dangerous exposure levels
- Additional third handle gives maximum control when lifting the breaker between applications
- 1300 BPM provides maximum productivity in all applications
- Brushless motor allows for maximum run time in-between service intervals
- 10 m cable allows for a working area of up to 314 m²
- 28 mm Hex reception
- Separately available trolley with 4 chisel location and cable management makes it easy to transport breaker on the jobsite



| K 2500 H | |
|---|---------------------------|
| Power input (W) | 2500 |
| Blow energy [EPTA][J] | 64 |
| Full load hammer action (bpm) | 1300 |
| Tool reception | K-Hex |
| Vibration chiseling (m/s ²) | 4.9 |
| Weight (kg) | 27.3 |
| Supplied in | No kitbox or bag supplied |
| Article Number 110V | 4933459603 |

28 MM HEX POINTED CHISEL

Article Number 4932459774



K 1528 H | 16 KG CLASS 28 MM HEX BREAKING HAMMER

- Powerful and compact breaker delivering up to 39 blow Joules of impact energy for challenging applications
- Floating body anti-vibration technologies allows the user to work all day without reaching dangerous exposure levels
- 1560 BPM provides maximum productivity in all applications
- 6 m cable allows for working area over 110 m²
- Dedicated brush window for easy maintenance
- 28 mm Hex reception
- Service reminder light to indicate when service will be needed
- BMC with wheels for ease of transport on site



| K 1528 H | |
|---|--------------|
| Power input (W) | 2100 |
| Blow energy [EPTA][J] | 39 |
| Full load hammer action (bpm) | 1560 |
| Tool reception | K-Hex |
| Vibration chiseling (m/s ²) | 8.8 |
| Weight (kg) | 17.2 |
| Supplied in | Plastic case |
| Article Number 110V | 4933464119 |

28 MM HEX 400 X 35 MM FLAT CHISEL

Article Number 4932459775



K 1000 S | 10 KG CLASS SDS-MAX BREAKING HAMMER

- Compact chiseling hammer delivering up to 26 blow Joules of impact energy for a wide variety of applications
- Floating body anti-vibration technologies allows the user to work all day without reaching dangerous exposure levels
- 1400 – 1950 BPM provides maximum productivity in all applications
- 6 m cable allows for working area over 110 m²
- Variolock (12 positions) for selecting the most appropriate chisel angle
- SDS-Max tool reception
- Service reminder light to indicate when service will be needed
- Dedicated brush window for easy maintenance
- BMC with wheels for ease of transport on site



| K 1000 S | |
|---|--------------|
| Power input (W) | 1750 |
| Blow energy [EPTA][J] | 26 |
| Full load hammer action (bpm) | 1400 - 1950 |
| Tool reception | SDS-Max |
| Vibration chiseling (m/s ²) | 6.7 |
| Weight (kg) | 12.7 |
| Supplied in | Plastic case |
| Article Number 110V | 4933464121 |

PCHDE DUST EXTRACTOR WITH 400 MM LONG SDS-MAX POINTED CHISEL

Article Number 4932455280



K 950 | 10 KG CLASS DRILLING AND BREAKING HAMMER

- 20 J blow energy for hard hitting performance
- 1700 watt motor - best in class with plenty in reserve for the toughest applications
- DIGITRONIC™ - fullwave electronics for precise power adjustment to application
- 3 handles - all with AVS (Anti-Vibration-System) and soft grip for comfortable and less tiring use
- All metal gearcase - optimum seating of the gears for enhanced service life
- Service indicator light
- Automatic lubrication system for longer life time
- In-Line motor design for more comfort in below waist applications
- Ideal for usage with generators
- Variolock (12 positions) for selecting the most appropriate chisel angle
- 6 m cable



| K 950 S | |
|---|------------|
| Power input (W) | 1700 |
| No load speed (rpm) | 125 - 250 |
| Blow energy [EPTA][J] | 20 |
| Full load hammer action (bpm) | 975 - 1950 |
| Full load speed (soft hammer) (rpm) | 125 - 250 |
| Max. drilling solid bit (mm) | 50 |
| mx. drilling tunnel bit (mm) | 80 |
| Max. drilling core bit (mm) | 150 |
| Tool reception | SDS-Max |
| Vibration drilling (m/s ²) | 12.5 |
| Vibration chiseling (m/s ²) | 11 |
| Weight (kg) | 11.8 |
| Supplied in | Kitbox |
| Article Number 110 V | 4933375752 |
| Article Number 240 V | 4933449400 |

K 900 | 10 KG CLASS BREAKING HAMMER

- 20 J blow energy for hard hitting performance
- 1600 watt motor - best in class with plenty in reserve for the toughest applications
- DIGITRONIC™ - fullwave electronics for precise power adjustment to application
- 3 handles - all with AVS (Anti-Vibration-System) and soft grip for comfortable and less tiring use
- Service indicator light
- Automatic lubrication system for longer life time
- In-Line motor design for more comfort in below waist applications
- Ideal for usage with generators
- Variolock (12 positions) for selecting the most appropriate chisel angle
- 6 m cable



| | K 900 S | K 900 K |
|---|------------|------------|
| Power input (W) | 1600 | 1600 |
| Blow energy [EPTA][J] | 20 | 20 |
| Full load hammer action (bpm) | 975 - 1950 | 975 - 1950 |
| Tool reception | SDS-Max | K-Hex |
| Vibration chiseling (m/s ²) | 11 | 11 |
| Weight (kg) | 11.0 | 11.0 |
| Supplied in | Kitbox | Kitbox |
| Article Number 110 V | 4933375756 | 4933375670 |
| Article Number 240 V | 4933449390 | 4933409258 |

PCHDE DUST EXTRACTOR WITH 400 MM LONG SDS-MAX POINTED CHISEL

Article Number 4932455280



K 750 S | 7 KG CLASS DRILLING AND BREAKING HAMMER

- Large, heavy weight striker delivers maximum 11.9 J impact energy
- Powerful 1550 watt ensures maximum power yet due to better heat dissipation, guarantees maximum possible durability
- Fullwave electronics for precise power adjustment to application
- Soft start for precise start of drilling/chiselling
- AVS (Anti-Vibration-System) and soft grip on front and back handle
- Additional handle can be fixed in 3 different positions
- Soft hammer mode reduces blow energy for chiselling in sensitive materials
- Roto-stop and multi-position chisel function
- Service indicator light
- Variolock (12 positions) for selecting the most appropriate chisel angle
- 6 m cable



| K 750 S | |
|---|------------|
| Power input (W) | 1550 |
| No load speed (rpm) | 300 |
| Blow energy [EPTA][J] | 11.9 |
| Full load hammer action (bpm) | 2740 |
| Full load speed (soft hammer) (rpm) | 240 |
| Max. drilling solid bit (mm) | 50 |
| mx. drilling tunnel bit (mm) | 80 |
| Max. drilling core bit (mm) | 150 |
| Tool reception | SDS-Max |
| Vibration drilling (m/s ²) | 9.5 |
| Vibration chiseling (m/s ²) | 9.1 |
| Weight (kg) | 8.2 |
| Supplied in | Kitbox |
| Article Number 110 V | 4933398601 |
| Article Number 240 V | 4933449370 |

K 545 S | 5 KG CLASS DRILLING AND BREAKING HAMMER

- Large, heavy weight striker delivers maximum 8.5 J impact energy
- Powerful 1300 watt ensures maximum power yet due to better heat dissipation, guarantees maximum possible durability
- Constant electronic for keeping the speed uniform even under load
- Soft start for precise start of drilling/chiselling
- AVS (Anti-Vibration-System) and soft grip on front and back handle
- Additional handle can be fixed in 3 different positions
- Soft hammer mode reduces blow energy for drilling/chiselling in sensitive materials
- Roto-stop and multi-position chisel function
- Service indicator light
- Variolock (12 positions) for selecting the most appropriate chisel angle
- 6 m cable



| K 545 S | |
|---|------------|
| Power input (W) | 1300 |
| No load speed (rpm) | 450 |
| Blow energy [EPTA][J] | 8.5 |
| Full load hammer action (bpm) | 2840 |
| Full load speed (soft hammer) (rpm) | 350 |
| Max. drilling solid bit (mm) | 45 |
| mx. drilling tunnel bit (mm) | 65 |
| Max. drilling core bit (mm) | 100 |
| Tool reception | SDS-Max |
| Vibration drilling (m/s ²) | 13 |
| Vibration chiseling (m/s ²) | 9 |
| Weight (kg) | 6.7 |
| Supplied in | Kitbox |
| Article Number 110 V | 4933398280 |
| Article Number 240 V | 4933405347 |

K 540 S | 5 KG CLASS DRILLING AND BREAKING HAMMER

- Best power to weight ratio in its class - 7.5 J and 6.3 kg
- Powerful 1100 watt ensures maximum power, guarantees maximum possible durability
- Soft start for precise start of drilling/chiselling
- Low vibration construction enhances usage time per day
- Robust magnesium gear housing for tough environments, exact seat fitting of gear components and better cooling
- Roto-stop and multi position chisel function gives 12 different positions to optimise working angle
- Safety clutch protects operator and machine if drill bit jams
- Soft grip main side handle
- Variolock (12 positions) for selecting the most appropriate chisel angle
- 4 m cable



| K 540 S | |
|---|------------|
| Power input (W) | 1100 |
| No load speed (rpm) | 450 |
| Blow energy [EPTA][J] | 7.5 |
| Full load hammer action (bpm) | 3000 |
| Full load speed (soft hammer) (rpm) | 430 |
| Max. drilling concrete (mm) | 40 |
| mx. drilling tunnel bit (mm) | 65 |
| Max. drilling core bit (mm) | 105 |
| Tool reception | SDS-Max |
| Vibration drilling (m/s ²) | 16.8 |
| Vibration chiseling (m/s ²) | 16.7 |
| Weight (kg) | 6.3 |
| Supplied in | Kitbox |
| Article Number 110 V | 4933418140 |
| Article Number 240 V | 4933418120 |

K 500 ST | 5 KG CLASS TRADESMAN BREAKING HAMMER

- Best power to weight ratio in its class - 7.5 J and 5.9 kg
- Powerful 1100 watt ensures maximum power, guarantees maximum possible durability
- Soft start for precise start of chiselling
- Low vibration construction enhances usage time per day
- Robust magnesium gear housing for tough environments, exact seat fitting of gear components and better cooling
- Roto-stop and multi position chisel function gives 12 different positions to optimise working angle
- Safety clutch protects operator and machine if drill bit jams
- Soft grip main side handle
- Variolock (12 positions) for selecting the most appropriate chisel angle
- 4 m cable



| K 500 ST | |
|---|------------|
| Power input (W) | 1100 |
| Blow energy [EPTA][J] | 7.5 |
| Full load hammer action (bpm) | 3000 |
| Tool reception | SDS-Max |
| Vibration chiseling (m/s ²) | 16.7 |
| Weight (kg) | 5.9 |
| Supplied in | Kitbox |
| Article Number 110 V | 4933443345 |
| Article Number 240 V | 4933443920 |

K 500 S | 5 KG CLASS BREAKING HAMMER

- Large, heavy weight striker delivers maximum 8.5 J impact energy
- Powerful 1300 watt ensures maximum power yet due to better heat dissipation, guarantees maximum possible durability
- Constant electronic for keeping the speed uniform even under load
- Soft start for precise start of chiselling
- AVS (Anti-Vibration-System) and soft grip on front and back handle
- Additional handle can be fixed in 3 different positions
- Soft hammer mode reduces blow energy for chiselling in sensitive materials
- Roto-stop and multi-position chisel function
- Service indicator light
- Variolock (12 positions) for selecting the most appropriate chisel angle
- 6 m cable



| K 500 S | |
|---|------------|
| Power input (W) | 1300 |
| Blow energy [EPTA][J] | 8.5 |
| Full load hammer action (bpm) | 2840 |
| Tool reception | SDS-Max |
| Vibration chiseling (m/s ²) | 11.5 |
| Weight (kg) | 6.3 |
| Supplied in | Kitbox |
| Article Number 110 V | 4933398290 |
| Article Number 240 V | 4933449375 |

REPLACEMENT 400 MM LONG SDS-MAX POINTED CHISEL

Article Number 4932455144



DD 3-152 | 3-SPEED COMBI DIAMOND DRILL

- Powerful 1900 watt motor
- Optimum speed range to drive small and large core bits
- Soft start with stepless speed control
- LED thermal motor temperature protection indicator
- Safety clutch
- Quick-in connection - secure motor fixing connection for ease of use and minimum vibration
- L shaped handle for better weight distribution
- 3-speed gearbox
- 5 m cable with PRC
- Supplied with dust extraction connector, 32 mm and 41 mm spanners



| DD 3-152 | |
|-----------------------------|-------------------|
| Power input (W) | 1900 |
| Full load speed (rpm) | 550 / 1250 / 2700 |
| Max. drilling concrete (mm) | 152 |
| Max. drilling masonry (mm) | 202 |
| Tool reception | ½" G + 1 ¼" UNC |
| Weight (kg) | 6.5 |
| Supplied in | Kitbox |
| Article Number 110 V | 4933431530 |
| Article Number 240 V | 4933428000 |

DR 152 T | DIAMOND DRILL STAND FOR DD 3-152

- Cast aluminium base for easy transportation
- 45° tilt for angle drilling
- Quick-in connection - precise and quick connection of tool and rig
- Compact base - saves space for drilling in confined spaces
- 4 leveling screws for fast adjustment
- Horizontal and vertical spirit levels
- Transport handle
- Locking knob locks unit at highest position to aid fixing of machine and core bit
- Two spoke wheel feed for left and right hand operation
- Vacuum plate is available as accessory (4932352676)



| DR 152 T | |
|-----------------------------|---------------------------|
| Max. drilling core bit (mm) | 152 |
| Base size (mm) | 330 x 210 |
| Angle capacity (°) | 45 |
| Weight (kg) | 10 |
| Supplied in | No kitbox or bag supplied |
| Article Number | 4933428020 |

VACUUM PLATE

Article Number 4932352676



DD 2-160 XE | 2-SPEED DRY DIAMOND DRILL

- Powerful robust motor delivers constant high torque
- Dual protection from the interlinked mechanical and electronic clutches to protect both user and tool
- Robust construction with metal gearbox
- Safe handling from the long AVS side handle and "D- shaped" back handle
- 2-speed gear box
- M16 FIXTEC™ adaptor for fast core bit changing
- Soft hammer action - when activated allows the core bit to cut faster and easier
- Soft start via accelerator switch for precision and controlled drilling
- FIXTEC™ Cleanline rotor (additional accessory) the best solution for dust extraction
- 4 m cable
- Supplied with quick change adaptor for M16 diamond cores, SDS-plus pilot drill bit (8 x 140 mm)



| DD 2-160 XE | |
|----------------------------------|---------------------|
| Power input (W) | 1500 |
| No load speed (rpm) | 0 - 1500 / 0 - 3000 |
| Full load speed (rpm) | 0 - 890 / 0 - 1770 |
| No load hammer stroke (rpm) | 24,000 / 48,000 |
| Max. drilling masonry (mm) | 162 |
| Max. static stalling torque (Nm) | 50 |
| Tool reception | M18 x 2.5 |
| Weight (kg) | 4.2 |
| Supplied in | Kitbox |
| Article Number 110 V | 4933368700 |
| Article Number 240 V | 4933368705 |

FIXTEC™ CLEAN LINE ROTOR (CLR) FITS TO DIAMOND CORES WITH 1 1/4" UNC THREAD. THE ADDED ADVANTAGE OF DUST ABSORPTION ALLOWS DRILLING SPEED TO BE INCREASED AND EXTENDS THE LIFETIME OF THE DIAMOND CORES



Article Number 4932352172

DCM 2-350 C | DIAMOND DRILLING MOTOR

- Two-speed diamond coring motor
- Internal slip clutch
- Triple-reduction gearing
- Soft start switch
- Motor overload protection
- PRCD residual current device
- Built-in water swivel
- Dual-mount switch box
- Supplied with open end wrench, Hex keys and strap with switch box



| DCM 2-350 C | |
|-----------------------------|---------------------------|
| Power input (W) | 2800 |
| No load speed gear 1 (rpm) | 300 |
| No load speed gear 2 (rpm) | 600 |
| Max. drilling core bit (mm) | 350 |
| Tool reception | 1 1/4" UNC |
| Weight (kg) | 9.0 |
| Supplied in | No kitbox or bag supplied |
| Article Number 240 V | 40044 |

DR 350 T | DIAMOND DRILL STAND FOR DCM 2-350 C

- Light weight drilling rig from aluminium
- Tilting (0 - 45°)
- Drill angle and depth display
- Quick-connect motor plate
- Fine adjustment of feed speed
- Vertical and horizontal water level
- Drill hole centering device
- Leveling screws
- Feed handle attachable to both sides of rig
- Transportable handle & wheels
- Supplied with 3/16" Hex key, 6 mm Hex key, 17 x 19 wrench, quick-connect motor plate, 4 pcs. M8 x 25 mm screws, centering device



| DR 350 T | |
|-----------------------------|---------------------------|
| Max. drilling core bit (mm) | 350 |
| Stroke length (mm) | 610 |
| Height (mm) | 1042 |
| Base size (mm) | 391 x 523 |
| Angle capacity (°) | 45 |
| Weight (kg) | 19.5 |
| Supplied in | No kitbox or bag supplied |
| Article Number 240 V | 4933400600 |

WATER COLLECTION RING FOR USE WITH DRILL RIG DR 350 T. FOR USE WITH MAX. Ø 300 MM CORE BITS



Article Number 4932399728

DCM 2-250 C | DIAMOND DRILLING MOTOR

- Two-speed diamond coring motor
- Internal slip clutch
- Triple-reduction gearing
- Soft start switch
- Motor overload protection
- PRCD residual current device
- Built-in water swivel
- Dual-mount switch box
- Supplied with open end wrench, Hex keys and strap with switch box



| DCM 2-250 C | |
|-----------------------------|---------------------------|
| Power input (W) | 2800 |
| No load speed gear 1 (rpm) | 450 |
| No load speed gear 2 (rpm) | 900 |
| Max. drilling core bit (mm) | 250 |
| Tool reception | 1 1/4" UNC |
| Weight (kg) | 9.0 |
| Supplied in | No kitbox or bag supplied |
| Article Number 240 V | 40964 |

DR 250 TV | DIAMOND DRILL STAND FOR DCM 2-250 C

- Light weight drilling rig from aluminium
- Tilting (0 - 45°)
- Drill angle and depth display
- Quick-connect motor plate
- Integrated vacuum base plate (use with and without vacuum possible)
- Fine adjustment of feed speed
- Vertical and horizontal water level
- Drill hole centering device
- Leveling screws
- Feed handle attachable to both sides of rig
- Supplied with 3/16" Hex key, 6 mm Hex key, 17 x 19 wrench, quick-connect motor plate, 4 pcs. M8 x 25 mm screws, centering device, vacuum rubber seal



| DR 250 TV | |
|-----------------------------|---------------------------|
| Max. drilling core bit (mm) | 250 |
| Stroke length (mm) | 520 |
| Height (mm) | 834 |
| Base size (mm) | 276 x 467 |
| Angle capacity (°) | 45 |
| Weight (kg) | 10.0 |
| Supplied in | No kitbox or bag supplied |
| Article Number | 4933400590 |

WCE 30 | 1500 W 125 MM (30 MM DOC) WALL CHASER

- Powerful 1500 watt motor
- Ideal for the installation of conduit for electrical cables
- High performance electronics with overload protection
- Current limitation for soft start
- Easily adjustable cutting width
- In-line dust extraction connection
- Supplied with 2 diamond discs, special chisel, keys, bayonet adaptor



| WCE 30 | |
|----------------------|------------|
| Power input (W) | 1500 |
| No load speed (rpm) | 9500 |
| Disc diameter (mm) | 125 |
| Cutting width (mm) | 26 |
| Cutting depth (mm) | 30 |
| Spindle size | M 14 |
| Weight (kg) | 4.3 |
| Supplied in | Kitbox |
| Article Number 110 V | 4933383860 |
| Article Number 240 V | 4933449385 |

METALWORKING



AGV 22 | 2200 W ANGLE GRINDER WITH AVS

- Powerful, 2200 W motor with powder field coating for long life time and outstanding performance in all applications
- Extreme compact design with an overall short length of 485 mm and 5.4 kg for most comfortable handling
- Soft start for smooth start up
- Burst resistant quick release safety guard for easy adjustment
- 2-positions Anti-vibration side handle for less vibrations to the user and more comfortable work
- External brush doors for easy access to the brushes for fast servicing
- 4 m rubber cable



AGV 22-230 DMS

| | |
|------------------------|---------------------------|
| Power input (W) | 2200 |
| No load speed (rpm) | 6600 |
| Disc diameter (mm) | 230 |
| Cutting depth (mm) | 68 |
| Spindle size | M 14 |
| Weight (kg) | 5.4 |
| FIXTEC™ flange nut | No |
| Deadman switch | Yes |
| Line lock out function | No |
| Autobalancer system | No |
| AVS side handle | Yes |
| Rotatable main handle | No |
| Supplied in | No kitbox or bag supplied |
| Article Number 110V | 4933440915 |
| Article Number 240V | 4933440910 |

DUST GUARD FOR CUTTING.

Article Number 4932459341



AGV 17 1750 W ANGLE GRINDER WITH AVS

- Powerful, 1750 W PROTECTOR-MOTOR with epoxy resin coated field and Heavy Duty winding protection for increased life time of tool
- Constant power electronics with soft start for smooth start up
- Line lock out function to prevent automatic start up after power breakdown
- Thermal overload protection to prevent overheating
- Safety clutch to protect the user from kickback injuries
- FIXTEC™ nut for tool-free disc change
- Burst resistant and tool-free safety guard for best user protection and fast adjustment
- Anti-vibration side handle for lower vibration
- 4 m rubber cable



PROTECTOR-MOTOR with epoxy resin coated field and Heavy Duty winding protection



Anti-vibration side handle for lower vibration



Electronics

| | |
|------------------------|---------------------------|
| AGV 17-125 XE | |
| Power input (W) | 1750 |
| No load speed (rpm) | 2600 - 11,000 |
| Disc diameter (mm) | 125 |
| Cutting depth (mm) | 33 |
| Spindle size | M 14 |
| Weight (kg) | 2.8 |
| Variable speed | Yes |
| FIXTEC™ flange nut | Yes |
| Deadman switch | No |
| Line lock out function | Yes |
| AVS side handle | Yes |
| Autobalancer system | No |
| Supplied in | No kitbox or bag supplied |
| Article Number 110V | 4933449660 |

AGV 13 XSPDE | 1250 W ANGLE GRINDER WITH AVS AND SLIM PADDLE SWITCH

- Powerful, 1250 W PROTECTOR-MOTOR with epoxy resin coated field and Heavy Duty winding protection for increased life time of tool
- Most compact design with only 160 mm body size for comfortable handling
- Soft start for smooth start up
- Line lock out function to prevent automatic start up after power breakdown
- Overload protection to prevent overheating
- Safety clutch to protect the user from kickback injuries
- Integrated and innovative FIXTEC™ tool-free disc change system
- Burst resistant and tool-free quick release safety guard for fast adjustment



AGV 13-115 XSPDE

| | |
|------------------------|---------------------------|
| Power input (W) | 1250 |
| No load speed (rpm) | 12,000 |
| Disc diameter (mm) | 115 |
| Cutting depth (mm) | 33 |
| Spindle size | M 14 |
| Weight (kg) | 2.4 |
| FIXTEC™ | Yes |
| Deadman switch | Yes |
| Line lock out function | Yes |
| AVS side handle | Yes |
| Switch type | Paddle switch |
| Supplied in | No kitbox or bag supplied |
| Article Number 110V | 4933451579 |
| Article Number 240V | 4933459104 |

DUST GUARD FOR CUTTING Ø115 - 125 MM AG(V) 12, AGV 13, AGV 15 SERIES AND FUEL™ GRINDERS.

Article Number 4932430467



AGV 10 EK | 1000 W ANGLE GRINDER WITH AVS

- Powerful, 1000 W motor for strong performance in all applications
- Extreme compact design with an overall short length of 276 mm and 2.2 kg for most comfortable handling
- Line lock out function to prevent automatic start up after power breakdown
- Soft start for smooth start up
- Anti-vibration side handle for less fatigue
- Burst resistant and tool-free quick release safety guard for fast adjustment
- Ramped slide switch for easy start up, even when wearing gloves
- 4 m cable



AGV 10-115 EK AGV 10-125 EK

| | | |
|------------------------|---------------------------|---------------------------|
| Power input (W) | 1000 | 1000 |
| No load speed (rpm) | 11,000 | 11,000 |
| Disc diameter (mm) | 115 | 125 |
| Cutting depth (mm) | 28 | 33 |
| Spindle size | M 14 | M 14 |
| Weight (kg) | 2.2 | 2.2 |
| FIXTEC™ flange nut | No | No |
| Line lock out function | Yes | Yes |
| Supplied in | No kitbox or bag supplied | No kitbox or bag supplied |
| Article Number 110V | 4933451224 | 4933451516 |
| Article Number 240V | 4933451223 | - |

THIN METAL CUTTING DISC PRO+, SCS 41 / 125, 1 MM THICKNESS, 22.2 MM BORE SIZE

Article Number 4932451487



AG 800 E | 800 W ANGLE GRINDER

- Powerful 800 Watt motor for various applications with only 2.0 kg of weight for comfortable use during longer working periods
- Very compact and slim body grip design with only 194 mm for most comfortable handling
- Line lock out function to prevent automatic start up after power breakdown
- Soft start for smooth start up
- Durable steel gears for long life time
- Protected air inlets for improved cooling
- Flat metal gear head for excellent visibility of workpiece, optimised cutting depth and work in restricted areas



AG 800-115 E

| | |
|------------------------|---------------------------|
| Power input (W) | 800 |
| No load speed (rpm) | 11,500 |
| Disc diameter (mm) | 115 |
| Cutting depth (mm) | 28 |
| Spindle size | M 14 |
| Weight (kg) | 2.0 |
| FIXTEC™ flange nut | No |
| Line lock out function | Yes |
| Supplied in | No kitbox or bag supplied |
| Article Number 110V | 4933451215 |
| Article Number 240V | 4933451214 |

THIN METAL CUTTING DISC PRO+, SCS 41 / 125, 1 MM THICKNESS, 22.2 MM BORE SIZE

Article Number 4932451487



AP 12 E | 1200 W POLISHER WITH ELECTRONIC VARIABLE SPEED

- 1200 watt motor
- Ergonomic design for long work shifts
- Special gear for high spindle torque and ideal polishing speed
- Variable speed selection for ideal speed
- Thermal overload protection
- No load speed limitation
- 6 m cable



| AP 12 QE | |
|----------------------|---------------------------|
| Power input (W) | 1200 |
| No load speed (rpm) | 900 - 2500 |
| Disc diameter (mm) | 150 |
| Spindle size | M 14 |
| Weight (kg) | 2.2 |
| Variable speed | Yes |
| Supplied in | No kitbox or bag supplied |
| Article Number 240 V | 4933449380 |

POLISHING SPONGE HARD. POLISH UP OF WEATHER-BEATEN LACQUER, LACQUER RE-CONDITIONING

Article Number 4932373165



AP 14-2 200 E | 1450 W POLISHER

- Powerful 1450 watt motor for high performance polishing
- Premium high torque gear maintains speed under load
- Variable speed selection from 490 - 2100 RPM for all applications
- 7 speed settings for accurate speed selection
- Thermal overload protection to prevent overheating
- Unique "finger grip" for comfortable working position, especially when working with the tool vertically
- Protected spindle lock button ensures against accidental use
- Lock-on function
- Flexible and soft hook and loop backing pad avoids scratches on paint work
- 6 m long PUR cord to prevent marks on the paint work and allows the user to work easily around the complete car



| | AP 14-2 200 E | AP 14-2 200 E SET |
|------------------------|-----------------------------------|---|
| Power input (W) | 1450 | 1450 |
| No load speed (rpm) | 490 - 2100 | 490 - 2100 |
| Disc diameter (mm) | 200 | 200 |
| Spindle size | M 14 | M 14 |
| Standard equipment | Side handle, flexible backing pad | Side handle, flexible backing pad, soft & hard polishing sponge, lambswool pad, sanding & finishing compound, cloth |
| Weight (kg) | 2.3 | 2.3 |
| Variable speed | Yes | Yes |
| Line lock out function | Yes | Yes |
| Soft start function | Yes | Yes |
| Supplied in | No kitbox or bag supplied | HD Box |
| Article Number | 4933442350 | 4933442355 |

MCS 66 | DRY CUT METAL CIRCULAR SAW

- Powerful 1800 watt, 4000 rpm motor
- Dry-cutting technology provides fast, clean and burr-free metal cutting
- Cuts steel, stainless steel, aluminium, insulated foam panel
- Large cutting depth of 66 mm
- Exclusive chip-release shield latch for fast waste disposal and blade changing
- Plunge lever for fast and effective plunge cuts
- Supplied with 42 tooth cermet tipped blade



| MCS 66 | |
|-----------------------------|------------|
| Power input (W) | 1800 |
| No load speed (rpm) | 4000 |
| Blade diameter (mm) | 203 |
| Max. cutting depth 90° (mm) | 66 |
| Bore size (mm) | 15.87 |
| Weight (kg) | 6.4 |
| Supplied in | Kitbox |
| Article Number 240 V | 4933440615 |

CIRCULAR SAW BLADE FOR METAL, 50 TOOTH, 1.8 MM CUTTING WIDTH FOR 1 - 2.5 MM MATERIAL THICKNESS

Article Number 48404520



BS 125 DEEP CUT BAND SAW

- Powerful 1100 watt motor provides maximum performance and durability
- Largest cutting capacity up to 125 x 125 mm material diameter
- 4 step variable speed selection from 0 - 116 m/min
- Constant power technology maintains cut speed in the toughest applications for optimal performance
- Gear protecting clutch extends gear and motor life by absorbing high impact forces caused by blade lock-ups
- Slim full metal motor housing design and LED work surface illumination for best cut visibility
- Tool-free blade locking mechanism for quick and easy saw blade changes
- Tool-free adjustable shoe



Largest cutting capacity up to 125 x 125 mm material diameter



4 step variable speed selection



Tool-free blade locking mechanism

| BS 125 | |
|-----------------------------------|------------|
| Power input (W) | 1100 |
| No load speed [m/min] | 0 - 116 |
| Cutting capacity rect. stock (mm) | 125 x 125 |
| Max. cutting capacity metal pipe | 125 |
| Blade length (mm) | 1139.83 |
| Weight (kg) | 6.5 |
| Supplied in | Kitbox |
| Article Number 110V | 4933448255 |
| Article Number 240V | 4933448860 |

BANDSAW COVER FOR M18 CBS125 & BS 125

Article Number 4932471459



CHS 355 | 2300 W CHOPSAW

- 2300 watt motor with 3800 rpm for excellent cutting performance
- Lock pin function keeps the saw closed position during transportation (no chain required)
- Quick release vice adjustment for fast angle adjustment from -45° to +45°
- Quick release mitre clamp for fast work piece change
- Spindle lock for fast and easy disc change
- Easy brush change due to external brush doors
- Integrated metal fan for best durability and long life
- Stamped steel base with additional ribs to prevent deforming



| CHS 355 | |
|---|---------------------------|
| Power input (W) | 2300 |
| No load speed (rpm) | 3800 |
| Wheel size (mm) | 355 |
| Cutting capacity round profile 90° and 45° (mm) | 125 / 100 |
| Cutting cap. square profile 90° and 45° (mm) | 115 / 80 |
| Cutting capacity rectangle 90° and 45° (mm) | 230 x 70 / 100 x 80 |
| Cutting cap. L-shape profile 90° and 45° (mm) | 130 / 80 |
| Bore size (mm) | 25.4 |
| Weight (kg) | 18 |
| Supplied in | No kitbox or bag supplied |
| Article Number 240 V | 4933410355 |

METAL CUTTING DISC (10 PCS MQ), Ø 355 MM, Ø 25.4 MM BORE SIZE, 2.5 MM THICKNESS

Article Number 4932451505



WOODWORKING



SSPE 1500 X

1500 W SUPER SAWZALL™

- 1500 W motor - highest overload protection in the industry; prevents motor burn up/failure
- Constant power technology - maintains constant speed under load for unmatched cutting performance
- Patented gear protecting clutch - extends gear and motor life by absorbing high impact forces caused by sudden blade lock-ups
- FIXTEC™ blade clamp system - provides fast and easy blade changes
- Patented AVS Anti-Vibration-System ensures unsurpassed low-vibration running at 12.5 m/s²
- Variable speed trigger and dial speed control - maximum speed control
- Adjustable shoe for optimised use of saw blades
- Supplied with a SAWZALL™ blade, additional keyed blade clamp and 4 m cable

| SSPE 1500 X | |
|---------------------------|------------|
| Power input (W) | 1500 |
| No load stroke rate (spm) | 0 - 2800 |
| Stroke length (mm) | 32 |
| Weight (kg) | 4.5 |
| Supplied in | Kitbox |
| Article Number 110 V | 4933429145 |
| Article Number 240 V | 4933429140 |



AX™ CARBIDE TEETH DEMOLITION BLADE, 230 MM BLADE LENGTH, 5 TPI

Article Number **48005226**



FIXTEC™ blade clamp system & adjustable shoe



Counter balance mechanism ensures low vibrations - 12.5 m/s²



Orbital action

SSD 1100 X | 1100 W SAWZALL™

- High cutting performance due to powerful 1100 watt motor combined with a 28 mm saw stroke
- FIXTEC™ blade clamp for fast and easy blade changes without any key
- Water & finger protection nose for safer work and better rust protection
- Variable speed trigger switch
- Durable long lasting slider mechanism
- Supplied with a SAWZALL™ blade and 4 m cable



| SSD 1100 X | |
|---------------------------|------------|
| Power input (W) | 1100 |
| No load stroke rate (spm) | 0 - 2900 |
| Stroke length (mm) | 28 |
| Weight (kg) | 3.2 |
| Supplied in | Kitbox |
| Article Number 110 V | 4933429000 |
| Article Number 240 V | 4933410780 |

SAWZALL® BLADE SET

Article Number **49222229**



JSPE 135 | HEAVY DUTY TOP HANDLE JIGSAW

- Robust and powerful top handle jig saw for fast cutting action in wood, aluminium, steel or ceramics
- Powerful 750 W motor
- Precision blade guidance for precise cuts
- Patented FIXTEC™ system for fast keyless blade change and bevel adjustment with snap-in at 0° and 45°
- Electronic with variable speed preselection, soft start and constant speed under load
- Four-stage pendulum action adjustment for even more powerful cutting performance and longer saw blade life
- Adjustable chipping blower to the front and the rear
- LED light for illumination of cutting area
- Supplied with 5 saw blades, anti-splintering device, dust cap, absorption adaptor, sliding shoe and 4 m cable



| JSPE 135 TX | |
|--------------------------------------|------------|
| Power input (W) | 750 |
| No load stroke rate (spm) | 800 - 3000 |
| Max. cutting capacity wood (mm) | 135 |
| Max. cutting capacity steel (mm) | 10 |
| Max. cutting capacity aluminium (mm) | 30 |
| Mitre capacity (°) | 45 |
| Stroke length (mm) | 26 |
| Weight (kg) | 2.5 |
| Supplied in | Kitbox |
| Article Number 110 V | 4933381645 |
| Article Number 240 V | 4933381640 |

75 X 2.5 MM T 101 B JIGSAW BLADE, 5 PCS

Article Number **4932254061**



CS 85 SB | 235 MM CIRCULAR SAW (85 MM DOC)

- 2200 Watt motor allows smooth cutting at full depth of cut
- Soft start minimises the tripping of circuit breakers
- Dust extraction DEK26 compatible
- Integrated cable hatch, the cable can be replaced easily without the need to dismantle the whole saw
- Aluminium stamped base for strength and durability
- Spindle lock for easy and quick blade change



| CS 85 SB | |
|-----------------------------|---------------------------|
| Power input (W) | 2200 |
| No load speed (rpm) | 4500 |
| Blade diameter (mm) | 235 |
| Bevel capacity (°) | 50 |
| Max. cutting depth 45° (mm) | 67 |
| Max. cutting depth 90° (mm) | 85 |
| Bore size (mm) | 30 |
| Weight (kg) | 6.6 |
| Supplied in | No kitbox or bag supplied |
| Article Number 110 V | 4933451118 |
| Article Number 240 V | 4933451129 |

235 X 30 MM 36 TOOTH CIRCULAR SAW BLADE WITH 2.4 MM CUTTING WIDTH

Article Number **4932471306**



CS 85 CBE

235 MM CIRCULAR SAW (85 MM DOC)

- 2200 Watt motor allows smooth cutting at full depth of cut
- 60° bevel capacity gives the saw the ability to achieve a wide range of roofing cuts
- Sprung loaded riving knife allows the saw to be plunged into the material without the removal of the riving knife
- Guide rail compatible, the saw can be used in conjunction with a guide rail
- Soft start minimises the tripping of circuit breakers
- Brake stops the saw in 3.5 seconds
- Double fence is anchored at the front and the back of the saw allowing for greater accuracy
- Dust extraction DEK26 compatible
- Integrated cable hatch, the cable can be replaced easily without the need to dismantle the whole saw



60° bevel capacity



Sprung loaded riving knife



Double fence is anchored at the front and the back of the saw

| CS 85 CBE | |
|-----------------------------|------------|
| Power input (W) | 2200 |
| No load speed (rpm) | 4500 |
| Blade diameter (mm) | 235 |
| Bevel capacity (°) | 60 |
| Max. cutting depth 45° (mm) | 67 |
| Max. cutting depth 90° (mm) | 85 |
| Bore size (mm) | 30 |
| Weight (kg) | 7.7 |
| Supplied in | Kitbox |
| Article Number 240V | 4933459032 |

235 X 30 MM 48 TOOTH CIRCULAR SAW BLADE WITH 2.4 MM CUTTING WIDTH

Article Number **4932471307**



CS 60 | 184 MM CIRCULAR SAW (61 MM DOC)

- 1600 W powerful motor with 5800 rpm for fast cutting through tough materials
- Large cutting capacity of 61 mm
- 0 - 56° bevel capacity and 45° positive stop
- Quick release locking lever design for fast bevel adjustments
- Integrated dust blower keeps cut line clear
- Large, ergonomic handles and levers for improved ergonomics and control
- Long side fence for straight cuts and precise guidance
- Supplied with a carbide tipped 24 tooth saw blade, parallel guide and 4 m cable



| CS 60 | |
|-----------------------------|---------------------------|
| Power input (W) | 1600 |
| No load speed (rpm) | 5800 |
| Blade diameter (mm) | 184 |
| Bore size (mm) | 30 |
| Max. cutting depth 45° (mm) | 49 |
| Max. cutting depth 90° (mm) | 61 |
| Supplied in | No kitbox or bag supplied |
| Weight (kg) | 4.8 |
| Article Number - 110V | 4933429070 |
| Article Number - 240V | 4933410865 |

184 X 30 MM 40 TOOTH CIRCULAR SAW BLADE WITH 2.1 MM CUTTING WIDTH

Article Number **4932471298**



ROS 150 E-2 | 6" (150 MM) RANDOM ORBIT SANDER

- Random orbital sander with unmatched sanding properties through simultaneous rotation and oscillation of sanding disc
- Reduction gear makes full, efficient use of the powerful 440 W motor
- 6.4 / 3.2 mm orbits for fast removal & finishing
- Variable speed (4000-10,000 rpm) - especially needed for heat-sensitive materials
- Fast and easy change of sandpaper with hook and loop system
- Removable dustbag and also fits standard 26 mm vacuum hose
- Through body sealed slide switch
- Additional handle for a balanced and even weight distribution over the work piece
- Supplied with a dust bag, sanding disc and 4 m cable



| ROS 150 E-2 | |
|---------------------------|---------------------------|
| Power input (W) | 440 |
| No load speed (rpm) | 4000 - 10,000 |
| Oscillation diameter (mm) | 6.4 / 3.2 |
| Sanding pad size (mm) | 150 |
| Weight (kg) | 2.8 |
| Supplied in | No kitbox or bag supplied |
| Article Number 240 V | 4933431180 |

Ø 150 MM, 60 GRIT ABRASIVE DISC - 5 PCS, HOOK AND LOOP

Article Number **4932371591**



ROS 125 E | 5" (125 MM) RANDOM ORBIT SANDER

- Ideal for sanding of wood, metal and plastics within confined spaces
- 300 Watt powerful motor with 2.4 mm orbital action
- Variable speed (7000-12,000 rpm) - especially needed for heat-sensitive materials
- Hook & Loop paper fitment
- Excellent dust extraction - 90% dust collection efficiency with larger dust bag
- Easy to clean dust bag
- On board vac adaptor- fits standard 36 mm vacuum hoses
- Supplied with textile dust bag and sanding paper set (60, 80, 120 grit)



| ROS 125 E | |
|---------------------------|-----------------|
| Power input (W) | 300 |
| No load speed (rpm) | 7000 - 12,000 |
| Oscillation rate (opm) | 14,000 - 26,000 |
| Oscillation diameter (mm) | 2.4 |
| Sanding pad size (mm) | 125 |
| Weight (kg) | 1.7 |
| Supplied in | Tool bag |
| Article Number 240V | 4933433190 |

Ø 125 MM, 60 GRIT ABRASIVE DISC - 5 PCS, HOOK AND LOOP

Article Number **4932367741**



SPS 140 | 1/4" SHEET SANDER

- Powerful 260 W motor for sustained use
- 1.6 mm oscillation movement allows for fine sanding
- Quick connection to dust extractor or dust bag
- Sanding paper is attached by hook and loop or by a clamping system
- 4 m of durable rubber cable allows the user to move easily around his work piece



| SPS 140 | |
|---------------------------|---------------------------|
| Power input (W) | 260 |
| No load speed (rpm) | 14,700 |
| Oscillation rate (opm) | 28,000 |
| Oscillation diameter (mm) | 1.6 |
| Sanding pad size (mm) | 113 x 105 |
| Weight (kg) | 1.6 |
| Supplied in | No kitbox or bag supplied |
| Article Number 240V | 4933447025 |

TSS 1000 | TABLE SAW STAND

- Light weight of only 6.6 kg - easy to transport onto the job site
- Will hold up to 82 kg
- Quick release bracket to hold the saw firmly in place
- One point leg adjustment for leveling on uneven ground
- Comfortable work height at 559 mm
- To be used with M18 FTS210 FUEL™ ONE-KEY™ table saw



| TSS 1000 | |
|--------------------|---------------------------|
| Height (mm) | 559 |
| Bearing force [kg] | 82 |
| Weight (kg) | 6.6 |
| Supplied in | No kitbox or bag supplied |
| Article Number | 4933464227 |

AS 2-250 ELCP 25 L L-CLASS DUST EXTRACTOR

- Large 25 litre tank capacity ideal for workshop use
- 1250 W motor power with over 210 mbar suction - 10% more efficient
- Power take off with auto switching for powertools
- 2600W power take off capacity allows for use with high wattage tools
- Clear press filter cleaning system maintains suction efficiency
- Washable PET filter provides longer filter life
- Dust class L. Standard MAK-factor > 1 mg/m³
- Wet and dry capability
- Hose and cable storage enables easy transportation
- Dust blower function
- 7.5 m rubber cable
- Supplied with 3.5 m hose with floor cleaning kit, PET filter, 2x powertool connection adaptor, 1x disposable bag, 1x fleece bag & 1x crevice nozzle



| AS 2-250 ELCP | |
|----------------------|---------------------------|
| Power input (W) | 1250 |
| Air volume (l/min) | 3600 |
| Max. vacuum (mbar) | 210 |
| Capacity (l) | 25 |
| Hose diameter (mm) | 32 |
| Weight (kg) | 10.4 |
| Supplied in | No kitbox or bag supplied |
| Article Number 240 V | 4933447490 |



Ideal for workshop use



Power take off with auto switching for powertools



Washable PET filter provides longer filter life

MS 216 | 8 1/2" (216 MM) SLIDING MITRE SAW

- 1800 Watt motor for high performance cutting in hard timber
- Durability - dual vertical steel rails with linear bearings deliver smooth sliding action
- Rail lock - the saw head locks in the back position automatically
- Adjustable laser - for perfect and quick alignment to cut line
- Steel detent plate with preset angles - gives repeatable accurate cuts
- Lock lever/handle over mold - allows the user to make repeated cuts comfortably and without fatigue
- Mitre release system - for quick and smooth change of cutting orientation
- Integral LED jobsite light
- Spindle lock - for quick and easy blade change
- Heavy duty cast base and fence ensures durability and accuracy
- 48°/-2° bevel capacity
- Supplied with saw blade (48 teeth), blade spanner and work clamp



| MS 216 SB | |
|---|---------------------------|
| Power input (W) | 1800 |
| No load speed (rpm) | 6000 |
| Blade diameter (mm) | 216 |
| Bevel capacity left (°) | 48 |
| Bevel capacity right (°) | -2 |
| Mitre capacity left (°) | 50 |
| Mitre capacity right (°) | 50 |
| Max. cutting capacity 45° mitre/45° bevel (mm) | 190 x 48 |
| Max. cutting capacity 45° mitre/ 90° bevel (mm) | 190 x 60 |
| Max. cutting capacity 90° mitre/ 45° bevel (mm) | 270 x 48 |
| Max. cutting capacity 90° mitre 90° bevel [mm] | 270 x 60 |
| Bore size (mm) | 30 |
| Weight (kg) | 14.5 |
| Supplied in | No kitbox or bag supplied |
| Article Number 110 V | 4933410925 |
| Article Number 240 V | 4933471054 |

MSL 1000 | MITRE SAW STAND EXTENDABLE UP TO 2 M

- Light weight aluminium, easy to transport onto the job site
- 1.08 m total length, will fit into most small vans and cars
- Extendable each side - 2.08 m extended
- Will hold up to 180 kg
- One point leg adjustment for leveling on uneven ground
- Quick release brackets
- Height adjustable length stops
- Compact foldable design



| MSL 1000 | |
|-----------------------|---------------------------|
| Height (mm) | 850 |
| Base size (mm) | 1065 |
| Extendable up to (mm) | 2125 |
| Collapsed size (mm) | 1065 |
| Bearing force [kg] | 180 |
| Weight (kg) | 17.0 |
| Supplied in | No kitbox or bag supplied |
| Article Number | 4933428970 |

MSL 2000 | MITRE SAW STAND EXTENDABLE UP TO 2.5 M

- Light weight aluminium, easy to transport onto the job site
- 1.09 m total length, will fit into most small vans and cars
- Extendable each side - 2.54 m extended
- Will hold up to 227 kg
- One point leg adjustment for leveling on uneven ground
- Quick release brackets
- Height adjustable length stops
- Compact foldable design with quick release latches



| MSL 2000 | |
|-----------------------|---------------------------|
| Height (mm) | 860 |
| Base size (mm) | 1093 |
| Extendable up to (mm) | 2542 |
| Collapsed size (mm) | 1093 |
| Bearing force [kg] | 227 |
| Weight (kg) | 14.0 |
| Supplied in | No kitbox or bag supplied |
| Article Number | 4933459617 |

HANDTOOLS



DIGITAL LEVELS



- o PINPOINT™ measurement technology provides layers of information to include numeric, graphic, color and audio for advanced readability.
- o PIN Mode allows user to lock in any target within 360° for replicating measurements or finding a specific measurement.
- o Powered by REDLITHIUM™ USB rechargeable battery.
- o Up to 2X greater accuracy.
- o Simple menu selection for quick set-up: Mode, Sensitivity, Tolerance, Power and Language.
- o Tolerance can be adjusted for precision, standard and rough-in work.
- o IP65 rated protects against job site debris.
- o Accurate to: 0°, 90°/0.03° and 1°-89°/0.10°.
- o Durable all-metal hang hole for easy storage.



| | Length [cm] | Pack quantity | Order quantity | Article Number |
|----------------------|-------------|---------------|----------------|----------------|
| Digital level 60 cm | 60 | 1 | 1 | 4933471978 |
| Digital level 120 cm | 120 | 1 | 1 | 4933471979 |



Powered by REDLITHIUM™ USB rechargeable battery



Dynamic readout: delivers enhanced graphics when approaching the target



Auto mode: screen automatically adjusts to the environment based on the amount of light

LEVELS

| | | Magnetic | Length [cm] | Article Number | |
|--------------------------------|--|----------|-------------|----------------|--|
| Digital levels | o PINPOINT™ measurement technology provides layers of information to include numeric, graphic, color and audio for advanced readability. | No | 60 | 4933471978 | |
| | | | 120 | 4933471979 | |
| REDSTICK™ BACKBONE™ box levels | o All-metal BACKBONE™. Strong and durable frame. Reinforced vial retention. o SHARPSITE™ vial technology improves the readability of the vial. o Wide, durable handles for comfort and portability. o Precision milled measuring surface provides accuracy in all working positions. o High contrast vial system is easy to clean and optimises visibility. o Shock absorbing end caps protect the frame. o Overmolded, non-slip grips stick to the wall and prevent sliding. o Durable, all-metal hang hole for storage. o Accurate to 0.029° (0.0005 7/in, 0.5 mm/m) In normal and reverse position. o Amplified rare earth magnets for maximum holding power (only magnetic levels). | Yes | 40 | 4932459061 | |
| | | | 60 | 4932459063 | |
| | | | 80 | 4932459065 | |
| | | | 100 | 4932459067 | |
| | | | 120 | 4932459069 | |
| | | | 180 | 4932459071 | |
| | | | 200 | 4932459073 | |
| | | No | 40 | 4932459060 | |
| | | | 60 | 4932459062 | |
| | | | 80 | 4932459064 | |
| | | | 100 | 4932459066 | |
| | | | 120 | 4932459068 | |
| | | | 180 | 4932459070 | |
| | | | 240 | 4932459074 | |
| REDSTICK™ compact box levels | o SHARPSITE™ vial technology improves the readability of the vial. o Compact and durable frame. o Bottom milled measuring surface provides maximum accuracy. o High contrast vial system is easy to clean and optimises visibility. o Amplified rare earth magnets for maximum holding power (only magnetic levels). o Accurate to 0.029° (0.0005 7/in, 0.5 mm/m) in standard position. o Shock absorbing rubber end caps. | Yes | 40 | 4932459079 | |
| | | | 60 | 4932459081 | |
| | | | 80 | 4932459083 | |
| | | | 100 | 4932459085 | |
| | | | 120 | 4932459087 | |
| | | | 180 | 4932459089 | |
| | | No | 40 | 4932459078 | |
| | | | 60 | 4932459080 | |
| | | | 80 | 4932459082 | |
| | | | 100 | 4932459084 | |
| | | | 120 | 4932459086 | |
| | | | 180 | 4932459088 | |

LEVELS

| | | Magnetic | Length [cm] | Article Number | | | | |
|--------------------------|--|-------------------------|---|----------------|--|----|------------|--|
| Expandable Level | <ul style="list-style-type: none"> Cover any length from 200 cm - 366 cm with laser etched measurements. SHARPSITE™ vial technology improves the readability of the vial. | No | 200 - 366 | 4932471355 | | | | |
| REDSTICK Concrete Levels | <ul style="list-style-type: none"> SHARPSITE™ vial technology improves the readability of the vial. Ergonomic keyhole profile delivers maximum durability and continuous grip across entire level. | No | 60 | 4932459893 | | | | |
| | | | 120 | 4932459894 | | | | |
| | | | 180 | 4932459895 | | | | |
| Slim Box Levels | <ul style="list-style-type: none"> 2 solid acrylic vials. Shockproof and UV resistant. Precision milled measuring surface up to 120 cm provides maximum accuracy. Shock absorbing end caps. Durable hang hole for storage. VPA third party certificate on accuracy. Accurate to 0.029° (0.0005 7/in, 0.5 mm/m) in standard position. | No | 20 | 4932472091 | | | | |
| | | | 40 | 4932459090 | | | | |
| | | | 60 | 4932459091 | | | | |
| | | | 80 | 4932459092 | | | | |
| | | | 100 | 4932459093 | | | | |
| | | | 120 | 4932459094 | | | | |
| | | 180 | 4932459095 | | | | | |
| | | 200 | 4932459590 | | | | | |
| | | REDCAST Die-cast Levels | <ul style="list-style-type: none"> 2 solid acrylic vials. Shockproof and UV resistant. 2 Heavy Duty cast aluminium "anvil" strike pads for trowel blows during tile work. | No | | 40 | 4932464854 | |
| | | | | | | 60 | 4932464855 | |
| 100 | 4932464856 | | | | | | | |
| 180 | 4932464857 | | | | | | | |
| Block Torpedo Level | <ul style="list-style-type: none"> SHARPSITE™ vial technology improves the readability of the vial. | Yes | 25 | 4932459096 | | | | |
| Billet Torpedo Level | <ul style="list-style-type: none"> Amplified rare earth magnets for maximum holding power. Maximised viewing area. Easily read slope in 1/8" or 1/4" per foot in either direction. | Yes | 17 | 4932459097 | | | | |
| Minibox Level | <ul style="list-style-type: none"> Lightweight aluminium box profile fits easily into your tool belt or pocket. Solid acrylic vial. Shockproof and UV resistant vials. Shockproof end caps. | No | 10 | 4932459100 | | | | |
| Pocket Level | <ul style="list-style-type: none"> 360° adjustable vial for reading angles. Locking mechanism for repetitive use in and out of pocket/pouch. Amplified Rare-Earth magnets for maximum holding power. | Yes | 7.8 | 4932459597 | | | | |

TAPE MEASURES

| | Catalogue product description | Length [m] | Blade width (mm) | Order quantity | Article Number | |
|--------------------------------|---|------------|------------------|----------------|----------------|--|
| Tape Measure STUD 2 | <ul style="list-style-type: none"> EXO 360™ blade technology delivers long lasting, rip and wear resistance. Strong magnet at start of the tape allows easy hooking onto flat surfaces and round pipe. Up to 4 m stand out - higher stand out for higher efficiency and higher reach. Anti-tear coating - reinforces the first 15 cm of the blade. 2 sided blade printing - increases the readability. | 5 | 33 | 6 | 4932471626 | |
| | | 8 | 33 | 6 | 4932471627 | |
| | | 5 / 16' | 33 | 6 | 4932471628 | |
| Premium Wide Blade | <ul style="list-style-type: none"> Up to 4 m stand out - higher stand out for higher efficiency and higher reach. Anti-tear coating - reinforces the first 15 cm of the blade. 2 sided blade printing - increases the readability. Impact resistant 5 points - reinforces the frame and makes it more durable. Patented finger stop - protects fingers from blade retraction. Wire form belt clip - reduces pocket tearing. | 5 | 33 | 6 | 4932471815 | |
| | | 8 | 33 | 6 | 4932471816 | |
| | | 5 / 16' | 33 | 6 | 4932471817 | |
| | | 8 / 26' | 33 | 6 | 4932471818 | |
| Magnetic Tape Measures GEN III | <ul style="list-style-type: none"> Strong magnet at start of the tape allows easy hooking onto flat surfaces and round pipe. Compact and ergonomic design. Improved stand out up to 3.4 m. Nylon non-reflective bond blade protection, up to 10x more resistant to jobsite damage. 27 mm blade with double sided printing on tape for easier readability. Patented finger stop: stable when stands alone. 5-point reinforced frame for jobsite durability. | 5 | 27 | 6 | 4932464599 | |
| | | 8 | 27 | 6 | 4932464600 | |
| | | 10 | 27 | 6 | 4932464601 | |
| | | 5 / 16' | 27 | 6 | 4932464602 | |
| | | 8 / 26' | 27 | 6 | 4932464603 | |
| | | 5 | 27 | 6 | 4932464604 | |
| Tape Measure Autolock | <ul style="list-style-type: none"> Autolock brake: tape automatically locks in place as blade is pulled out. Nylon coated blade protection against debris, dirt and water. 5 Point reinforced housing for outstanding tape lifetime. ABS housing with impact resistant overmold for more comfort and jobsite durability. Compact design and comfortable size. Heavy Duty belt clip. | 5 | 25 | 6 | 4932464663 | |
| | | 8 | 25 | 6 | 4932464664 | |
| | | 5 / 16' | 25 | 6 | 4932464665 | |
| | | 8 / 26' | 25 | 6 | 4932464666 | |
| Pro Compact Tape Measures | <ul style="list-style-type: none"> Improved ergonomics and comfortable size. Jobsite durability. 5-point reinforced housing. 2G nylon coated blade protection. Improved tape tear and flexibility. Withstands 3 m drop test. Non magnetic. Heavier font on measurements for better readability. Smaller compact hook design. Back rest for easy vertical measuring. Improved belt clip: more pocket friendly. | 3 | 16 | 12 | 4932459591 | |
| | | 5 | 19 | 12 | 4932459592 | |
| | | 5 | 25 | 6 | 4932459593 | |
| | | 8 | 25 | 6 | 4932459594 | |
| | | 5 / 16' | 25 | 24 | 4932459595 | |
| | | 8 / 26' | 25 | 12 | 4932459596 | |
| Slimline Tape Measures | <ul style="list-style-type: none"> Very compact and improved ergonomic design. Nylon coated blade protection against debris, dirt and water. ABS housing with softgrip rubber gripping area for extra comfort and jobsite durability. 4-point reinforced frame. Flat base for horizontal stability and back rest for easy vertical measuring. Belt clip. Class II accuracy. Orders are only possible in master cartons with 24, 12 or 6 tapes depending on sku. | 3 | 16 | 12 | 48227703 | |
| | | 5 | 19 | 12 | 48227705 | |
| | | 5 | 25 | 6 | 48227706 | |
| | | 8 | 25 | 6 | 48227708 | |
| | | 5/16' | 25 | 24 | 48227717 | |
| 8/26' | 25 | 24 | 48227726 | | | |

LONG TAPES

| | Catalogue product description | Length [m] | Blade width (mm) | Article Number | |
|--------------------------------------|---|------------|------------------|----------------|--|
| Long open tape combi 30m/100ft | <ul style="list-style-type: none"> Steel blade design with nylon clad (extra thick nylon coating) for increased durability. Best in class stretch performance: up to 50% less stretch vs. fibreglass tapes. Ultra durable design: reinforced metal handle and drop durability. 3:1 clutched planetary gearing for 10x longer gear durability and smooth rewind. GRIME GUARD: debris wiper keeps blade clean and clear of abrasive material. Class II accuracy. 2 sided scale printing. Metric measurements shown on the top side and imperial (inches and feet) on the underside of the blade. | 30 | 13 | 48225203 | |
| Long open tape combi 100m/330ft | | 100 | 9.5 | 48225211 | |
| Long closed tape 30m | <ul style="list-style-type: none"> Single sided 30 m metric tape with 9.5 mm blade width. GRIME GUARD: debris wiper keeps blade clean and clear of abrasive material. Ultra durable design: reinforced metal frame housing, reinforced handle and steel blade with nylon coating. 3:1 clutched planetary gearing for 10x longer gear durability and smooth rewind. Class II accuracy | 30 | 9.5 | 48225103 | |
| Fibreglass long tape combi 30m/100ft | <ul style="list-style-type: none"> Fibreglass blade ensures a low tape weight 3:1 clutched planetary gearing for 10x longer gear durability and smooth rewind. GRIME GUARD: debris wiper keeps blade clean and clear of abrasive material. 2 sided scale printing. Metric measurements shown on the top side and imperial (inches and feet) on the underside of the blade. | 30 | 13 | 48225330 | |
| Fibreglass long tape combi 60m/200ft | | 60 | 13 | 48225360 | |

INKZALL™ MARKERS



| | Catalogue product description | Colour | Order quantity | Article Number |
|-----|--|--------------------------------------|----------------|----------------|
| 1. | INKZALL™ marker | Black | 36 | 48223100 |
| 2. | Chisel point marker | Black | 1 | 48223103 |
| 3. | INKZALL™ colour markers | Blue, red, green and black | 1 | 48223106 |
| 4. | INKZALL™ marker | Red | 1 | 48223170 |
| 5. | INKZALL Red L Chisel Tip Marker | Red | 1 | 4932471556 |
| 6. | INKZALL Blue L Chisel Tip Marker | Blue | 1 | 4932471557 |
| 7. | INKZALL Black L Chisel Tip Marker | Black | 1 | 4932471555 |
| 8. | INKZALL Black L Chisel Tip Marker (3PK) | Black | 1 | 4932471554 |
| 9. | INKZALL Red XL Chisel Tip Marker | Red | 1 | 4932471560 |
| 10. | INKZALL Blue XL Chisel Tip Marker | Blue | 1 | 4932471561 |
| 11. | INKZALL Black XL Chisel Tip Marker | Black | 1 | 4932471559 |
| 12. | INKZALL Black XL Chisel Tip Marker (1PK) | Black | 1 | 4932471558 |
| 13. | INKZALL™ marker with stylus | Black | 1 | 48223101 |
| 14. | INKZALL™ liquid paint marker - yellow | Yellow | 12 | 48223721 |
| 15. | INKZALL™ liquid paint marker - white | White | 12 | 48223711 |
| 16. | INKZALL™ liquid paint marker - black | Black | 12 | 48223731 |
| 17. | INKZALL™ highlighter - yellow | Yellow | 1 | 48223201 |
| 18. | INKZALL™ highlighter - coloured | Yellow, pink, orange, green and blue | 1 | 48223206 |
| 19. | INKZALL™ fine tip markers | Black | 1 | 48223154 |
| 20. | INKZALL™ fine tip pens (4pc) - black | Black | 1 | 48223164 |
| 21. | INKZALL™ fine tip pens (4pc) - coloured | Black, red and blue | 1 | 48223165 |

KNIVES



| | | Article Number |
|-----|--------------------------------------|---|
| 1. | FASTBACK™ flip utility knife | 4932471357 |
| 2. | FASTBACK™ compact flip utility knife | 4932471358 |
| 3. | FASTBACK™ folding knife | 4932471356 |
| 4. | Fixed blade knife | 48221990 |
| 5. | Hawkbill Knife | The fixed blade knife is designed for optimal edge retention and durability 4932471361 |
| 6. | Hardline™ folding knife smooth | The hawkbill fixed blade knife is ideal for stripping wire and cable. 4932464829 |
| 7. | Hardline™ folding knife serrated | 48221994 |
| 8. | Hardline Fixed Blade | Smooth / serrated 75mm blade and piercing tip. Ideal for tearing through material and tip allows controlled piercing. 48221998 |
| 9. | Sliding utility knife | 5" (127mm) AUS-8 Steel blade allows the blade to hold its edge longer, reducing the user's need to sharpen. 4932464830 |
| 10. | Self-retracting safety knife | Side blade activation: Reduces the risk of exposing the blade accidentally. 4932471359 |
| 11. | Snap knife 9 mm | Self-retract mechanism: Retracts blade when the button is released. 4932471360 |
| 12. | Snap knife 18 mm | 48221960 |
| 13. | Snap knife 25 mm | Iron carbide blade for longer lifetime, increased sharpness and clean cut finish. 48221961 |
| 14. | Safety cutter | 48221962 |
| 15. | Safety cutter | Reduce cut injuries thanks to recessed blade prevents contact with fingers. 48221916 |

RATCHET AND SOCKET SETS

- 90 tooth design with 4 degrees of arc swing for tight work spaces.
- Comes with a removable inner tray perfectly designed to be stored.
- Sockets are stamped with measurements on the flat side for easy-to-read visibility.
- All metal design for maximum durability.
- FOUR FLAT™ sides on socket deter rolling.
- Slim profile head with flush direction lever offers better accessibility.



| | Contents | Article Number | |
|---|--|----------------|--|
| 1/4 Drive 28 pc Ratchet + Socket Set Metric | Standard sockets: 5 mm, 5.5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm / Deep well sockets: 5 mm, 5.5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm | 4932464943 | |
| 1/4 50 pc Drive Ratchet + Socket Set SAE + Metric | Standard sockets: 5/32", 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2", 5/8", 3/4", 5 mm, 5.5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm / Deep well socket: 5/32", 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2", 9/16", 5 mm, 5.5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm | 4932464944 | |
| 3/8 Drive 32 pc Ratchet + Socket Set Metric | Standard sockets: 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm / Deep well sockets: 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm | 4932464945 | |
| 3/8 Drive 56 pc Ratchet + Socket Set SAE + Metric | Standard sockets: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm / Deep well sockets: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm | 4932464946 | |
| 1/2 Metric Ratchet + Socket Set | Standard sockets: 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm, 20 mm, 21 mm, 22 mm, 23 mm, 24 mm / Deep well sockets: 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm / 3" extension, 5" extension & removable storage tray | 4932471864 | |

VDE SLIM SCREWDRIVERS

- VDE tested to 10, 000 V and guaranteed to 1,000 V.
- Premium quality steel with molybdenum and vanadium for flexibility and lifetime.
- CNC milled tips for high precision for best fit and reduced camout effect.
- Black phosphate on the tip for grip and corrosion resistance.
- Slim shank diameter for access to low lying screw applications.
- 2 component grip with softgrip for comfortable handling.
- 3 sided design for non slip and maximum power transfer.
- Slim design at handle for low power/torque applications and fine electrical work.
- Laser engraved with the reception on the top of handle for easy identification.
- Anti roll, 3 sided collar on handle.



| | Catalogue product description | Article Number | |
|--------------------------------|--|----------------|--|
| SL | VDE Slim S/Driver SL 0,5x3x100 -1pc | 4932471445 | |
| | VDE Slim S/Driver SL 0,8x4x100 -1pc | 4932471446 | |
| | VDE Slim S/Driver SL 1,0x5,5x125 -1pc | 4932471447 | |
| Phillips | VDE Slim S/Driver PH1 x80 -1pc | 4932471448 | |
| | VDE Slim S/Driver PH2 x100 -1pc | 4932471449 | |
| Pozidrive | VDE Slim S/Driver PZ1 x80 -1pc | 4932471450 | |
| | VDE Slim S/Driver PZ2 x100 -1pc | 4932471451 | |
| VDE slim screwdriver set (5pc) | SL3 / SL4 / SL5.5 / PZ1 / PZ2 | 4932471452 | |
| VDE slim screwdriver set (7pc) | SL3 / SL4 / SL 5.5 / PH1 / PH2 / PZ1 / PZ2 | 4932471453 | |

VDE SCREWDRIVERS

- VDE tested to 10, 000 V and guaranteed to 1,000 V.
- Premium quality steel with molybdenum and vanadium for flexibility and lifetime.
- CNC milled tips for high precision for best fit and reduced camout effect.
- Black phosphate on the tip for grip and corrosion resistance.
- 2 component grip with softgrip for comfortable handling.
- 3 sided design for non slip and maximum power transfer.
- Slim design at front for low power/torque applications and fine electrical work.
- Laser engraved with the reception on the top of handle for easy identification.
- Anti roll, 3 sided collar on handle.



| | Catalogue product description | Article Number | |
|-----------------------------|---|----------------|--|
| SL | SL 0.4 x 2.5 x 75 | 4932464034 | |
| | SL 0.5 x 3 x 100 | 4932464035 | |
| | SL 0.6 x 3.5 x 100 | 4932464036 | |
| | SL 0.8 x 4 x 100 | 4932464037 | |
| | SL 1.0 x 5.5 x 125 | 4932464038 | |
| | SL 1.2 x 6.5 x 150 | 4932464039 | |
| Phillips | SL 1.2 x 8 x 175 | 4932464040 | |
| | SL 0.5 x 3 x 65 | 4932464041 | |
| | PH0 x 60 | 4932464042 | |
| Phillips | PH1 x 80 | 4932464043 | |
| | PH2 x 100 | 4932464044 | |
| | PH3 x 150 | 4932464045 | |
| Pozidrive | PZ0 x 60 | 4932464046 | |
| | PZ1 x 80 | 4932464047 | |
| | PZ2 x 100 | 4932464048 | |
| Torx | PZ3 x 150 | 4932464049 | |
| | T10 x 60 | 4932464050 | |
| | T15 x 75 | 4932464051 | |
| | T20 x 100 | 4932464052 | |
| | T25 x 100 | 4932464053 | |
| Phillips / SL | T30 x 100 | 4932464054 | |
| | PH/SL1 x 80 | 4932464055 | |
| Pozidrive / SL | PH/SL2 x 100 | 4932464056 | |
| | PZ/SL1 x 80 | 4932464057 | |
| Socket Wrench | PZ2/SL2 x 100 | 4932464058 | |
| | SW6 x 125 | 4932464059 | |
| | SW7 x 125 | 4932464060 | |
| | SW8 x 125 | 4932464061 | |
| | SW9 x 125 | 4932464062 | |
| | SW10 x 125 | 4932464063 | |
| | SW11 x 125 | 4932464064 | |
| SW13 x 125 | 4932464065 | | |
| VDE screwdriver set (5pc) | SL3 / SL4, PZ1 / PZ2 and voltage tester | 4932464066 | |
| VDE Screwdriver set 1 (7pc) | SL2.5 / SL3 / SL4, PH2, PZ1 / PZ2 and voltage tester | 4932464067 | |
| VDE Screwdriver set 2 (7pc) | SL2.5 / SL3 / SL4 / SL5.5, PH1 / PH2 and voltage tester | 4932464068 | |

VDE PLIERS

| | Total length (mm) | Cutting capacity in very hard wire 2300N/mm ² [Max. Ø mm] | Cutting capacity in hard wire 1800N/mm ² [Max. Ø mm] | Cutting capacity in soft wire 220N/mm ² [Max. Ø mm] | Cutting capacity in cable Al and Cu [Max. Ø mm] | Capacity [mm] | Capacity Pipe [Max. Ø mm] | Weight (g) | Article Number | |
|---|-------------------|--|---|--|---|---------------|---------------------------|------------|----------------|--|
| VDE cable cutter | 160 | - | - | - | 16 | - | - | 185 | 4932464562 | |
| | 210 | - | - | - | 25 | - | - | 315 | 4932464563 | |
| VDE long round nose plier | 205 | - | 2.2 | 3.9 | - | - | - | 200 | 4932464564 | |
| VDE long 45 deg. round nose pliers | 205 | - | 2.2 | 3.9 | - | - | - | 200 | 4932464565 | |
| VDE diagonal cutter | 145 | - | 1.7 | 5 | 8 | - | - | 160 | 4932464566 | |
| | 160 | - | 2 | 6 | 11 | - | - | 210 | 4932464567 | |
| | 180 | - | 2.5 | 7 | 13 | - | - | 240 | 4932464568 | |
| VDE heavy duty diagonal cutter | 180 | 2.2 | 2.6 | 7 | 13 | - | - | 250 | 4932464569 | |
| | 200 | 2.5 | 2.8 | 8 | 15 | - | - | 305 | 4932464570 | |
| VDE combination plier | 165 | - | 2 | 4 | 10 | - | - | 180 | 4932464571 | |
| | 180 | - | 2.2 | 5.2 | 12 | - | - | 250 | 4932464572 | |
| VDE wire stripping plier | 160 | - | - | - | 0.75mm ² - 6mm ² | - | - | 180 | 4932464573 | |
| VDE water pump plier | 240 | - | - | - | - | 50 | 50 | 395 | 4932464574 | |
| VDE Plier Set (3 pc) - Diagonal cutter (160 mm), long nose plier (205 mm), combi plier (180 mm) | | | | | | | | 660 | 4932464575 | |

OVER 500 HAND TOOLS AVAILABLE



Nothing but **HEAVY DUTY.**™

PACKOUT™



HARDLINE™

FASTBACK™

TINKZALL™

CHEATER™

TORQUE LOCK™

MILWAUKEE® INTRODUCTION 2 - 3

M18™ RANGE

M18™ SUMMARY 4 - 5

M18 FUEL™ INTRODUCTION 6 - 7

REDLITHIUM™-ION BATTERY INTRODUCTION 8 - 9

ONE-KEY™ INTRODUCTION 10 - 11

C18 HZ M18™ HACKZALL™ 41

C18 PCG/310 M18™ CAULK GUN WITH 310 ML CANISTER 46

C18 PCG/400 M18™ CAULK GUN WITH 400 ML TUBE 46

C18 PCG/600 M18™ CAULK GUN WITH 600 ML TUBE 46

C18 RAD M18™ COMPACT RIGHT ANGLE DRILL 20

HD18 AG-115 M18™ 115 MM ANGLE GRINDER WITH PADDLE SWITCH 31

HD18 BS M18™ METAL BANDSAW 32

HD18 CS M18™ 55 MM CIRCULAR SAW FOR WOOD AND PLASTIC 37

HD18 HX M18™ 4-MODE SDS-PLUS HAMMER WITH FIXTEC CHUCK 14

M12-18 JSSP M12™ - M18™ BLUETOOTH® SPEAKER 49

M18 AF M18™ AIR FAN 47

M18 BBL M18™ BATTERY BLOWER 47

M18 BH M18™ COMPACT 2-MODE SDS-PLUS HAMMER 15

M18 BHG M18™ HEAT GUN 45

M18 BIW12 M18™ 1/2" IMPACT WRENCH 27

M18 BIW38 M18™ 3/8" IMPACT WRENCH 27

M18 BJS M18™ TOP HANDLE JIGSAW 41

M18 BLCS66 M18™ BRUSHLESS 66 MM CIRCULAR SAW FOR WOOD AND PLASTICS 37

M18 BLID2 M18™ BRUSHLESS 1/4" HEX IMPACT DRIVER 22

M18 BLPD2 M18™ BRUSHLESS PERCUSSION DRILL 18

M18 BMS12 M18™ METAL SHEAR 31

M18 BMS20 M18™ METAL SHEAR 31

M18 BMT M18™ MULTI-TOOL 34

M18 BOS125 M18™ 125 MM RANDOM ORBITAL SANDER 42

M18 BP M18™ PLANER 42

M18 BRAID M18™ RIGHT ANGLE IMPACT DRIVER 22

M18 BRAIW M18™ 3/8" RIGHT ANGLE IMPACT WRENCH 27

M18 BSX M18™ SAWZALL™ 39

M18 BTP M18™ COMPACT RTRANSFER PUMP 45

M18 CAG115XPDB M18 FUEL™ 115 MM BRAKING GRINDER WITH PADDLE SWITCH 30

M18 CBS125 M18 FUEL™ DEEP CUT BAND SAW 32

M18 CCS55 M18 FUEL™ 55 MM CIRCULAR SAW FOR WOOD AND PLASTICS 37

M18 CDEX M18 FUEL™ SDS-PLUS DUST EXTRACTOR 15

M18 CHM M18 FUEL™ 5 KG SDS-MAX DRILLING AND BREAKING HAMMER 13

M18 CHPX M18 FUEL™ HIGH PERFORMANCE 4-MODE SDS-PLUS HAMMER WITH FIXTEC CHUCK 13

M18 CHX M18 FUEL™ 4-MODE SDS-PLUS HAMMER WITH FIXTEC CHUCK 14

M18 CRAD M18 FUEL™ RIGHT ANGLE DRILL 20

M18 CV M18™ HAND VAC 44

M18 FAP M18 FUEL™ POLISHER 33

M18 FBJS M18 FUEL™ BODY GRIP JIGSAW 41

M18 FBL M18 FUEL™ BLOWER 97

M18 FBPV M18 FUEL™ BACKPACK VACCUUM 44

M18 FCHS M18 FUEL™ CHAINSAW 96

M18 FCHSC M18 FUEL™ COMPACT CHAINSAW 96

M18 FCOS230 M18 FUEL™ CUT OFF SAW 28

M18 FCS66 M18 FUEL™ 66 MM CIRCULAR SAW FOR WOOD AND PLASTICS 36

M18 FDG M18 FUEL™ DIE GRINDER 33

M18 FHM M18 FUEL™ ONE-KEY™ 8 KG SDS-MAX DRILLING AND BREAKING HAMMER 12

M18 FHZ M18 FUEL™ HACKZALL™ 40

M18 FID2 M18 FUEL™ 1/4" HEX IMPACT DRIVER 21

M18 FJS M18 FUEL™ TOP HANDLE JIGSAW 41

M18 FLAG230XPDB M18 FUEL™ 230 MM LARGE BRAKING GRINDER WITH PADDLE SWITCH 29

M18 FMCS M18 FUEL™ METAL SAW 33

M18 FMDP M18 FUEL™ MAGNETIC DRILLING PRESS WITH PERMANENT MAGNET 29

M18 FMS190 M18 FUEL™ 190 MM MITRE SAW 35

M18 FMS254 M18 FUEL™ 254 MM MITRE SAW 35

M18 FMTIWF12 M18 FUEL™ 1/2" MID TORQUE IMPACT WRENCH WITH FRICTION RING 25

M18 FPD2 M18 FUEL™ PERCUSSION DRILL 17

M18 FPFT M18 FUEL™ POWERED FISH TAPE 105

M18 FPM M18 FUEL™ PADDLE MIXER 28

M18 FQID M18 FUEL™ SURGE™ 1/4" HEX HYDRAULIC IMPACT DRIVER 22

M18 FRAD2 M18 FUEL™ SUPER HAWG® 2-SPEED RIGHT ANGLE DRILL DRIVER 19

M18 FRADH M18 FUEL™ SUPER HAWG® 2-SPEED RIGHT ANGLE DRILL DRIVER WITH QUIK-LOK™ 20

M18 FSG M18 FUEL™ SCREW GUN 23

M18 FSGC M18 FUEL™ SCREW GUN WITH COLLATED ATTACHMENT 23

M18 FSX M18 FUEL™ SUPER SAWZALL™ 40

M18 FTS210 M18 FUEL™ ONE-KEY™ TABLE SAW 38

M18 GG M18™ GREASE GUN 47

M18 JSR M18™ JOBSITE RADIO 49

M18 JSR DAB+ M18™ JOBSITE RADIO DAB+ 48

M18 ONEFHWF1 M18 FUEL™ ONE-KEY™ 1" HIGH TORQUE IMPACT WRENCH WITH FRICTION RING 24

M18 ONEFHWF12 M18 FUEL™ ONE-KEY™ 1/2" HIGH TORQUE IMPACT WRENCH WITH FRICTION RING 25

M18 ONEFHWF34 M18 FUEL™ ONE-KEY™ 3/4" HIGH TORQUE IMPACT WRENCH WITH FRICTION RING 25

M18 ONEID2 M18 FUEL™ ONE-KEY™ 1/4" HEX IMPACT DRIVER 21

M18 ONEIWF12 M18 FUEL™ ONE-KEY™ 1/2" IMPACT WRENCH WITH FRICTION RING 26

M18 ONEIWF12 M18 FUEL™ ONE-KEY™ 1/2" IMPACT WRENCH WITH PIN DETENT 26

M18 ONEPD2 M18 FUEL™ ONE-KEY™ 190 MM MITRE SAW 16

M18 ONESX M18 FUEL™ ONE-KEY™ SAWZALL™ 39

M18 RC M18™ JOBSITE RADIO/CHARGER WITH BLUETOOTH® 49

M18 SMS216 M18™ 216 MM MITRE SAW 35

M18 VC2 M18™ WET/DRY VACUUM 44

M18-28 CPDEX M18-28 FUEL™ SDS-PLUS DUST EXTRACTOR 15

M18™ POWERPACKS

M18 BLP2A2 M18™ BRUSHLESS POWERPACK 51

M18 FPP2A2 M18 FUEL™ POWERPACK 51

M18 FPP6D2 M18 FUEL™ POWERPACK 50

M18 ONEPP2A2 M18 FUEL™ ONE-KEY™ POWERPACK 50

M12™ RANGE

M12™ SUMMARY 60 - 61

M12 FUEL™ INTRODUCTION 62 - 63

C12 HZ M12™ SUB COMPACT HACKZALL™ 69

C12 JSR M12™ SUB COMPACT RADIO WITH MP3 PLAYER CONNECTION 77

C12 MT M12™ SUB COMPACT MULTI-TOOL 72

C12 PC M12™ SUB COMPACT COPPER PIPE CUTTER 76

C12 PN M12™ SUB COMPACT PALM NAILER 71

C12 RAD M12™ SUB COMPACT RIGHT ANGLE DRILL 60

C12 RT M12™ SUB COMPACT ROTARY TOOL 72

M12 BD M12™ SUB COMPACT DRIVER 61

M12 BDD M12™ SUB COMPACT DRILL DRIVER 60

M12 BDDX M12™ SUB COMPACT DRILL DRIVER WITH REMOVABLE CHUCK 59

M12 BI M12™ SUB COMPACT INFLATOR 69

M12 BID M12™ SUB COMPACT 1/4" HEX IMPACT DRIVER 62

M12 BIW12 M12™ SUB COMPACT 1/2" IMPACT WRENCH 64

M12 BIW38 M12™ SUB COMPACT 3/8" IMPACT WRENCH 65

M12 BPD M12™ SUB COMPACT PERCUSSION DRILL 59

M12 BPRT M12™ SUB COMPACT RIVET TOOL 71

M12 BPS M12™ SUB COMPACT POLISHER / SANDER 74

M12 BRAID M12™ SUB COMPACT RIGHT ANGLE IMPACT DRIVER 63

M12 BS M12™ SUB COMPACT BANDSAW 72

M12 BST M12™ SUB COMPACT STAPLER 70

M12 CCS44 M12 FUEL™ SUB COMPACT CIRCULAR SAW 70

M12 CD M12 FUEL™ SUB COMPACT DRIVER 60

M12 CH M12 FUEL™ SUB COMPACT SDS-PLUS HAMMER 56

M12 CHZ M12 FUEL™ SUB COMPACT HACKZALL™ 69

M12 DE M12™ UNIVERSAL HAMMER VAC 57

M12 FCOT M12 FUEL™ SUB COMPACT MULTI-MATERIAL CUT-OFF TOOL 73

M12 FDD M12 FUEL™ SUB COMPACT DRILL DRIVER 58

M12 FID M12 FUEL™ SUB COMPACT 1/4" HEX IMPACT DRIVER 61

M12 FIR12 M12 FUEL™ SUB COMPACT 1/2" RATCHET 67

M12 FIR14 M12 FUEL™ SUB COMPACT 1/4" RATCHET 68

M12 FIR14LR M12 FUEL™ EXTENDED REACH 1/4" RATCHET 67

M12 FIR38 M12 FUEL™ SUB COMPACT 3/8" RATCHET 67

M12 FIR38LR M12 FUEL™ EXTENDED REACH 3/8" RATCHET 66

M12 FIW14 M12 FUEL™ SUB COMPACT 1/4" IMPACT WRENCH 64

M12 FIW38 M12 FUEL™ SUB COMPACT 3/8" IMPACT WRENCH 64

M12 FIWF12 M12 FUEL™ SUB COMPACT 1/2" IMPACT WRENCH 63

M12 FPD M12 FUEL™ SUB COMPACT PERCUSSION DRILL 57

M12 FPDX M12 FUEL™ SUB COMPACT PERCUSSION DRILL WITH REMOVABLE CHUCK 59

M12 FQID M12 FUEL™ SURGE™ 1/4" HEX HYDRAULIC IMPACT DRIVER 62

M12 GG M12™ SUB COMPACT GREASE GUN 74

M12 H M12™ SUB COMPACT SDS-PLUS HAMMER 56

M12 HV M12™ SUB COMPACT STICK VAC 74

M12 IR M12™ SUB COMPACT RATCHET 68

M12 JS M12™ SUB COMPACT JIGSAW 70

M12 JSSP M12™ JOBSITE BLUETOOTH® SPEAKER 77

M12 ONEFTR12 M12 FUEL™ ONE-KEY™ 1/2" DIGITAL TORQUE WRENCH 65

M12 ONEFTR38 M12 FUEL™ ONE-KEY™ 3/8" DIGITAL TORQUE WRENCH 66

M12 PCG/310 M12™ SUB COMPACT CAULK GUN WITH 310 ML CARTRIDGE HOLDER 75

M12 PCG/400 M12™ SUB COMPACT CAULK GUN WITH 400 ML TUBE 75

M12 PCG/600 M12™ SUB COMPACT CAULK GUN WITH 600 ML TUBE 75

M12 SI M12™ SUB COMPACT SOLDERING IRON 68

M12-18 JSSP M12™ - M18™ BLUETOOTH® SPEAKER 77

M12™ POWERPACKS

M12 BPP2B M12™ POWERPACK 79

M12 BPP4A M12 FUEL™ POWERPACK 79

M12 FPP2A M12 FUEL™ POWERPACK 78

M12 FPP2AQ M12 FUEL™ POWERPACK 78

M12SET1F M12 FUEL™ POWERPACK 79

T&M TOOLS

2212-20 AUTO VOLTAGE / CONTINUITY TESTER 82

2267-40 10:1 INFRARED TEMP-GUN™ 82

2309-60 ALKALINE INSPECTION CAMERA 82

LDM 30 30 M LASER DISTANCE METER 83

LDM 50 50 M LASER DISTANCE METER 83

M12 IC M12™ SUB COMPACT M-SPECTOR™ 360° CAMERA 81

M12 IC AV3 M12™ DIGITAL INSPECTION CAMERA 81

WORKGEAR

EQUIPMENT 88

M12 HH GREY3 M12™ GREY HEATED HOODIE 86

M12 HJ BL4 M12™ PREMIUM HEATED JACKET 86

M12 HJP M12™ HEATED HYBRID PUFFER JACKET 85

PACKOUT™ ADAPTOR HD BOX 91

PACKOUT™ BACKPACK 93

PACKOUT™ BOX 91

PACKOUT™ COMPACT ORGANISER 92

PACKOUT™ COMPACT SLIM ORGANISER 92

PACKOUT™ CRATE 91

PACKOUT™ DUFFEL BAG 93

PACKOUT™ FLAT TROLLEY 91

PACKOUT™ FOAM INSERTS 91

PACKOUT™ INTRODUCTION 90

PACKOUT™ JOBSITE COOLER 93

PACKOUT™ MOUNTING PLATE 91

PACKOUT™ ORGANISER 92

PACKOUT™ SLIM ORGANISER 92

PACKOUT™ TECH BAG 93

PACKOUT™ TOTE TOOLBAG 92

PACKOUT™ TROLLEY BOX 91

WORK GLOVES 86 - 87

DRAIN CLEANERS

M12 BDC6 M12™ SUB COMPACT DRAIN CLEANER WITH SPIRAL DIAMETER 6 MM 102

M12 BDC8 M12™ SUB COMPACT DRAIN CLEANER WITH SPIRAL DIAMETER 8 MM 102

M12™ DRAIN CLEANER ACCESSORIES 106

M18 FDCPF10 M18 FUEL™ DRAIN CLEANER - POWER FEED 10 MM 103

M18 FDCPF8 M18 FUEL™ DRAIN CLEANER - POWER FEED 8 MM 102

M18 FFSDC10 M18 FUEL™ FREE STANDING DRAIN CLEANER 10 MM 103

M18 FFSDC16 M18 FUEL™ FREE STANDING DRAIN CLEANER 16 MM 104

M18 FS DRAIN CLEANER ACCESSORIES 106 - 107

M18 PF DRAIN CLEANER ACCESSORIES 106 - 107

| TRUEVIEW™ HIGH DEFINITION LIGHTING | | |
|------------------------------------|---|-----|
| FL-LED | ALKALINE FLOOD LIGHT | 121 |
| HL2-LED | ALKALINE SLIM HEADLAMP | 120 |
| HL-SF | ALKALINE SPOT FLOOD HEADLAMP | 121 |
| HOBL 7000 | HIGH OUTPUT BAY LIGHT | 113 |
| IPL-LED | ALKALINE PEN LIGHT | 120 |
| M12 AL | M12™ LED AREA LIGHT | 114 |
| M12 LL | M12™ LED LANTERN LIGHT | 116 |
| M12 MLED | M12™ LED HIGH PERFORMANCE FLASHLIGHT | 117 |
| M12 SAL | M12™ STAND LIGHT | 113 |
| M12 SL | M12™ LED STICK LIGHT | 116 |
| M12 SLED | M12™ LED SPOT LIGHT | 115 |
| M12 TLED | M12™ LED TORCH | 117 |
| M12 UHL | M12™ LED UNDERHOOD LIGHT | 115 |
| M18 AL | M18™ LED AREA LIGHT | 114 |
| M18 HAL | M18™ HIGH PERFORMANCE LED AREA LIGHT | 113 |
| M18 HSAL | M18™ HIGH PERFORMANCE LED STAND LIGHT CHARGER | 111 |
| M18 IL | M18™ LED INSPECTION LIGHT | 115 |
| M18 LL | M18™ LED LANTERN LIGHT | 116 |
| M18 ONERSAL | M18™ ONE-KEY™ LED REMOTE STAND LIGHT | 112 |
| M18 ONESLDP | M18™ ONE-KEY™ LED COMPACT SITE LIGHT CHARGER | 110 |
| M18 ONESLSP | M18™ ONE-KEY™ LED COMPACT SITE LIGHT | 110 |
| M18 PAL | M18™ PIVOTING AREA LIGHT | 113 |
| M18 SAL | M18™ LED STAND LIGHT | 112 |
| M18 SLED | M18™ LED SEARCH LIGHT | 114 |
| M18 TAL | M18™ TRADESMAN AREA LIGHT | 111 |

| M18 TLED | M18™ LED TORCH ML-LED ALKALINE FLASHLIGHT | 117 |
|------------------------|--|-----|
| M28™ RANGE | | |
| M18-28 CPDEX | M18-28 FUEL™ SDS-PLUS DUST EXTRACTOR | 123 |
| M28 CHPX | M28 FUEL™ 4-MODE SDS-PLUS HAMMER WITH FIXTEC CHUCK | 123 |
| BATTERIES AND CHARGERS | | |
| CHARGERS | | 124 |
| M12™ BATTERIES | | 125 |
| M18™ BATTERIES | | 125 |
| OTHER BATTERIES | | 125 |
| CONSTRUCTION | | |
| DCM 2-250 C | DIAMOND DRILLING MOTOR | 133 |
| DCM 2-350 C | DIAMOND DRILLING MOTOR | 132 |
| DD 2-160 XE | 2-SPEED DRY DIAMOND DRILL | 132 |
| DD 3-152 | 3-SPEED COMBI DIAMOND DRILL | 131 |
| DR 152 T | DIAMOND DRILL STAND FOR DD 3-152 | 131 |
| DR 250 TV | DIAMOND DRILL STAND FOR DCM 2-250 C | 133 |
| DR 350 T | DIAMOND DRILL STAND FOR DCM 2-350 C | 132 |
| K 1000 S | 10 KG CLASS SDS-MAX BREAKING HAMMER | 128 |
| K 1528 H | 16 KG CLASS 28 MM HEX BREAKING HAMMER | 128 |
| K 2500 H | 25 KG CLASS 28 MM HEX BREAKING HAMMER | 128 |
| K 500 S | 5 KG CLASS BREAKING HAMMER | 131 |
| K 500 ST | 5 KG CLASS TRADESMAN BREAKING HAMMER | 130 |
| K 540 S | 5 KG CLASS DRILLING AND BREAKING HAMMER | 130 |
| K 545 S | 5 KG CLASS DRILLING AND BREAKING HAMMER | 130 |
| K 750 S | 7 KG CLASS DRILLING AND BREAKING HAMMER | 129 |

| K 900 | 10 KG CLASS BREAKING HAMMER | 129 |
|---------------|--|-----|
| K 950 S | 10 KG CLASS DRILLING AND BREAKING HAMMER | 129 |
| WCE 30 | 1500 W 125 MM (30 MM DOC) WALL CHASER | 133 |
| METALWORKING | | |
| AG 800 E | 800 W ANGLE GRINDER | 137 |
| AGV 10 EK | 1000 W ANGLE GRINDER WITH AVS | 137 |
| AGV 13 XSPDE | 1250 W ANGLE GRINDER WITH AVS AND SLIM PADDLE SWITCH | 137 |
| AGV 17 | 1750 W ANGLE GRINDER WITH AVS | 136 |
| AGV 22 | 2200 W ANGLE GRINDER WITH AVS | 136 |
| AP 12 E | 1200 W POLISHER WITH ELECTRONIC VARIABLE SPEED | 138 |
| AP 14-2 200 E | 1450 W POLISHER | 138 |
| BS 125 | DEEP CUT BAND SAW | 139 |
| CHS 355 | 2300 W CHOPSAW | 139 |
| MCS 66 | DRY CUT METAL CIRCULAR SAW | 138 |
| MDE 41 | MAGNETIC DRILLING PRESS WITH ELECTRO MAGNET | 139 |
| WOODWORKING | | |
| AS 2-250 ELCP | 25 L L-CLASS DUST EXTRACTOR | 146 |
| CS 60 | 184 MM CIRCULAR SAW (61 MM DOC) | 144 |
| CS 85 CBE | 235 MM CIRCULAR SAW (85 MM DOC) | 144 |
| CS 85 SB | 235 MM CIRCULAR SAW (85 MM DOC) | 143 |
| JSPE 135 | HEAVY DUTY TOP HANDLE JIGSAW | 143 |
| MS 216 8 | 1/2" (216 MM) SLIDING MITRE SAW | 146 |
| MSL 1000 | MITRE SAW STAND EXTENDABLE UP TO 2 M | 147 |
| MSL 2000 | MITRE SAW STAND EXTENDABLE UP TO 2.5 M | 147 |
| ROS 125 E | 5" (125 MM) RANDOM ORBIT SANDER | 145 |

| ROS 150 E-2 | 6" (150 MM) RANDOM ORBIT SANDER | 145 |
|-------------------------|---------------------------------|-----------|
| SPS 140 | 1/4" SHEET SANDER | 145 |
| SSD 1100 X | 1100 W SAWZALL™ | 143 |
| SSPE 1500 X | 1500 W SUPER SAWZALL™ | 142 |
| TSS 1000 | TABLE SAW STAND | 146 |
| TSS 1000 | TABLE SAW STAND | 122 |
| HANDTOOLS | | |
| DIGITAL LEVELS | | 150 |
| INKZALL™ MARKERS | | 155 |
| KNIVES | | 156 |
| LEVELS | | 151 - 152 |
| LONG TAPES | | 154 |
| RATCHET AND SOCKET SETS | | 157 |
| TAPE MEASURES | | 153 |
| VDE PLIERS | | 160 |
| VDE SCREWDRIVERS | | 159 |
| VDE SLIM SCREWDRIVERS | | 158 |
| INDEX | | 162 - 164 |

OVER 3100 ACCESSORIES AVAILABLE



Nothing but **HEAVY DUTY.**™



THUNDERWEB™



SHOCKWAVE  IMPACT DUTY

THE **TORCH**™
CARBIDE TEETH





Nothing but **HEAVY DUTY.**[™]

Techtronic Industries UK Ltd

Ground Floor
Unit 3 Globeside Business Park
Fieldhouse Lane
Marlow
Bucks
SL7 1HZ
Tel: +44 (0) 1628 894400
Fax: +44 (0) 1628 894401

Distributed by: